


Baseus

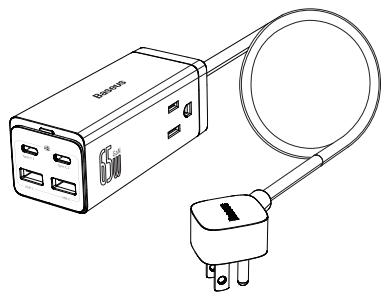


PowerCombo PowerStrip 65W 2AC+2U+2C User Manual

Please Read This User Manual Completely And Keep It Properly

1. Product Introduction

This product is a power strip with an extension cord, four DC outputs and two AC. The AC to DC module are made of new semiconductor material (GaN), with a total output power of 65W. It has a small size and various interfaces (2 Outlets+2USB+2Type-C), compatible with multiple fast charging protocols such as QC4+, PD3.0, QC3.0, QC2.0, SCP, FCP, AFC, and PE+. The maximum output power of Type-C1 and Type-C2 is 65W (20V / 3.25A) when they are used separately, which can provide full speed fast charging for most laptops. When use 4 ports simultaneously, Type-C1 port can still be used to fast charge most phones and laptops, such as IP PD fast charging, Huawei 22.5W SCP, Samsung 45W, Xiaomi 27W devices. Multiple safety protection circuits are built in such as over-current, over-voltage, and temperature protection.

2. Schematic Display of Product



3. Product Parameter

Brand: Baseus
Name: Extension Cord Set (With 65W GaN Charger)
Model No.: CCGAN65-2ACS
Material: PC
Color: Black
Rated Voltage: 125V~, 60Hz
Rated Power: 1250W Max.
Rated Current: 10A Max.
USB Input: AC 100-125V~, 50/60Hz, 1.5A Max.
Type-C1/Type-C2 Output: 5V/9V/12V/15V=3A; 20V=3.25A
USB1 Output: 5V=1A
USB2 Output: 5V/9V/12V/20V=3A
Type-C1+Type-C2 Output: 45W+20W
Type-C2+USB2 Output: 15W
Type-C1+USB2 Output: 45W+18W
Type-C1/Type-C2+USB1 Output: 60W+5W
Type-C1+Type-C2/USB2+USB1 Output: 45W+15W+5W
Type-C1+(Type-C2+USB2)+USB1 Output: 45W+15W+5W
Product Size: 97*41*38mm
Product Weight: About 353g
Cable Length: 1.65m(65 inch)

4. Package List

- Power Strip *1
- Charging Cable *1
- User Manual * 1
- Warranty Card *1

5. Temperatures

Ambient temperatures: non-tropical areas lower than 2000m above sea level.
Storage ambient temperatures: - 20 to 40 degrees Celsius.

6. Tips

Please read all instructions and warnings before using this product. Non-standard use will damage the product or personal safety.

- The total power of two-jack socket should not exceed the rated power of the product.
- It is forbidden to connect this product to two-jack socket.
- It is forbidden to wind the power cord to avoid overheating.
- Please keep this product away from children.
- Do not store the product in high temperature, strong light and strong magnetic field. Do not place it in other harsh environments such as fire source.
- Improper use of the product can easily cause damage to the product or may endanger personal and property safety.
- Consumer shall be liable for any personal and property damage resulted from their improper use against the user manual or ignoring the warning, to which our company will not bear any legal liability.
- Disintegration of this product by non-professionals is strictly prohibited.
- Use of DC appliances or loads in excess of the output current of this product shall be avoided (no output due to circuit protection).
- Intense physical actions including knocking, throwing, trampling on and squeezing, etc. shall be avoided.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Intertek
5014160



Warning: Please follow the above safety instructions otherwise it will cause fire, electric shock, damage or other damage.

Shenzhen Times Innovation Technology Co., Ltd.
Add: 5th Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtuo Community, Bantian Street, Longgang District, Shenzhen
Manufacturer: Dongguan Wontravel Electric Co., Ltd.
Add: No. 1 Yuanshanzai Road, Henggangtuo, Xinan district, ChangAn Town, DONGGUAN Guangdong Province China
Hotline: +86-4000-712-711 Website: www.baseus.com
PB3170Z/POA1
Designed by Baseus
Made in China