

4", 6" LED DISK SURFACE MOUNT + RECESSED CAN RETROFIT 3 CCT SELECTABLE LR23861, LR23863

WARNING: FOR YOUR SAFETY READ AND UNDERSTAND INSTRUCTIONS. CHECK LOCAL ELECTRICAL CODES BEFORE INSTALLING. TURN OFF ELECTRICITY AT THE FUSE OR CIRCUIT BREAKER BOX. MAKE SURE TO USE PROPER RATED WIRE.

FLUSH MOUNT INSTALLATION

Install two screws into junction box. Do not fully drive screws (FIG. 1)

Connect supply wires to wires in fixture wiring box using wiring nuts. Connect white to white, black to black, and green or bare copper wire to bare copper wire. (FIG. 2)

If there is a ground wire at junction box, secure it to ground screw.

Compress torsion springs and push disk light housing up into junction box. Using a Phillips screwdriver, attach the disk light housing tightly to the junction box (FIG. 3)

Press and twist the diffuser into housing, and twist to lock in place. (FIG. 4)

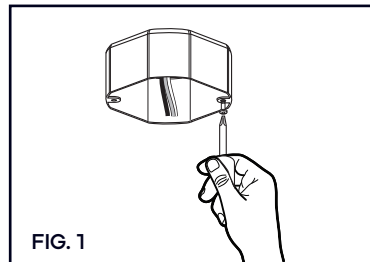


FIG. 1

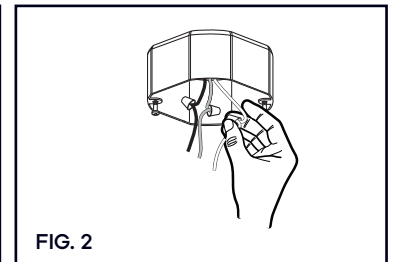


FIG. 2

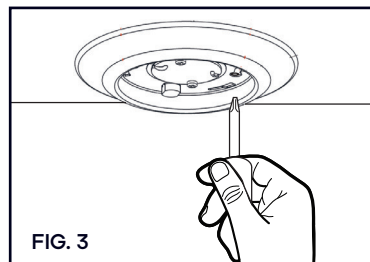


FIG. 3

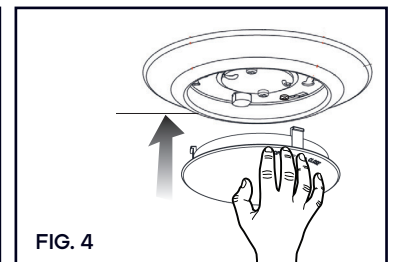



FIG. 4

RETROFIT INSTALLATION FOR 4" DISK

Install springs onto back of fixture housing using Phillips screwdriver (FIG. 5)

Screw Retrofit E26 socket adapter into existing bulb receptacle (FIG. 6)

Plug socket connector from disk light into socket connector from socket adapter. Install fixture by capturing springs in housing and firmly pushing up into ceiling (FIG. 7)

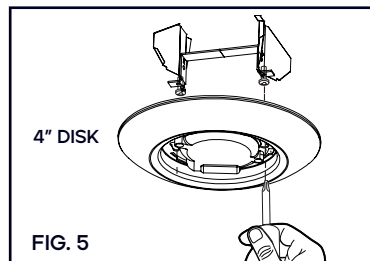

4" DISK

FIG. 5

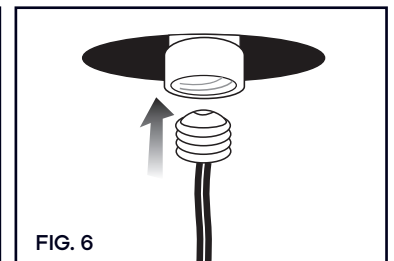


FIG. 6


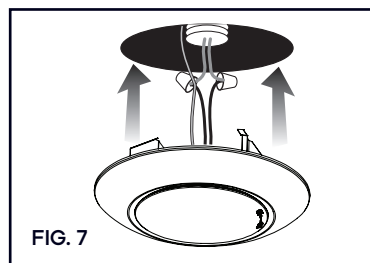


FIG. 7

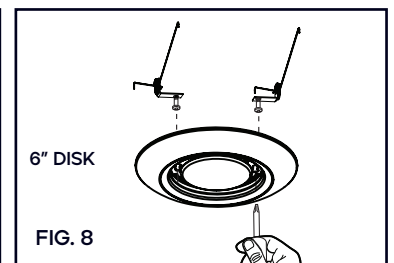

6" DISK

FIG. 8

RETROFIT INSTALLATION FOR 6" DISK

Install springs onto back of fixture housing using Phillips screwdriver (FIG. 8)

Screw Retrofit E26 socket adapter into existing bulb receptacle (FIG. 6)

Plug socket connector from disk light into socket connector from socket adapter. Install fixture by capturing springs in housing and firmly pushing up into ceiling (FIG. 9)

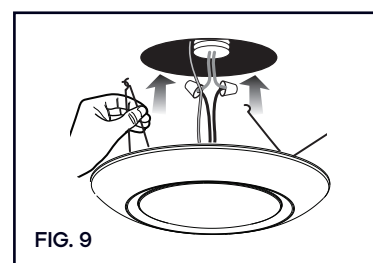


FIG. 9