

8' T8 BYPASS RETROFIT TUBE - 5 CCT SELECTABLE LR34138

NOTE: This product complies with Part 18 of the FCC rules but may cause interference to radios, tv's, wireless telephones and remote controls. If interference occurs, move the product away from those devices or plug it into a different outlet. Do not install this product near maritime safety communications equipment or other critical navigation or communication equipment operating between 0.45-30Mhz.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna, Increase the separation between the equipment and receiver, Connect the equipment into an outlet on a circuit from that to which the receiver is connected, Consult the dealer or an experienced radio/tv technician for help. This Class B digital apparatus complies with Canadian ICES-005.

The units covered by this report were intended to retrofit surface mount with diffuser for these models, Type IC or non-IC recessed mount listed fluorescent luminaires that use maximum two tubular lamps, the minimum lamp compartment dimensions are tabulated below:

| Model | MINIMUM LAMP COMPARTMENT DIMENSIONS [Length x Width x Height] | Lamp Quantity |
|---------|--|------------------|
| LR34138 | 95.3" X 4.3" X 2" (2420X110X50mm) | 2 |

PARTS/COMPONENTS INCLUDED IN KIT:

- INSTALLATION INSTRUCTIONS
- LED TUBE LAMP
- LUMINAIRE MARKING LABELS. Only for Type B installation, please apply the following lamp replacement label on the retrofit luminaire after the retrofit kit has been installed, where readily visible by the user during relamping, and after installation.

WARNINGS

To avoid personal injury and/or possible product damage, the following cautions must be followed:


- Read all safety information and instructions before installation.
- **RISK OF ELECTRIC SHOCK.** Disconnect power at fuse or circuit breaker before installing or servicing.
- To prevent damage to lamp, lamp MUST NOT be energized when color (CCT) selector switch is changed.
- Suitable for damp locations - Not for use where directly exposed to water.
- **CAUTION** - Only use the control provided with or specified by these instructions to control this lamp. This lamp will not operate properly when connected to a standard (incandescent) dimmer or dimming control.
- This device is not intended for use with emergency exits.
- To prevent early lamp failure, lamp should only be installed in operating environ-

ments ranging between: -4°F and 113°F (-20°C and 45°C)

- **WARNING - RISK OF FIRE OR ELECTRIC SHOCK.** LED Retrofit kit installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.
- **WARNING - RISK OF FIRE OR ELECTRIC SHOCK.** Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the input rating of the retrofit kit does not exceed the input rating of the luminaire.
- DO NOT make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- **WARNING** - To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- **WARNING** - To avoid potential fire or shock hazard, do not use this retrofit kit in luminaires employing shunted bi-pin lamp holders. Note: Shunted lamp holders are found only in fluorescent luminaires with instant-start ballasts. Instant start ballasts can be identified by the words "Instant Start" or "I.S." marked on the ballast. This designation may be in the form of a statement pertaining to the ballast itself, or may be combined with the marking for the lamps with which the ballast is intended to be used, for example F40T12/IS. For more information, contact the LED luminaire retrofit kit manufacturer. **ONLY SUITABLE FOR SINGLE-END POWERED LAMPS**
- Installers should not disconnect existing wires from lamp socket terminals to make new connections at lamp socket terminals. Instead, installer should cut existing lamp socket leads away from the lamp socket and make new electrical connections to lamp socket lead wires by employing connectors suitable for the application.
- THIS RETROFIT KIT IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY AUTHORITIES HAVING JURISDICTION. PRODUCT MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN IN ACCORDANCE WITH THE APPLICABLE AND APPROPRIATE ELECTRICAL CODES. THE INSTALLATION GUIDE DOES NOT SUPERSEDE LOCAL OR NATIONAL REGULATIONS FOR ELECTRICAL INSTALLATIONS.
- Examine all parts that are not intended to be replaced by the retrofit kit for damage and replace any damaged parts prior to installation of the retrofit kit.
- The luminaire, once modified as retrofit fixture, will no longer operate fluorescent lamps.
- For a linear tubular LED lamp conversion, there shall be text or a diagram showing how the supply connections were made to the lamp holders so the connect connections will be made to the lamp when the lamp is installed or replaced.

ASSEMBLY INSTRUCTIONS


1. Confirm the type of lamp holder of the fixture (FA8 or R17D).
2. Assemble end caps as shown in the picture below.
If the lamp holder is FA8, insert FA8 end caps to G13 pins, if it's R17D, insert R17D end caps.
3. Assembly is completed.



8' T8 BYPASS RETROFIT TUBE - 5 CCT SELECTABLE LR34138

INSTALLATION INSTRUCTIONS

1. DISCONNECT POWER OR LUMINAIRE

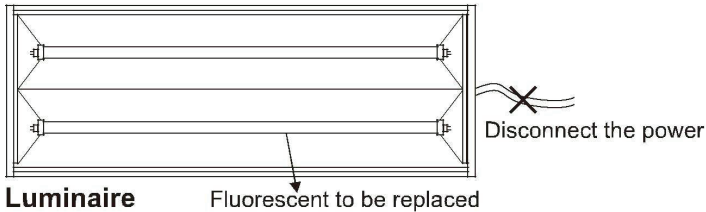

*Disconnect power to luminaire or circuit (if possible). Ensure all power is off by using a voltmeter or other method to confirm.

2. REMOVE EXISTING TUBE LAMP (S)


- Remove troffer lens, if present.
- Remove existing fluorescents.
- Remove ballast cover. (Cover may be secured with screws or tabs)

3. REWIRE THE FIXTURE

- Disconnect the wires before and after the ballast.
- Connect two wires to branch circuit L and N according to the below figure.



OR

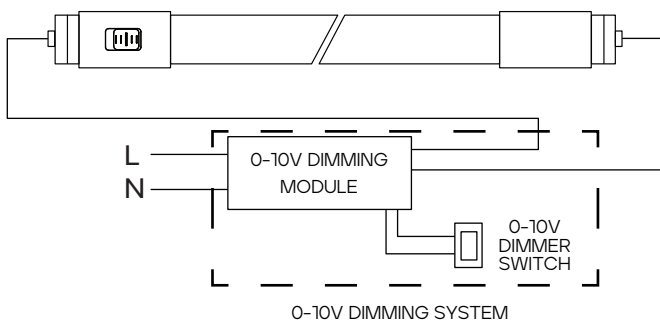


INPUT VOLTAGE: 120-277VAC 50/60Hz

*NOTE: Dimming module must be purchased for dimming. DO NOT dim without the proper module.

4. SELECT THE CCT

Select the desired color temperature using the CCT switch located on the base of the lamp.

- Using the color selector switch on the base, select the desired color temperature.
- To prevent damage to lamp, lamp must not be energized when color (CCT) selector switch is changed.

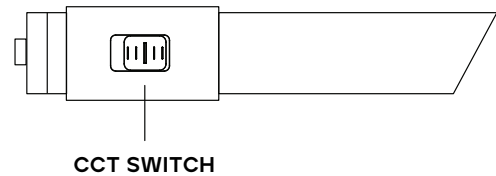

5. INSERT LED TUBES

- Read label on the LED tube to ensure the power end of LED is aligned with powered tube socket, then insert LED lamp in the normal way.
- LED lamps are now fully installed.
- Replace troffer lens, if present.
- After the modification is complete, attach the Replacement Marking and cautionary Label to a visible place on the luminaire and keep it visible after installation.

6. RESTORE THE POWER OF LUMINAIRE

Restore power to circuit, luminaire and test light. If necessary, adjust position of LED tube, and enjoy your new LED tube light.