




combinette | combi S

Manual desktop plastic comb punching and binding machine.
For all types of comb book production.



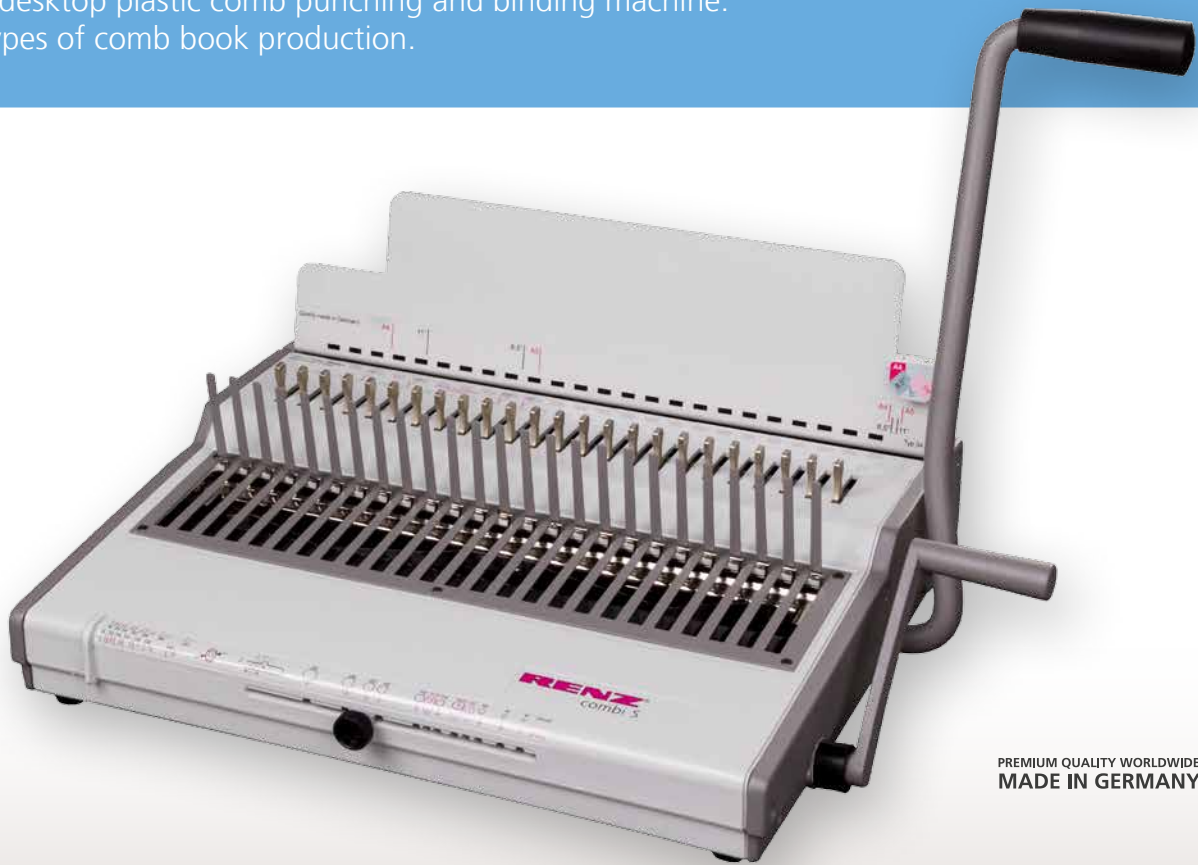


PREMIUM QUALITY WORLDWIDE
MADE IN GERMANY 

Illustrated: combi S



Customer benefits:

- Binds up to 480 sheets
- Closure control guarantees easy comb closure
- Gauge to alter margin for a stronger bind⁽¹⁾
- Special hardened punch pins for long lasting life
- Staggered punching pins for better punching
- QSA (Quick Size Adjustment)⁽¹⁾ for high flexibility of different paper formats: A5 and A4
- Adjustable side lay for perfect punching registration
- Easy to empty sliding waste tray
- Measures the document or comb size
- Heavy duty construction & compact design

Maximum:

-  Width **340 mm**
-  Punch up to **2.5 mm**
-  Bind up to **48 mm**

Output:

-  Max. punched sheets per hour **12,000**
-  Max. bound products per hour **200**



combinette
Entry-level office manual punching and binding machine designed for regular use in a small to medium sized office.



combi S
Manual punching and binding machine designed for regular use in a small to medium sized office.

All performance outputs are based on 80 gsm paper and may vary depending on the product type, the working environment and the operator. For best punching results we recommend a paper thickness of 1.5 - 2.0 mm.

⁽¹⁾ Not available for combinette.





Vertical punching makes it simple and easy to punch correctly every time.



QSA (Quick Size Adjustment) technology allows the punching pins to be cancelled and the paper formats to be changed quickly and easily.⁽¹⁾



The depth gauge feature allows the operator to adjust the punched hole margin from 2 mm to 4,5 mm⁽¹⁾. This adds strength to the bound edge.




It binds volumes up to 480 sheets.

The closure control guarantees quick and easy comb opening and closure.



US-pitch

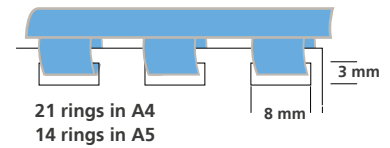

Technical data:	combinette	combi S
Punching capacity - sheets per hr:	12,000	12,000
Min. punching width:	10 mm	10 mm
Max. punching width:	300 mm	340 mm
Min. unpunched length:	50 mm	50 mm
Max. unpunched length:	500 mm	500 mm
Max. punching thickness:	2.5 mm	2.5 mm
Punching operation:	Manual	Manual
Punch pattern:	Oblong 8 x 3 mm	Oblong 8 x 3 mm
Pitch:	US	US
Selectable punch pins (QSA):	No	Yes
Variable margin depth:	No	Yes
Binding thickness:	1 - 48 mm	1 - 48 mm
Binding element Ø:	6 - 52 mm	6 - 52 mm
Min. binding width:	10 mm	10 mm
Max. binding width:	340 mm	340 mm
Binding operation:	Manual	Manual
No. of books output per hour:	200	200
Machine dimensions L x W x H:	360 x 490 x 90 mm	360 x 490 x 90 mm
Machine weight:	9.5 kg	10 kg
Machine packaging dimensions L x W x H:	620 x 480 x 345 mm	620 x 480 x 345 mm
Machine weight with packaging:	11.8 kg	11.9 kg
Power requirement:	-	-

Technical modifications may be made without notice.

1 mm = 10 sheets of paper, based on 80 gsm.

All performance outputs are based on 80 gsm paper and may vary depending on the product type, the working environment and the operator. For best punching results we recommend a paper thickness of 1.5 - 2.0 mm.

⁽¹⁾ Not available for combinette.

For further information and videos please visit: