



## eco C 360 | eco S 360

Fixed 2:1 pitch, manual desktop punching and RENZ RING WIRE® binding machines for all types of book and calendar<sup>(1)</sup> production. Designed to produce low to medium volumes of documents of all sizes quickly and easily.

# 2:1 ONE PITCH®



PREMIUM QUALITY WORLDWIDE  
MADE IN GERMANY

Illustrated: eco S 360

### Customer benefits:

- Binds up to 340 sheets
- Closure control guarantees easy ring wire closure for perfect presentations every time
- Gauge to alter margin for a stronger bind<sup>(1)</sup>
- Special hardened punch pins for long lasting life
- Staggered punching pins for better punching
- QSA (Quick Size Adjustment) for high flexibility of different paper formats: A5, A4 and A3<sup>(1)</sup>
- Adjustable side lay for perfect punching registration
- Easy to empty sliding waste tray
- Measures the document or ring wire size
- Parallel adjustment guarantees a perfect bind every time
- Heavy duty construction & compact design

### Maximum:

Width  
 **360 mm**

Punch up to  
 **2.5 mm**

Bind up to  
 **34 mm**

### Output:

 Max. punched sheets per hour  
**12,000**

 Max. bound products per hour  
**200**



### eco C 360

Entry-level office manual punching and binding machine designed for regular use in a small to medium sized office.



### eco S 360

Manual punching and binding machine designed for regular use in a small to medium sized office.

All performance outputs are based on 80 gsm paper and may vary depending on the product type, the working environment and the operator. For best punching results we recommend a paper thickness of 1.5 - 2.0 mm.

<sup>(1)</sup>Not available for eco C 360.





Vertical punching makes it quick and easy to punch correctly every time.




QSA (Quick Size Adjustment) technology means that punching pins can be cancelled and paper formats can be changed quickly and easily.<sup>(1)</sup>



Depth gauge feature allows the operator to adjust the punched hole margin from 2 mm to 4,5 mm<sup>(1)</sup>. This adds strength to the bound edge.



Binds up to 340 sheets. The closure control guarantees quick and exact wire closing.

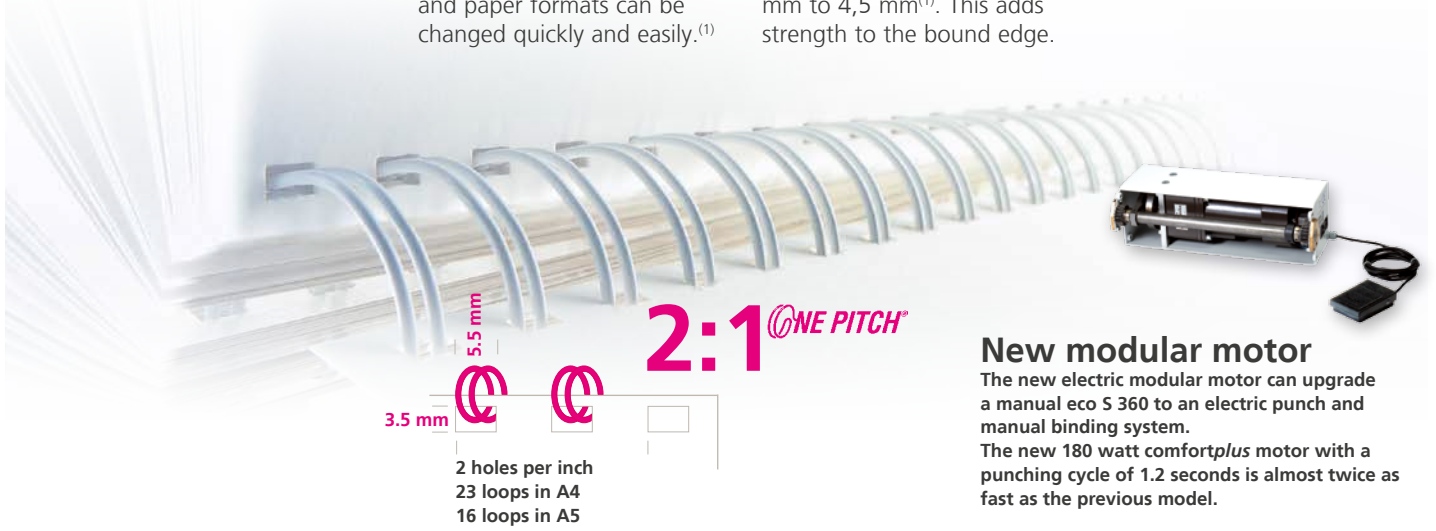

## New modular motor

The new electric modular motor can upgrade a manual eco S 360 to an electric punch and manual binding system.

The new 180 watt *comfortplus* motor with a punching cycle of 1.2 seconds is almost twice as fast as the previous model.

Technical data:	eco C 360	eco S 360	Modular motor
Punching capacity - sheets per hr:	12,000	12,000	-
Min. punching width:	10 mm	10 mm	-
Max. punching width:	300 mm	360 mm	-
Min. unpunched length:	50 mm	50 mm	-
Max. unpunched length:	500 mm	500 mm	-
Max. punching thickness:	2.5 mm	2.5 mm	-
Punching operation:	Manual	Manual	-
Punch pattern:	Oblong 5.5 x 3.5 mm	Oblong 5.5 x 3.5 mm	-
Pitch:	2:1	2:1	-
Selectable punch pins (QSA):	No	Yes	-
Variable margin depth:	No	Yes	-
Binding thickness:	1 - 34 mm	1 - 34 mm	-
Binding element Ø:	6,9 - 38 mm 1/4" - 1 1/2"	6,9 - 38 mm 1/4" - 1 1/2"	-
Min. binding width:	10 mm	10 mm	-
Max. binding width:	360 mm	360 mm	-
Binding operation:	Manual	Manual	-
No. of books output per hr:	200	200	-
No. of calendars output per hr:	-	160	-
Machine dimensions L x W x H:	330 x 560 x 180 mm	330 x 560 x 180 mm	160 x 420 x 160 mm
Machine weight:	13.5 kg	13 kg	13 kg
Machine packaging dimensions L x W x H:	620 x 480 x 345 mm	620 x 480 x 345 mm	620 x 480 x 345 mm
Machine weight with packaging:	16 kg	15.5 kg	15 kg
Power requirement:	-	-	230/250V / 50Hz / 180W 115/200V / 60Hz / 180W

Technical modifications may be made without notice.

1 mm = 10 sheets of paper, based on 80 gsm.

All performance outputs are based on 80 gsm paper and may vary depending on the product type, the working environment and the operator. For best punching results we recommend a paper thickness of 1.5 - 2.0 mm.

<sup>(1)</sup> Not available for eco C 360.

For further information and videos please visit: