


## EMERGENCY LED DRIVER 8-15W LR35120, LR35121



### FEATURES

- Meets most of safety standards for lighting
- Standard CSA C22.2 NO. 141, UL924
- External lithium battery
- Battery protection: Overcharge protection, over discharge protection, short circuit protection.
- Indicator shows a variety of working modes
- The batteries Meet 500 cycles of standard CH and standard DCH
- RoHS compliant
- Emergency 1.5 Hrs

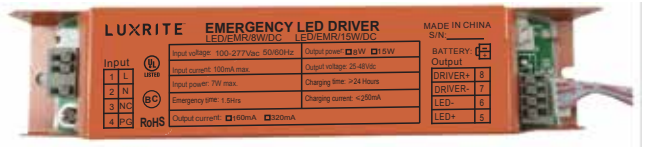


LED/EMR/8W/DC

LED/EMR/15W/DC

### SPECIFICATIONS

Universal Input Voltage	100-277VAC, 50/60Hz
AC Input Current	100mA max
AC Input Power Rating	7.0W max
Output Current and Voltage	160-320mA 25-48Vdc
Output Power	8W/15W
Emergency Time	≥ 90 mins
Full Warranty	5 Years
Test Switch Indicator Light	Illuminated Test Switch, indicator light
Battery	Li-ion battery 7.4V/2500mAH Li-ion battery 14.8V/2000mAH
Battery Charging Current	250mA
Recharge Time	≥ 24 Hours
Temperature Rating (Ambient)	Li-ion 0°C to 40°C (32°F to 104°F)
Dimensions	7.4"x1.5"x1.1" (188mmx38mmx29mm)

### WIRING

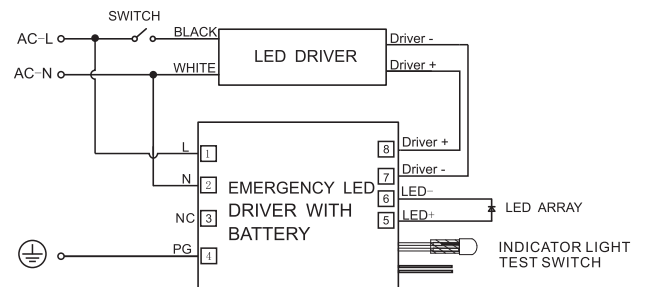


1. DO NOT MATE CONNECTOR UNTIL INSTALLATION IS COMPLETE AND AC POWER IS SUPPLIED.
2. TEST ACCESSORY LEADS-OBSERVE PROPER POLARITY WIRING.

### DIMENSIONS


Li-ion battery 14.8V/2000mAH

Case: 7.4" x 1.5" x 1.14"  
(Mounting center - 7.0")

Battery: 6.1" x 1.57"

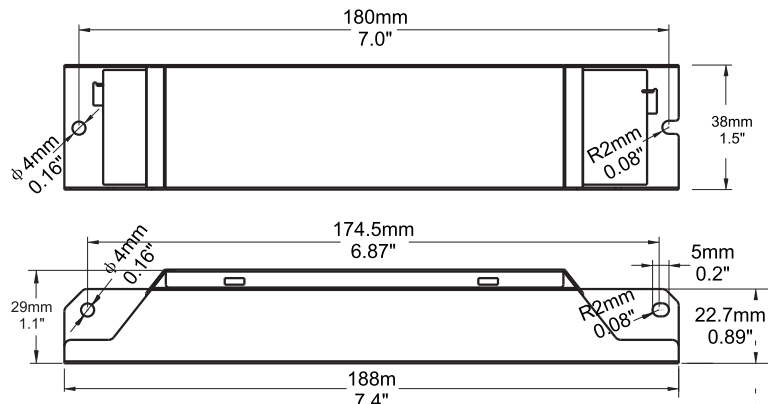

## DIMENSIONS

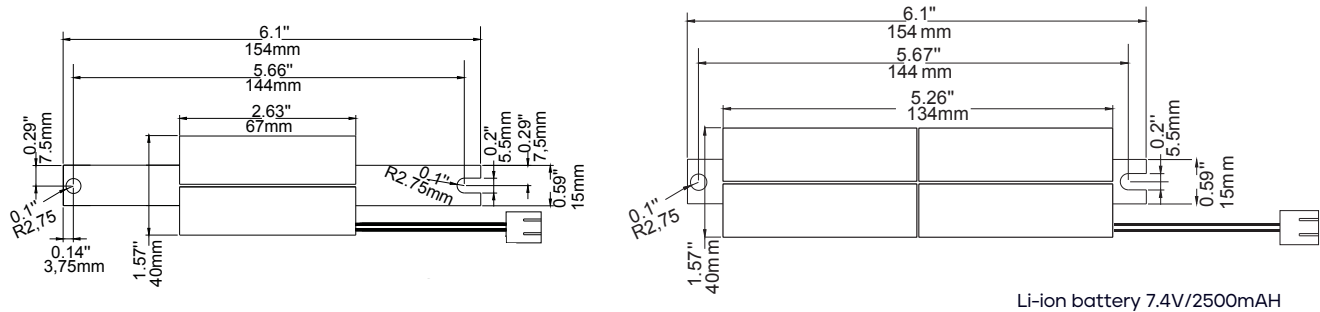

## IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

### READ AND FOLLOW ALL SAFETY INSTRUCTIONS

- **RISK OF FIRE OR ELECTRIC SHOCK** – Luminaire wiring and electrical parts may be damaged when drilling for installation of LED Emergency Backup. Check for enclosed wiring and components.
- **RISK OF FIRE OR ELECTRIC SHOCK** – This LED Emergency Backup installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.
- Before installing, make certain the AC power to the fixture is off.
- The electrical rating of this product is 100-277VAC. Installer must confirm that there is 100-277VAC the fixture before installation.
- To prevent electrical shock, only mate unit connector after installation is complete and before the AC power to the fixture is back on.
- Do not use outdoors.
- This LED Emergency Backup unit requires an un-switched AC power source of 100-277VAC, 50/60Hz. The AC driver must be on the same branch circuit as the LED Emergency Backup unit.
- Do not let power supply cords touch hot surfaces.
- Do not mount near gas or electric heaters.
- Do not connect battery pack connector until all other wiring is complete and AC power is on.
- The emergency LED driver is for use with grounded, UL Listed LED luminaires, it shall be enclosed by the LED luminaire and bonded to the grounding of LED luminaire.
- Verify that all replacement lamp types marked on the installed luminaire are also identified as suitable for use with this emergency battery pack.
- The battery pack is fixed by the screw and the indicator lamp is attached to the shell of the luminaire by 3M tape.
- Equipment should be mounted in locations and at heights where it is not subject to tampering by unauthorized personnel.
- The use of accessory equipment is not recommended by the manufacturer and may cause an unsafe condition.
- Do not use this equipment for other than its intended use.
- Use with grounded, UL listed, dry or damp location rated fixture.

### SAVE THESE INSTRUCTIONS

#### • APPLICATIONS

The BLD-AM15D-480600 emergency driver can be used with most LED loads that have a rated voltage of 25-48VDC. These emergency driver has been evaluated and found compliant to UL 924. The emergency pack assembly is accepted as a component of a luminaire where the suitability of the combination shall be determined by UL or Authorities Having Jurisdiction. The as-installed performance of the system must meet or exceed all Federal, State, and Local code requirements.

#### • OPERATION

**AC OPERATION** – AC power is present. The LED load from the LED driver is normal power supply, AC LED driver output current can not exceed 150W or 4A, the emergency driver is charging in a standby mode, the green LED light on to indicate that it is charging.

**EMERGENCY OPERATION** – When the AC power goes out, the emergency driver detects the AC power outage and automatically switch to the working emergency mode. The green LED light off. When the AC power is restored, the emergency driver backs to AC power working and starts re-charging, the green LED light is on.