

## 50W & 150W FLOOD LIGHT

### LR40350, LR40351, LR40355, LR40356, LR40357, LR40358

#### SAFETY INFORMATION

READ CAREFULLY BEFORE INSTALLING FIXTURE AND KEEP FOR FUTURE REFERENCE.

Fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.


**WARNING - MAKE SURE POWER IS OFF BEFORE INSTALLING OR MAINTAINING FIXTURE.**

INSTALLATION MUST BE CARRIED OUT BY A QUALIFIED ELECTRICIAN.

#### LR40350- 30W/40W/50W



#### LR40355 - 80W/100W/150W


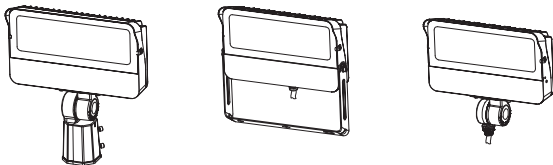


#### WIRING

TURN OFF THE POWER

Connect AC wire, black wire to L, white wire to N, and green wire to E. 1-10V dimmer connection (with dimmable driver)



1. Compatible with 0-10V Dimming
2. Connect wires as shown below, purple wire is D+, gray wire is D-.

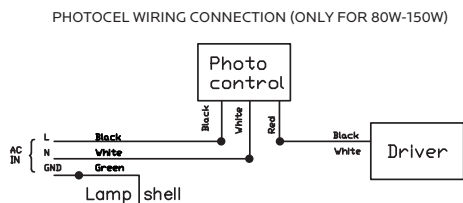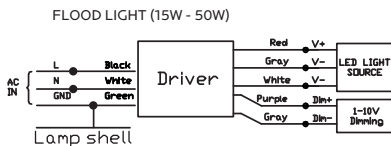


#### INSTALLATION

##### KNUCKLE


1. Use screw key to open the junction-box
2. Put the wires of lamp into the J-box




3. Screw up the knuckle mount into junction box




4. Use wire-nuts to connect the wires of lamp and J-box




5. Lock the junction box with screw key




6. Use hex-key to screw off the hex screw in knuckle mount




7. Adjust the lamp into suitable angle




7. Use hex-key to tighten up the screw




## KNUCKLE

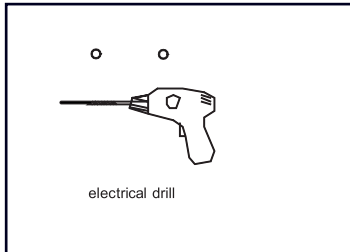


1. Mark the position of the fixing holes with fold light bracket, then drill fixingholes

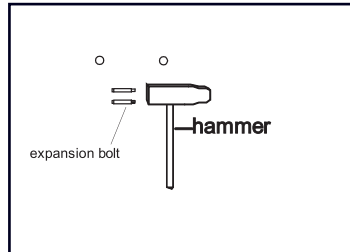


2. Drive in the bolts to the pre-drilled holes with thread outside, as shown below

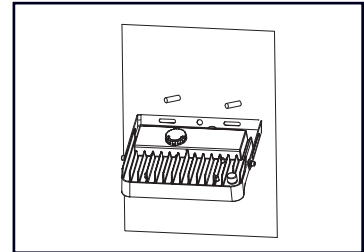


3. Make the bracket face tightly to the wall through the thread

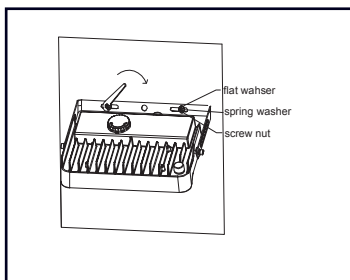

4. Fasten the screw nut clockwise with provided wrench

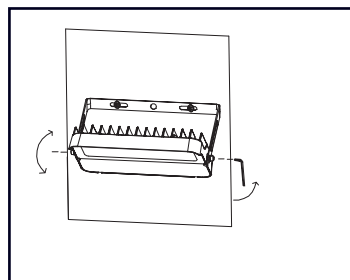


5. Rotate the light to the proper angle and fasten the screws

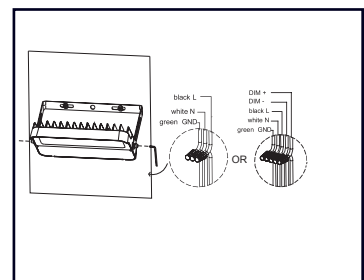


6. Fasten the screw both sides with allen driver


## SLIPFITTER




1. Loosen the 4 screws on the lamp holder, connect the wires correctly and put the wires into the lamp pole



2. Tighten the screws to secure the lamp on the lamp pole



3. Adjust the lamp into desired angle




4. Use hex-key to screw up the hex-screw.

NOTE: Locking bolt can be only compatible with a lamp pole with an outer diameter of 60. Adjustable angle is 0-90°

## CCT SWITCH

Select desired color temperature and slide switch.

### LR40350



### LR40355

