





MODEL: ONI S WIRELESS

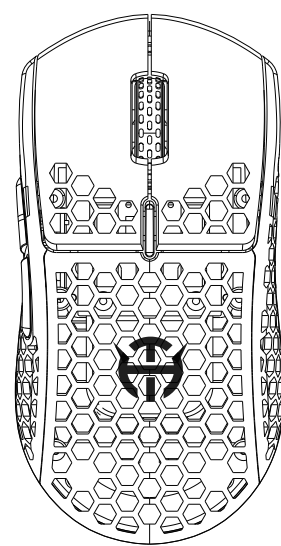

### Function layout

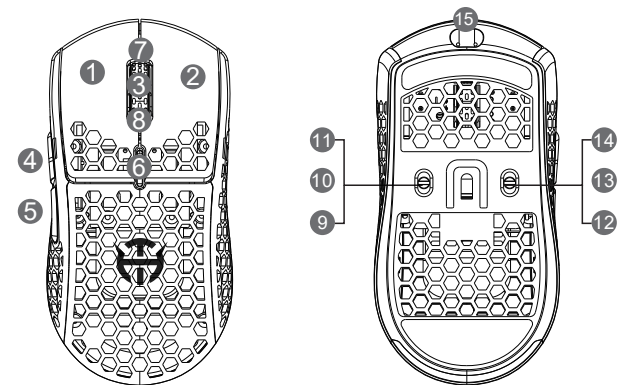

- |                |                        |                     |
|----------------|------------------------|---------------------|
| 1 Left click   | 7 Scroll up            | 13 RGB Off          |
| 2 Right click  | 8 Scroll down          | 14 Power Off        |
| 3 Middle click | 9 Polling rate:125Hz   | 15 USB-C Connection |
| 4 Forward      | 10 Polling rate:500Hz  |                     |
| 5 Backward     | 11 Polling rate:1000Hz |                     |
| 6 DPI          | 12 RGB On              |                     |

### Instruction

**Mouse instruction:**  
1. Remove the USB nano receiver located inside the Oni S Wireless.  
2. Plug the nano receiver into your PC's USB port.  
3. Turn on the power switch located on the bottom of the mouse.  
4. Allow for the installation to finish.

**DPI setting and indication:**  
1. DPI levels: 400-800-1600-2400-3200-6400.  
2. To scroll through the DPI levels, press the DPI button on the top of the mouse.

3. The scroll wheel LED color indicates the DPI levels in the sequence below:  
400 DPI: Red; 800 DPI (default): Blue; 1600 DPI: Green; 2400 DPI: Yellow; 3200 DPI: Cyan;  
6400 DPI: Purple.

Note:  
1) The DPI levels can be configured with our software. The default polling rate is 1000 Hz.  
2) The DPI LED effects can be configured with our software.

**Polling rate:**  
The polling rate is set by default: 125-500-1000 Hz. The bottom switch allows you to toggle it.

**Power switch function:**  
1. "RGB off" switch position: turns on the mouse, but does not activate the RGB LED.  
2. "Power off" switch position: turns off the mouse.  
3. "RGB on" switch position: turns on the mouse and RGB LED.

**Wired and wireless function:**  
1. The Oni S Wireless automatically switches between wired and wireless mode even with the USB nano receiver plugged in the PC.

2. The Oni S Wireless will automatically switch to wired mode when the USB-C cable is plugged into the mouse.

#### Low power and charging indication

- Low power indication: when the battery power is low (< 3.5V), the Oni S Wireless will flash red.
- When the Oni S Wireless is charging, it will flash yellow. Once it is fully charged, it will flash green and stop charging automatically.

#### Pairing

- Use the pairing software to pair the USB nano receiver and the Oni S Wireless if you replace your receiver or the connection cannot be established.

\*Note: If you wish to customize the Oni S Wireless further, please download our software at [www.tryhrd.shop](http://www.tryhrd.shop).

#### CAUTION

- Keep the battery in a dry environment.
- Avoid contact with the battery terminal and metallic objects.
- Do not short-circuit the mouse and avoid metallic objects or water.
- Charge your mouse ONLY with a computer and our USB-C cable.

### Main Specification

Size:	125x63.5x40mm
Weight:	75±2g
Switch:	Kailh GM 8.0
Sensor:	PAW3370
Max DPI:	19000
Default DPI:	400-800-1600-2400-3200-6400DPI
IPS:	400ips
Acceleration:	50g(Max)
LOD:	1mm and 2mm
Polling rate:	125-500-1000Hz
Interface:	USB 2.0
Battery type:	Li-ion Polymer Battery
Battery capacity:	500mAh
Charging time:	Around 2.5h