


# Multix

VORTEX

## 巨集指令說明 Macro Instruction

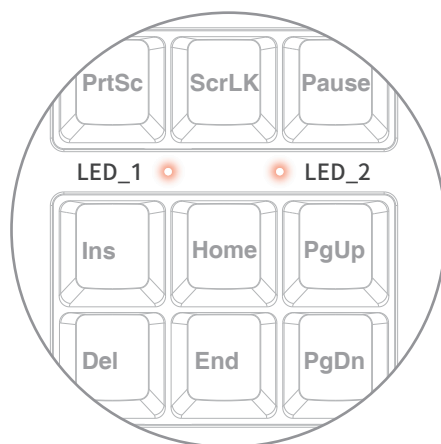

### 1. 選擇Layer ( Select a Layer ) :



按Fn + Scroll lock或Fn + Pause 選擇Layer  
( Layer 1→LED\_2閃爍綠燈2秒, Layer 2→LED\_2閃爍藍燈2秒 )

Press Fn + Scroll lock or Fn + Pause to select a Layer

( Layer 1→LED\_2 flashes Green LED normally for 2 seconds, Layer 2→LED\_2 flashes Blue LED normally for 2 seconds )

### 2. 進入編程模式 ( Enter into Macro mode ) :



按Fn + Alt\_R + Tab (Mac O.S下為Fn + CMD\_R + Tab) 進入編程模式

在Layer 1，LED\_1跟LED\_2 為綠燈快速閃爍；在Layer 2，LED\_1跟LED\_2為藍燈快速閃爍(對應Layer層顏色)

Press Fn + Alt\_R + Tab (Fn + CMD\_R + Tab in Mac O.S ) enter into Macro mode

In Layer 1, LED\_1 and LED\_2 flash rapidly in Green LED. In Layer 2, LED\_1 and LED\_2 flash rapidly in Blue LED  
( Coordinate with the color of the Layer )

### 3. 選擇要編程的鍵(例如: A或Fn + A)，此時LED\_1跟LED\_2綠或藍燈恆亮(對應Layer層顏色)，輸入鍵值 (例如:123) 後按Fn + Alt\_L確認，此時LED\_1跟LED\_2綠或藍燈恢復快速閃爍。(對應Layer層顏色)

Choose a key ( i.e: “ A “or Fn + A ), LED\_1 and LED\_2 light on steady Green or Blue ( Coordinate with the color of the Layer ), type the contents ( i.e:123 ) then press Fn + Alt\_L to confirm. LED\_1 and LED\_2 back to rapidly flashing.  
( coordinate with the color of the Layer )

### 4. 按Fn + Alt\_R + Tab離開編程模式→LED\_1跟LED\_2綠或藍燈關閉 ( 對應Layer層顏色 )

Press Fn + Alt\_R + Tab to exit Macro mode →LED\_1 and LED\_2 off ( Coordinate with the color of the Layer )

### 5. 每鍵最多儲存 32字元

Each key can memory up to 32 bytes

### 6. 變換Fn鍵位置 ( Switch Fn position ) :



按Fn + Alt\_L + Shift\_L三秒後LED\_1跟LED\_2閃爍紫色，直接選擇新的位置即完成變換。  
LED\_1跟LED\_2停止閃爍回復原狀態，原Fn鍵與變換鍵互換。

Press Fn + Alt\_L + Shift\_L for 3 seconds, LED\_1 and LED\_2 flash in purple, select a new key to complete the setting.  
LED\_1 and LED\_2 stop flashing and back to their original status.