

Octal bus transceiver/register; 3-state

74HC/HCT652

FEATURES

- Multiplexed real-time and stored data
- Independent register for A and B buses
- Independent enables for A and B buses
- 3-state
- Output capability: Bus driver
- Low power consumption by CMOS technology
- I_{CC} category: MSI.

APPLICATIONS

- Bus interfaces.

DESCRIPTION

The 74HC/HCT652 are high-speed SI-gate CMOS devices and are pin compatible with Low power Schottky TTL (LSTTL). They are specified in compliance with Jedec standard no. 7A.

The 74HC/HCT652 consist of 8 non-inverting bus transceiver circuits with 3-state outputs, D-type flip-flops and central circuitry arranged for multiplexed transmission of data directly from the data bus or from the internal storage registers. Data on the "A" or "B" or both buses, will be stored in the internal registers, at the appropriate clock pins (CP_{AB} or CP_{BA}) regardless of the select pins (S_{AB} and S_{BA}) or output enable (OE_{AB} and OE_{BA}) control pins. Depending on the select inputs S_{AB} and S_{BA} data can directly go from input to output (real time mode) or data can be controlled by the clock (storage mode), this is when the output enable pins this operating mode permits. The output enable pins OE_{AB} and OE_{BA} determine the operation mode of the transceiver. When OE_{AB} is LOW, no data transmission from A_n to B_n is possible and when OE_{BA} is HIGH, there is no data transmission from B_n to A_n possible. When S_{AB} and S_{BA} are in the real time transfer mode, it is also possible to store data without using the internal

QUICK REFERENCE DATA

GND = 0 V; T_{amb} = 25°C; t_r = t_f = 6 ns; V_{CC} = 4.5 V; C_L = 50 pF.

SYMBOL	PARAMETER	CONDITIONS	TYPICAL		UNIT
			HC	HCT	
t _{PLH} /t _{PHL}	propagation delay A _n /B _n to B _n /A _n	C _L = 15 pF V _{CC} = 5 V	13	13	ns
	propagation delay CP _{AB} /CP _{BA} to B _n /A _n		18	20	ns
	propagation delay S _{AB} /S _{BA} to B _n /A _n		20	23	ns
t _{PZH} /t _{PZL}	3-state output enable time OE _{AB} /OE _{BA} to B _n /A _n		14	15	ns
t _{PHZ} /t _{PLZ}	3-state output disable time OE _{AB} /OE _{BA} to B _n /A _n		12	13	ns
f _{max}	maximum clock frequency		92	92	MHz
C _I	input capacitance		3.5	3.5	pF
C _{PD}	power dissipation capacitance per channel	notes 1 and 2	26	28	pF

Notes

1. C_{PD} is used to determine the dynamic power dissipation (P_D in μW):

$$P_D = C_{PD} \times V_{CC}^2 \times f_i + \Sigma (C_L \times V_{CC}^2 \times f_o)$$
 where:
 f_i = input frequency in MHz; C_L = output load capacitance in pF;
 f_o = output frequency in MHz; V_{CC} = supply voltage in V;
 $\Sigma (C_L \times V_{CC}^2 \times f_o)$ = sum of the outputs.
2. For HC the condition is V_i = GND to V_{CC}
 For HCT the condition is V_i = GND to V_{CC} - 1.5 V

ORDERING AND PACKAGE INFORMATION

TYPE NUMBER	PACKAGE			
	PINS	PIN POSITION	MATERIAL	CODE
74HC/HCT652N	24	DIL	plastic	SOT101L
74HC/HCT652D	24	SO	plastic	SOT137A




Octal bus transceiver/register; 3-state

74HC/HCT652

D-type flip-flops by simultaneously enabling $\overline{OE}_{AB}$ and $\overline{OE}_{BA}$. In this configuration each output reinforces its input. Thus when all other data sources to the two sets of bus lines are at high-impedance, each set of the bus lines will remain at its last state. This type differs from the HC/HCT646 in one extra bus-management function. This is the possibility to transfer stored "A" data to the "B" bus and transfer stored "B" data to the "A" bus at the same time. The examples at the application information demonstrate all bus management functions. Schmitt-trigger action in the clock inputs makes the circuit highly tolerant to slower clock rise and fall times.

PINNING

SYMBOL	PIN	DESCRIPTION
CP_{AB}	1	A to B clock input
S_{AB}	2	select A to B source input
$\overline{OE}_{AB}$	3	output enable A to B input
$A_0..A_7$	4..11	A data inputs/outputs
GND	12	ground (0 V)
$B_7..B_0$	13..20	B data inputs/outputs
$\overline{OE}_{BA}$	21	output enable B to A input
S_{BA}	22	select B to A source input
CP_{BA}	23	B to A clock input
V_{CC}	24	positive supply voltage

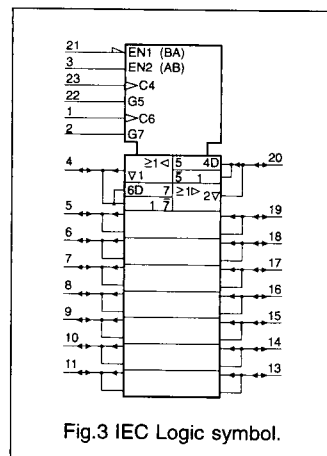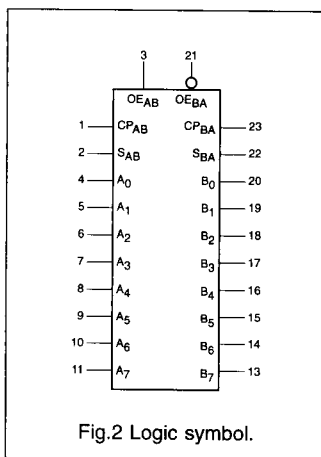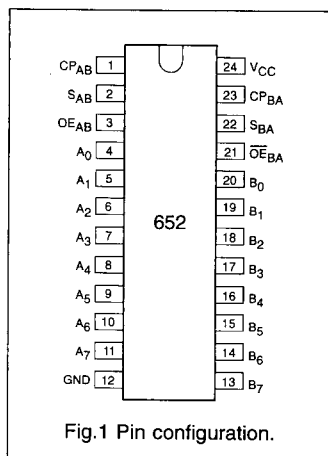

Octal bus transceiver/register; 3-state

74HC/HCT652

FUNCTION TABLE

INPUTS						DATA I/O *		OPERATION OR FUNCTION
OE _{AB}	OE _{BA}	CP _{AB}	CP _{BA}	S _{AB}	S _{BA}	A ₁ THRU A ₈	B ₁ THRU B ₈	HC/HCT652
L	H	H or L	H or L	X	X	Input	Input	Isolation
L	H	↑	↑	X	X			Store A and B data
X	H	↑	H or L	X	X	Input	Not specified	Store A, Hold B
H	H	↑	↑	L	X	Input	Output	Store A in both registers
L	X	H or L	↑	X	X	Not specified	Input	Hold A, Store B
L	L	↑	↑	X	L	Output	Input	Store B in both registers
L	L	X	X	X	L	Output	Input	Real Time B Data to A Bus
L	L	X	H or L	X	H			Stored B Data to A Bus
H	H	X	X	L	X	Input	Output	Real Time A Data to B Bus
H	H	H or L	X	H	X			Stored A Data to B Bus
H	L	H or L	H or L	H	H	Output	Output	Stored A Data to B Bus and Stored B Data to A Bus

* The data output functions may be enabled or disabled by various signals at OE_{AB} and OE_{BA} inputs. Data input functions are always enabled, i.e., data at the bus inputs will be stored on every LOW-to-HIGH transition on the clock inputs.

H = HIGH voltage level

L = LOW voltage level

X = don't care

↑ = LOW-to-HIGH level transition


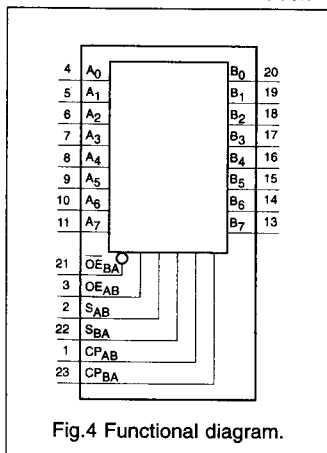


Fig.4 Functional diagram.

Octal bus transceiver/register; 3-state

74HC/HCT652

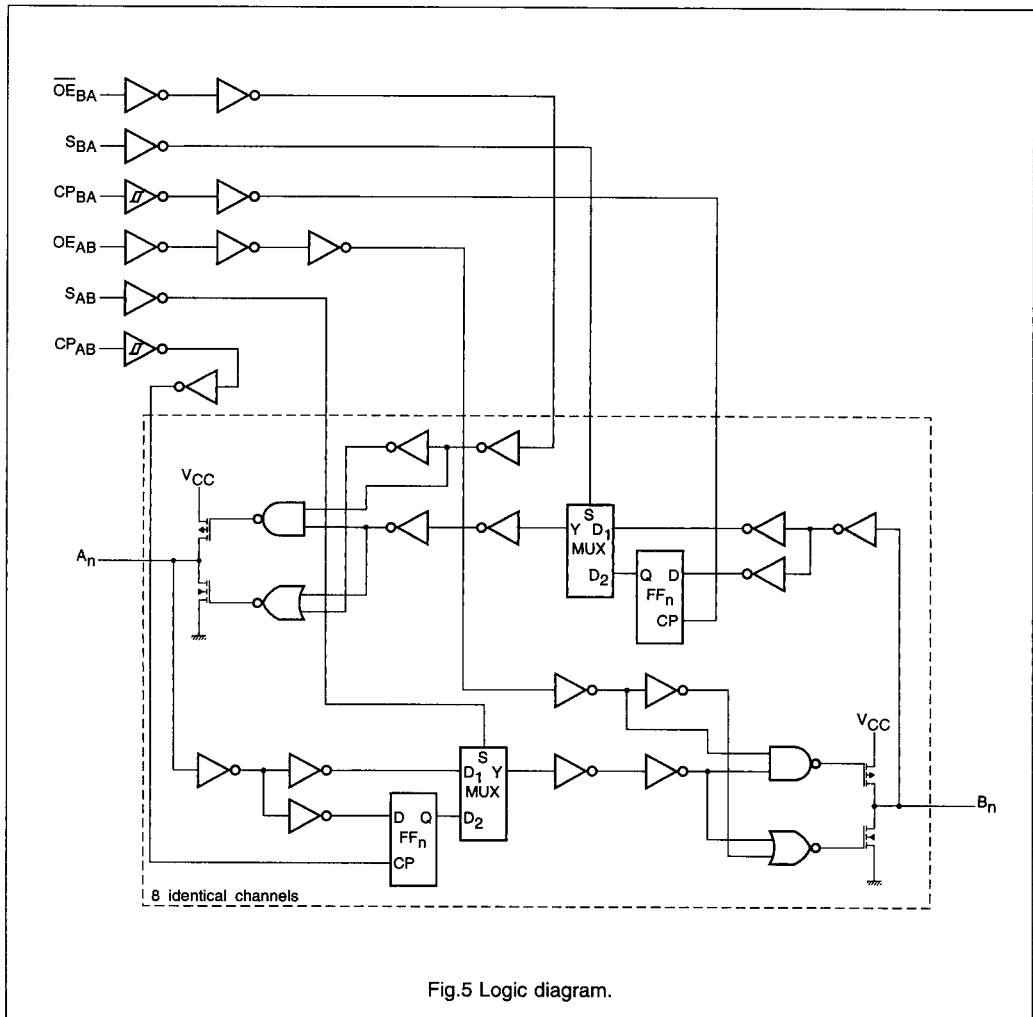

Octal bus transceiver/register; 3-state

74HC/HCT652

DC CHARACTERISTICS FOR 74HC

For the DC characteristics see chapter "HCMOS family characteristics", section "Family specifications".

Output capability: bus driver

I_{CC} category: MSI.

AC CHARACTERISTICS FOR 74HC

$GND = 0\text{ V}$; $t_r = t_f = 6\text{ ns}$; $C_L = 50\text{ pF}$.

SYMBOL	PARAMETER	T _{amb} (°C)							UNIT	TEST CONDITIONS	
		+25			-40 to +85		-40 to +125			V _{cc} (V)	WAVEFORMS
		MIN.	TYP.	MAX.	MIN.	MAX.	MIN.	MAX.			
t _{PHL} /t _{PLH}	propagation delay A _n , B _n to B _n , A _n	–	44	135	–	170	–	205	ns	2.0	Fig.6
		–	16	27	–	34	–	41		4.5	
		–	13	23	–	29	–	35		6.0	
t _{PHL} /t _{PLH}	propagation delay CP _{AB} , CP _{BA} to B _n , A _n	–	61	190	–	240	–	285	ns	2.0	Fig.7
		–	22	38	–	48	–	57		4.5	
		–	18	32	–	41	–	48		6.0	
t _{PHL} /t _{PLH}	propagation delay S _{AB} , S _{BA} to B _n , A _n	–	63	195	–	245	–	295	ns	2.0	Fig.8
		–	23	39	–	49	–	59		4.5	
		–	18	33	–	42	–	50		6.0	
t _{PZH} /t _{PZL}	3-state output enable time OE _{AB} , OE _{BA} to A _n , B _n	–	47	150	–	190	–	225	ns	2.0	Fig.9
		–	17	30	–	38	–	45		4.5	
		–	14	26	–	33	–	38		6.0	
t _{PHZ} /t _{PLZ}	3-state output disable time OE _{AB} , OE _{BA} to A _n , B _n	–	41	150	–	190	–	225	ns	2.0	Fig.9
		–	15	30	–	38	–	45		4.5	
		–	12	26	–	33	–	38		6.0	
t _{THL} /t _{TLH}	output transition time	–	14	60	–	75	–	90	ns	2.0	Figs 6, 8
		–	5	12	–	15	–	18		4.5	
		–	4	10	–	13	–	15		6.0	
t _w	clock pulse width HIGH or LOW CP _{AB} or CP _{BA}	80	17	–	100	–	120	–	ns	2.0	Fig.7
		16	6	–	20	–	24	–		4.5	
		14	5	–	17	–	20	–		6.0	
t _{su}	set-up time A _n , B _n to CP _{AB} , CP _{BA}	100	17	–	125	–	150	–	ns	2.0	Fig.7
		20	6	–	25	–	30	–		4.5	
		17	5	–	21	–	26	–		6.0	
t _h	hold time A _n , B _n to CP _{AB} , CP _{BA}	25	–8	–	30	–	35	–	ns	2.0	Fig.7
		5	–3	–	6	–	7	–		4.5	
		4	–2	–	5	–	6	–		6.0	
f _{max}	maximum clock pulse frequency	6.0	16	–	4.8	–	4.0	–	MHz	2.0	Fig.7
		30	83	–	24	–	20	–		4.5	
		35	98	–	28	–	24	–		6.0	

Octal bus transceiver/register; 3-state

74HC/HCT652

DC CHARACTERISTICS FOR 74HCT

For the DC characteristics see chapter "HCMOS family characteristics", section "Family specifications".

Output capability: bus driver

I_{CC} category: MSI.

Note to the HCT types

The value of additional quiescent supply current (ΔI_{CC}) for a unit load of 1 is given in the family specifications. To determine ΔI_{CC} per input, multiply this value by the unit load coefficient shown in the table below.

INPUT	UNIT LOAD COEFFICIENT
S_{AB}, S_{BA}	0.75
A_0 to A_7 and B_0 to B_7	0.75
CP_{AB}, CP_{BA}	1.50
OE_{AB}	1.50
$\overline{OE}_{BA}$	1.50

AC CHARACTERISTICS FOR 74HCT

$GND = 0\text{ V}$; $t_r = t_f = 6\text{ ns}$; $C_L = 50\text{ pF}$.

SYMBOL	PARAMETER	T _{amb} (°C)								UNIT	TEST CONDITIONS	
		+25			-40 to +85		-40 to +125				V _{cc} (V)	WAVEFORMS
		MIN.	TYP.	MAX.	MIN.	MAX.	MIN.	MAX.				
t _{PHL} /t _{PLH}	propagation delay A _n , B _n to B _n , A _n	–	16	27	–	34	–	41	ns	4.5	Fig.6	
t _{PHL} /t _{PLH}	propagation delay CP _{AB} , CP _{BA} to B _n , A _n	–	23	39	–	49	–	59	ns	4.5	Fig.7	
t _{PHL} /t _{PLH}	propagation delay S _{AB} , S _{BA} to B _n , A _n	–	27	46	–	55	–	66	ns	4.5	Fig.8	
t _{PZH} /t _{PZL}	3-state output enable time OE _{AB} , OE _{BA} to A _n , B _n	–	18	33	–	41	–	50	ns	4.5	Fig.9	
t _{PHZ} /t _{PLZ}	3-state output disable time OE _{AB} , OE _{BA} to A _n , B _n	–	16	35	–	44	–	53	ns	4.5	Fig.9	
t _{THL} /t _{TLH}	output transition time	–	5	12	–	15	–	18	ns	4.5	Fig.6, 8	
t _w –	clock pulse width HIGH or LOW CP _{AB} or CP _{BA}	16	6	–	20	–	24	–	ns	4.5	Fig.7	
t _{su}	set-up time A _n , B _n to CP _{AB} , CP _{BA}	10	5	–	13	–	15	–	ns	4.5	Fig.7	
t _h	hold time A _n , B _n to CP _{AB} , CP _{BA}	5	–2	–	6	–	8	–	ns	4.5	Fig.7	
f _{max}	maximum clock pulse frequency	30	83	–	24	–	20	–	MHz	4.5	Fig.7	

Octal bus transceiver/register; 3-state

74HC/HCT652

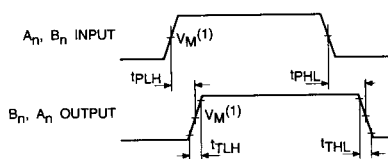


Fig.6 Waveforms showing the input A_n , B_n to output B_n , A_n propagation delay times and the output transition times.

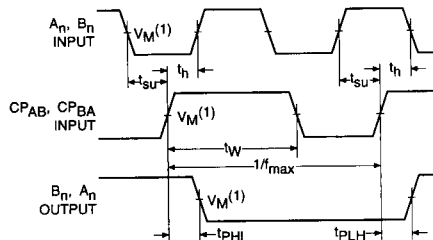


Fig.7 Waveforms showing the A_n , B_n to CP_{AB} , CP_{BA} set-up and hold times, clock CP_{AB} , CP_{BA} pulse width, maximum clock pulse frequency and the CP_{AB} , CP_{BA} to output B_n , A_n propagation delays.

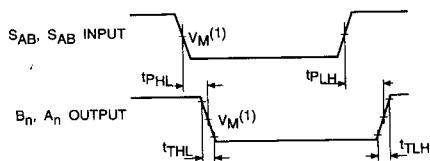


Fig.8 Waveforms showing the input S_{AB} , S_{BA} to output B_n , A_n propagation delay times and the output transition times.

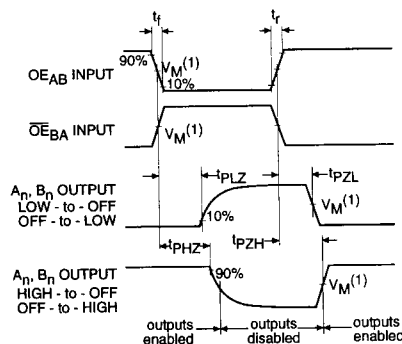


Fig.9 Waveforms showing the output enable inputs (OE_{AB} , OE_{BA}) to outputs A_n , B_n enable and disable times and the input rise and fall times.







Note to the AC waveforms

- (1) HC: $V_M = 50\%$; $V_I = \text{GND to } V_{CC}$.
HCT: $V_M = 1.3 \text{ V}$; $V_I = \text{GND to } 3 \text{ V}$.

Octal bus transceiver/register; 3-state

74HC/HCT652

APPLICATION INFORMATION

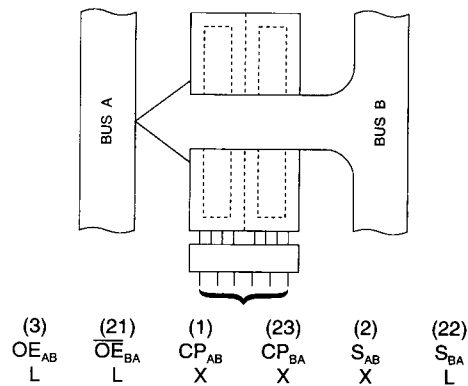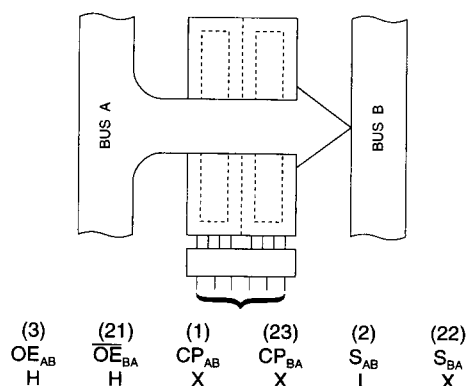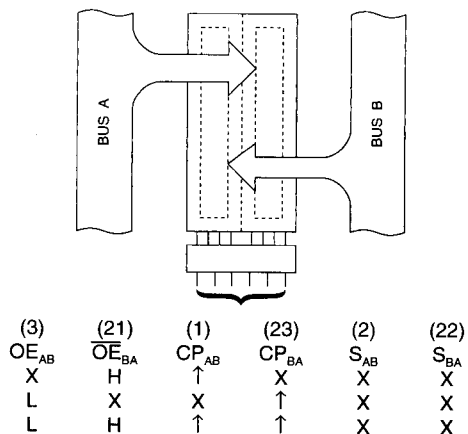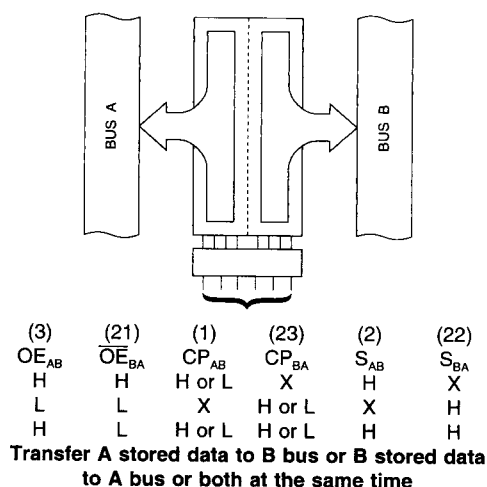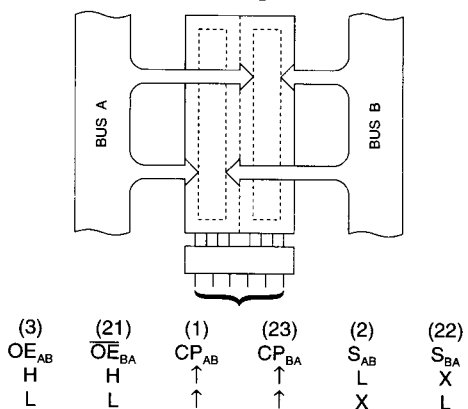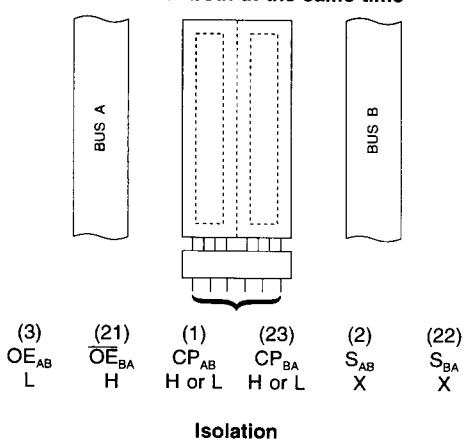Real-time transfer
bus B to bus AReal-time transfer
bus A to bus BStore A, B or A and B
in one registerTransfer A stored data to B bus or B stored data
to A bus or both at the same timeStore bus A in both registers or
store bus B in both registers

Isolation