




User Manual

600W Portable Power Station
Emergency Power Source

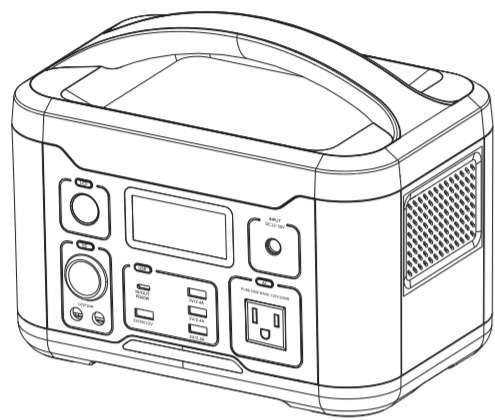

Model: DISCOVERY P600

Preface

Thank you for purchasing GOOLOO P600 portable power station. To make sure your personal safety, property security and user experience, please read this manual carefully before operating, and retain it for the future reference. If you still have questions after reading this manual, please email us at: contact@gooloo.com

Charge it first!

Before reading through the manual, you can begin to charge up your P600 by connecting it to the AC Adapter provided.

Please use the charger provided to charge the P600!




us.gooloo.com

Scan to get more information about GOOLOO products

1

Product Overview

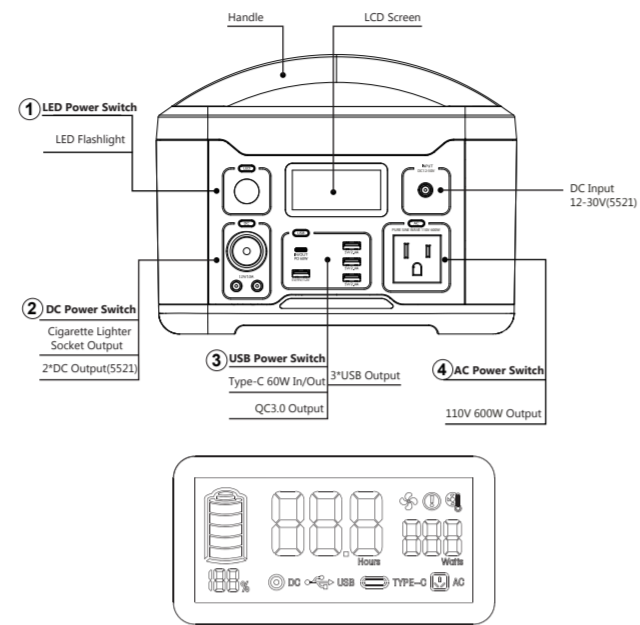

LCD Screen

The LCD display will be on when you press any power switch, it will display charge and discharge. When you use this unit, it will display the **Battery Power**, **Available Time (Hours)**, **Power Consumption (Watts)**.

The current battery power, it is displayed as a percentage (%).

Available time at the current power.

2

- DC** Press the [DC] button to turn on the DC output function.
- USB** Press the [USB] button to turn on the USB output function.
- TYPE-C** Press the [USB] button and use a type-c to type-c cable to charge other devices, the type-c function icons will appear on the LCD screen.
- AD** Press the [AC] button to turn on the AC output function.
- When the operating temperature reaches 131°F, the fan starts up. When you press the [AC] button, the fan will start up for a short period of time to check the fan.
- Overload warning.**
- Temperature warning of Inverter, temperature range 194°F~203°F.

LED Flashlight

Press the [LED] button and the LCD display will be on, press the button one more time to turn on the LED light. There are 4 modes of LED light appear in order (Weak light, Strong light, SOS, OFF) if you press slightly.

DC Input(12-30V)

- Support AC Adapter Charging.
- Support Solar Panel Charging (DC12-30V, Solar Panel Not Included).
- Support Car Charger Charging.

Power Switch ①②③④ : Press the power switch to turn on the corresponding output function and press the power switch one more time to turn it off, please turn off the corresponding functions (LED/USB/DC/AC) to save power after using.


SPECIFICATIONS

Capacity	17400mAh(626.4Wh)	DC Input	24V/3.75A 100W (Support 12-30V)
DC Output	12V/10A (Cigarette Lighter Socket+2 x DC Output Total 120W)		
AC Output	Pure Sine Wave 110V/60Hz, 600W Continuous, Peak 1000W	USB Output	5V/2.4A*3 QC3.0*1

3

Type-C Input/Output	PD60W (20V/3A,15V/3A, 12V/3A,9V/3A,5V/3A)	Weight	N.W : 5.4Kg
Battery	Lithium Ion (18650)	Dimensions	10.20×6.73×7.91inch
Management System	Temperature Protection Over Charge Protection Short-Circuit Protection Over-Current Protection Over-Discharge Protection	Operating Temperature	14°F~113°F
Lifecycles	1000 Cycles	Recharging Temperature	32°F~113°F
Warranty	12 + 6 Months	LED Flashlight	3W LED
		Certifications	FCC/CE/PSE/RoHS/UL

WHAT'S IN THE BOX

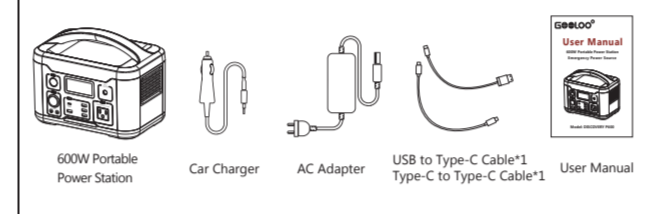

Support Charging Device

USB Output Port: Smart phones, Tablets, Smart watches, Digital Cameras, e-readers, etc.
12V Cigarette Lighter Socket: Car air pump, Car vacuum cleaners, Car refrigerators, etc.
DC Output Port: Drones, Routers, etc. use 12V as the power supply device.
AC Output Port: Laptops, Displays, Home appliances, etc.
Type-C Port: Support PD60W max input/output, power for laptops and smart phone, etc devices with type-c port.

4

AC Output	Game Console (18W max) Around 20 Recharges	Drones (60W) Around 9 Recharges	Projector (100W) Around 4.9 Hours
USB/Type-C Output	Camera (8.4W max) Around 25 Recharges	Table Fan (50W) Around 10 Hours	Electric blanket (55W) Around 8.5 Hours
Cigarette Lighter Socket Output	Smartphone (18W) Around 50 Recharges	Laptop (60W) Around 4 Recharges	Car Refrigerator (60W) Around 8.5 Hours

Recharging Method

Before using or storage, if the LCD display shows capacity less than 5%, please recharge the P600 as soon as possible. Connecting your P600 to the AC Adapter until it's fully charged. There are four ways to recharge it:

- Type-C (60W) 10-11 Hours
- AC Adapter (100W) 6-7 Hours
- Car Charger 9-10 Hours
- Support 60W/80W/100W/120W Max Solar Panels (Not included). The charging time is determined by the solar light intensity.


How to Charge the P600

AC Adapter Charging

Use the AC Adapter we provided to charge this unit, the full charge time takes 6-7 hours.


5

When the LCD display shows the battery power of 100%, it indicates that this unit is fully charged.

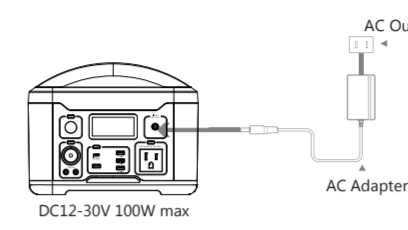

Solar Panel Charging

- Place Solar Panels in direct sunlight as much as possible.
- Support 60W/80W/100W/120W Max Solar Panels (Not included), the charging time is determined by the solar light intensity.

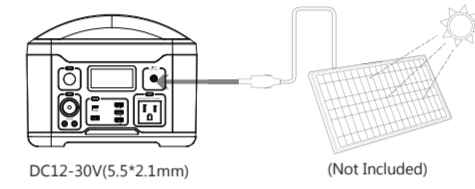


(Not Included)

6


12V Car Charger Charging

Use the Car Charger we provided to charge this unit. The full charge time takes 9-10 hours. When the LCD display shows the battery power of 100%, it indicates that this unit is fully charged.

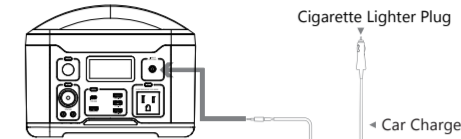

Charge With Type-C 60W Input

- Charge this unit with a type-c to type-c cable and a PD60W wall charger. The full charge time takes 10-11 hours (60W MAX).
- Please use a type-c to type-c cable and a wall charger that support 60W to achieve 60W max charging.

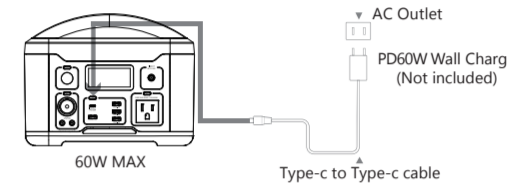

Caution

- During charging, the battery power will be displayed on the LCD screen. When the battery power is 100%, this unit is fully charged. Please disconnect the charger after the charging process is finished.
- To avoid interference, please keep it away from TVs and radios while charging.

7

Operation Instructions

- The LCD display will lit and the function will turn on at the same time when you press any corresponding power switch.
- When the function icons appear on the LCD screen, it means that the output function is turned on and can power for other devices, when the function icons disappear on the LCD screen, it means that the output function is turned off.
- The AC output port can only power the devices with operating power less than 600-Watt. The AC output function will shut off automatically if the continuous power is exceeded 600W, which can ensure the P600 will not be damaged due to overload.
- If you do not use this unit for a long time, it should be recharged every 3 months and the battery power should be kept at more than 80% and store it in a ventilated and dry place.
- In order to save power, if this unit has no power consumption and all output functions are turned off, it will be automatically turned off in 30 seconds.
- Please turn off the corresponding function to save power after using. If you forgot to turn off the power switch, this unit has intelligent detection function, it will be automatically turned off after 6 hours.
- In order to maximize the battery capacity, it is recommended to use it in an environment of 32°F~104°F.
- In order to maintain the life of this unit (lithium battery), please do not run out of the battery power. When the battery power is 5% or less, please recharge this unit immediately.

USB Output

You can connect a standard USB cable to the 5V/2.4A USB output port to charge the smart devices.

5V/9V/12V USB Output

It supports 5V to 12V output up to 18W and can power QC3.0 compatible smart devices. The actual output voltage and current depend on the smart devices.

Type-C Output

It supports 5V to 20V output up to 60W and can power type-C compatible smart devices. The actual output voltage and current depend on the smart devices.

8

DC Output (Rated Output 120W)

12V Cigarette Lighter Socket Output

Connect the devices that need to be powered by 12V Cigarette Lighter Socket, like Car air pump, Car vacuum cleaners, Car refrigerators, etc.

2*12V DC Output (120W Max)

Connect the devices that need to be powered by the 12V DC output ports. Please check if the device supports a 5.5mm DC plug with 12V DC input (the diameter of this unit's DC port: 5.5*2.1mm). If not, you will not be able to use it.

Protection Mode

Short-circuit/Over-load Protection: If the DC ports are short-circuited or overload (load power>120W), this unit will turn off the DC output function for self-protection. Resolve short-circuit or overload problems and press the [DC] button to reset from protection mode.

AC Output (Rated Power 600W, Peak 1000W)

The output voltage of the AC port is 110V and the output frequency is 60Hz. Power the electronic devices with power consumption less than 600W, such as laptops and displays, home appliances, etc.

Protection Mode

Short-circuit/Over-load Protection: If the AC port is short-circuited or overload (load power>600W), this unit will turn off the AC output for self-protection. Some appliances like refrigerators and ice makers may require exceed 600W surge power during startup or operation and this unit may enter overload protection mode. Resolve short-circuit or overload problems and press the [AC] button to reset from protection mode.

Temperature Protection: When the operating temperature reaches 131°F, the fan starts up. If the temperature of this unit is above 194°F, it will turn off the AC output for self-protection. Please reuse this unit after the temperature drops to the normal.

9

Safety Instructions

⚠ DANGER

Noncompliance may very likely lead to serious injury or death.

- DO NOT disassemble, repair or modify the unit or the battery.
- DO NOT expose the product to fire or excessive temperatures. It will explode if the temperature is over 266°F. Keep out of direct sunlight.
- DO NOT charge, use or store the unit in a bathroom or in an area exposed to rain or moisture.
- Only use the output socket to power external devices. Never connect the output to mains power under any condition.
- DO NOT touch the unit or the plug-in points if your hands are wet.
- DO NOT connect any metallic objects to the AC input or output.
- DO NOT rub your eyes if fluid from inside the unit should get in your eyes.
- DO NOT dispose the unit together with household waste.
- DO NOT use any inappropriate power cords.
- DO NOT operate the unit above the specified input voltage.
- DO NOT use the unit if it is not functioning correctly.
- DO NOT drop the unit if it is recharging or in use.

⚠ WARNING

Noncompliance may lead to serious injury or death

- Use and store the unit only in a clean and dry environment. DO NOT use and store in dusty and wet environment.
- DO NOT use the unit if it is damaged or broken. Check the unit prior to every use.
- DO NOT use the unit if the power cord is damaged or broken.
- Keep the unit away from children. DO NOT let children use the power supply unit.
- Keep this product away from pets.
- DO NOT use or store the unit in an area or environment with high temperature.
- Should fluid from inside of the unit come in contact with your skin or clothing, wash the affected areas with tap water.
- DO NOT unplug the power cord from the socket.
- DO NOT charge the unit via power supply systems that operate outside of 100-240V.
- DO NOT place the unit on its side or upside down while in use or storage.
- DO NOT use accessories for other usage.

10

⚠ CAUTION

Noncompliance may lead to injuries and/or property damage.

- If peculiar odors, overheating or other abnormal circumstances are observed, stop using the unit immediately and contact our customer service.
- The unit complies with all legal requirements for transport of dangerous goods.
- Make sure that the unit is properly secured when transporting it in a motor vehicle.
- Only charge, use and store the unit within an ambient temperature of 0 to 45°C (32~113°F).
- Switch the unit off immediately if it has accidentally fallen, was dropped or was exposed to vibrations.
- Carefully read the instructions for the electric devices that you intend to connect to your power supply unit.
- Please remove power plug when the product is not in use.

ATTENTION	
	Not permitted on aircrafts
	To preserve the battery lifespan, please use and recharge at least once every 3 months
	Use original or certified charger and cables
	Avoid extreme temperature
	Avoid dropping
	Do not disassemble

11

	It's not waterproof, do not expose to liquids
	Please dispose of batteries and electronic goods in accordance with local regulations

Disclaimer

- Our company cannot be held liable for damages caused by fire, earthquake, use by a third party, other accidents, intentional misconduct on the part of the customer, abuse or other abnormal conditions.
- Do not repair any damage to the AC plug or power supply on your own.
- The warranty covers all terms and conditions of the warranty. Contents that are not specified in the warranty terms and conditions are beyond our responsibility.
- Our company assumes no liability for damages caused by incorrect use or non-compliance with this instruction manual.

Intended Use: The GOOLOO P600 portable power station is intended as a power supply for electronic devices with a maximum power consumption of 600W. Our product is not suitable to be used with equipment that relates to one's own personal safety and relies heavily on electricity, such as large medical devices, equipment for nuclear facilities, the manufacture of air and spacecraft, etc. We therefore assume no liability for accidents involving personal safety, fires, or machine failures, caused by using our product with the aforementioned devices.

Warranty

Limited Warranty

GOOLOO TECHNOLOGY CO. LTD warrants to the original purchaser that the GOOLOO product will be free from defects in workmanship and material under normal consumer use during the applicable warranty period identified in the 'Warranty Period' section below, subject to the exclusions set forth below. This warranty statement sets forth GOOLOO's total and exclusive warranty obligation. We will not assume, nor authorize any person to assume for us, any other liability in connection with the sale of our products.

12

Warranty Period

The warranty period is 12 months. In each case, the warranty period is measured starting on the date of purchase by the original purchaser. The sales receipt from the first consumer purchase, or other reasonable documentary proof, is required in order to establish the start date of the warranty period.



Scan to see our member for extending more 6 months warranty period

Remedy

GOOLOO will repair or replace (at GOOLOO's option) any GOOLOO product that fails to operate during the applicable warranty period due to defect in workmanship or material. If a valid claim is made during the applicable period, GOOLOO, at its option, will either (1) replace the product or (2) exchange the product with a product that is of equal value. A replacement product assumes the remaining warranty of the original product or ninety (90) days from the date of replacement, whichever is greater.

Limited to Original Buyer

The warranty on GOOLOO's product is limited to the original purchaser and to any subsequent owner.

Exclusions

GOOLOO's warranty does not apply to (i) any product that is misused, abused, modified, damaged by accident, or used for anything other than normal consumer use as authorized in GOOLOO's current product literature, or (ii) any product purchased through an online auction house. GOOLOO's warranty does not apply to the battery cell unless the battery cell is fully charged by you within seven days after you purchase the product and at least every 3 months thereafter.

13

How to Receive Service

To obtain warranty service, contact our customer service team at contact@gooloo.com

FAQS

- Q1: What type of battery is in P600?
A: P600 contains a battery pack which consists of an array of cylindrical 18650 lithium-ion battery cells with high energy density.
- Q2: How do I know if my P600 is charging?
A: Check the LCD Display, if the battery percentage blinks, it indicates the P600 is charging.
- Q3: Can I charge the P600 while powering other devices at the same time?
A: The P600 could power other devices while recharging itself.
- Q4: How do I know if my device will work with the P600?
A: You need to check the rated power and start power of your devices. This may require some research on your end. An online search or examining the user guide for your device should suffice. To be compatible with the P600 you should use devices that require less than 600W.
- Q5: What is the maximum output power of 12V DC port or Cigarette Lighter Socket?
A: Cigarette Lighter Socket+2 x DC Ports total output is 120W, if only use the Cigarette Lighter Socket or 1 of 2 DC Ports, the output power is also 120W. Total load power over 120W will trigger the overload protection.
- Q6: How to turn off the LCD display of the P600?
A: Please turn off the AC/USB/DC/LED power switch when the P600 is not in use. When the AC/USB/DC function icons don't show on the LCD screen, it means all the functions have been turned off, then the LCD display will shut off in 30 seconds.

If you have any other question , please email us at contact@gooloo.com We're happy to answer and deal with your questions.



14