

⚠ WARNINGS AND CAUTIONS

- Make sure **POWER** is **COMPLETELY OFF** at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all times during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Please Note:

- This Alora LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- For dimming, an ELV (Electronic Low Voltage) or TRIAC type of dimmer is required
- 120-277V input

NOTICE

• The important safeguards and instructions outlined in this sheet cannot cover all possible conditions and situations that may occur. It must be understood that caution and certain care factors must be followed. These instructions are provided for your safety and we highly recommend that a licensed, trained electrician install this unit.

ASSEMBLY INSTRUCTIONS

Step 1

Remove fixture from its original package.

Step 2

Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2b).

Step 3

Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package.

Step 4

Make proper electrical connections (**black to hot "L"**, **white to neutral "N"**, **green to "GND"**) with wire nuts provided in hardware package.

Step 5

Attach canopy (2a) to mounting plate (1c) with canopy screws (2b).

Step 6 (For Horizontal Orientation Option)

Secure non-powered backplate (5b) to mounting surface by compressing butterfly clips (5a) through 3/8" holes in ceiling and then use screws (5c) to fasten. (See Illustration 1 for optional mounting option). Attach non-powered decorative cover (6a) to non-powered backplate (5b), followed by pivot (6b) and secure with decorative ring (6c) by threading clockwise. Align hole in pivot (6b) and fixture end (7a) and secure with screw (6d).

Step 7 (For Vertical Orientation Option)

Remove fixture end (7a) and cut excess wire (See Illustration 2). Secure bead end (10a) to fixture by threading clockwise (See Illustration 3)

Step 8

Remove protective paper.

You are now ready to enjoy your fixture.

Wires

Hot (Black) ———

Neutral (White) ———

Ground (Green) ·····


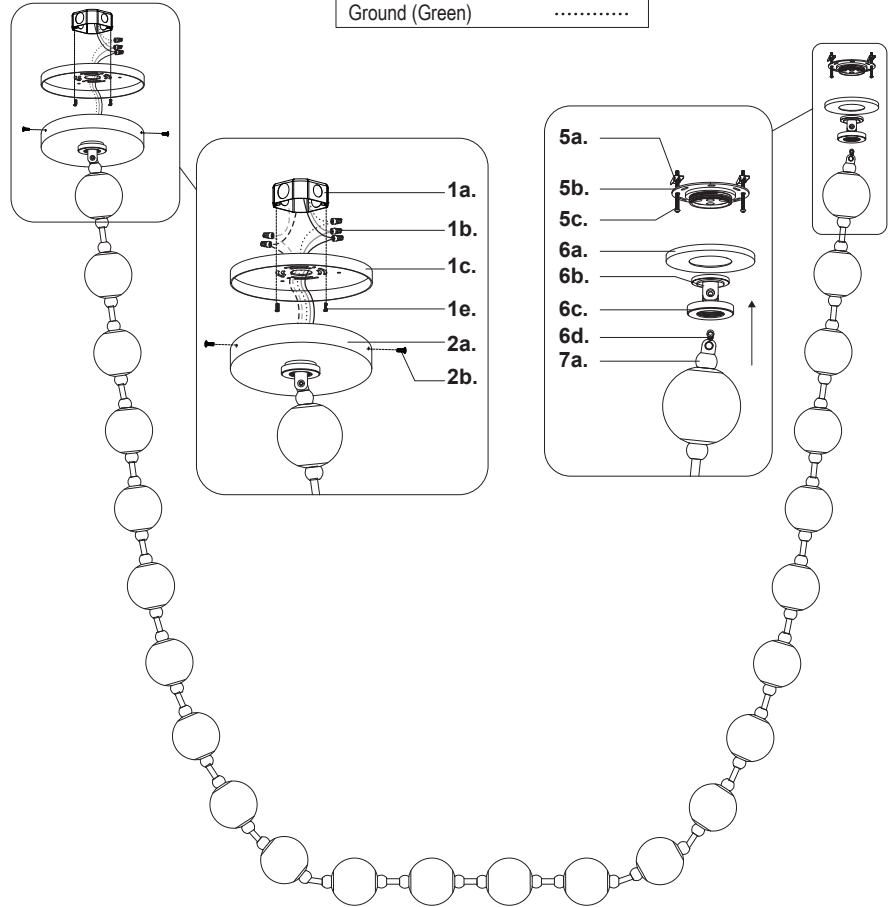


Illustration 1: Optional Mounting Option

With Junction Box



Attach non-powered backplate (5b) to non-powered junction box (8a) with screws (8b).

Illustration 2




Illustration 3

