


Safety & Installation Instructions

v1.2-05.19

- ENG WARNING – RISK OF FIRE AND ELECTRIC SHOCK. THIS PRODUCT IS BEST INSTALLED BY A QUALIFIED ELECTRICIAN. INSTALL IN ACCORDANCE WITH CURRENT NEC WIRING REGULATIONS. SUITABLE FOR DRY LOCATIONS ONLY. TURN OFF POWER AT THE MAIN FUSE BEFORE COMMENCING INSTALLATION.
- FR ATTENTION – RISQUE D'INCENDIE, RISQUE DE CHOC. CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. POUR EMPLACEMENT SECS SEULEMENT. COUPEZ LE FUSIBLE PRINCIPAL AVANT DE COMMENCER L'INSTALLATION.

1. Prepare the fitting for installation- consulting the instructions and diagrams on the inside page. Once desired drop of pendant is established, the cable length may be shortened. If cable is desired length already, then skip to instruction point number 3.
2. To shorten cable:-
 - a. Establish required length of cable (ensuring there is some slack) before using wire cutters to cut.
 - b. Remove the outer insulation from the last 6" of the end of the cable, then remove the last 1/4" of inner sleeving from both cables to expose the wire.
 - c. Make sure that when stripping the outer cable no damage occurs to the interior cable.
3. This fitting should be installed on a 4" junction box (not supplied).
4. Open your existing junction box (if you do not have one in the desired position you will need to get an electrician to install one). If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live, neutral and earth (ground) terminals.
5. Attach the fixing plate to your junction box using the two existing bolts.
6. In your junction box there should be two supply wires and one ground wire. Connect your new lamp to the electrical supply using UL approved wire nuts. Connect the live (hot) black wire from the power supply to the black conductor on the luminaire cable, then the white (neutral) wire to the white conductor on the luminaire cable and bare copper or green/yellow ground wire should be terminated inside the junction box (do not connect to fitting).

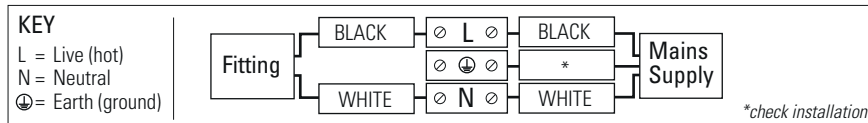

7. Support the fitting so that no strain is applied to the wiring when making the electrical connections. If necessary get a colleague to help.
8. See hanging instructions inside to complete the installation.
9. Fit the correct type and wattage of lamp (or less). Be careful not to overtighten the lamp.
10. Switch on at the fuse-board. Your light fitting is now ready for use.

Other Important Information

Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). Adjust fitting only when power to the fitting is off and has been left to cool. If the electrical flex or electrical components become damaged at any point, power to the fitting should be disconnected immediately and not operated until the damaged parts are fixed/replaced. For use in dry, indoor environment only. Ensure the fitting does not come into contact with any liquids.

Cleaning and Maintenance

Bone china can be cleaned using a soft damp cloth or with a suitable mild (non-abrasive) detergent. Switch off power to the fitting before cleaning.


Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes. All products are hand-assembled in Oxford from high quality components, produced in the UK.

ORIGINALBTC.COM
+44 (0)1993 882 251
UNIT 21 / 22 AVENUE ONE, STATION LANE, WITNEY, OX28 4XZ, ENGLAND




Drop Grouping Pendant Light


Instruction Manual

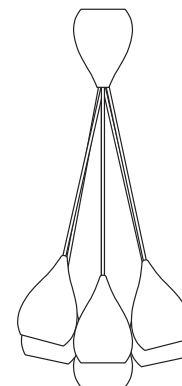


Drop One Small Grouping of Six Pendant, US-FP515

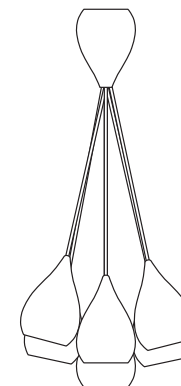


Drop One Grouping of Six Pendant Light US-FP444K

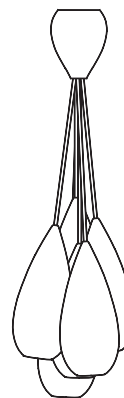

Drop Zero Grouping of Six Pendant Light US-FP469

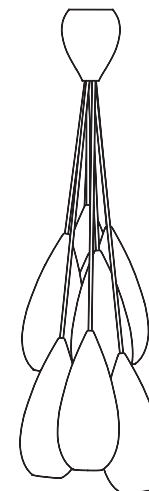

Drop Zero Grouping of Nine Pendant Light US-FP466

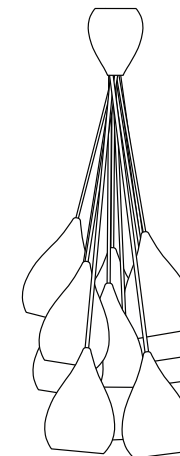

Drop One Grouping of Eleven Pendant Light US-FP445








ORIGINAL BTC
BRITISH LIGHTING MANUFACTURERS
LONDON • NEW YORK • PARIS



Drop Grouping Pendant Light

| 120V ac 60Hz | IP20

- US-FP445 Drop One Grouping of Eleven Pendant Light
- US-FP444 Drop One Grouping of Six Pendant Light
- US-FP515 Drop One Small Grouping of Six Pendant
- US-FP466 Drop Zero Grouping of Nine Pendant Light
- US-FP469 Drop Zero Grouping of Six Pendant Light

LAMP GUIDANCE			
BASE	SHAPE	TYPE*	WATTAGE**
 E26	 A  BALL	INCANDESCENT 	n/a
		CFL 	11W
		ECO-HALOGEN 	n/a
		LED 	9W

* Warm white (2700k) low energy lamps recommended.
 ** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used. Relates to individual shades.

PLEASE READ THE INSTRUCTIONS ON THE REVERSE BEFORE YOU BEGIN INSTALLING YOUR LIGHT

Hanging Instructions

This product is made from Fine Bone China; take care when handling this product during installation and ensure hands are clean to avoid leaving any marks on the surface.

Refer to diagram on opposite page.


STEP 1
 Determine the required drop of the fitting and adjust luminaire cable (E) length as necessary; use wire cutters to cut the cable before stripping 6" of outer insulation & 1/4" inner insulation. The cluster of shades can be arranged as preferred. It is suggested to collect up the shades carefully, one at a time, to arrange them prior to making the electrical connection. Ensure all the cables are free and passed through the ceiling rose centre hole. Once arranged a knot can be tied above the ceiling rose to maintain the desired position, insure the knot is tied around the hanging bracket. The light should be suspended from a secure position. A ceiling fixing plate is supplied. Once the arrangement of the shades has been made, connect the hanging as illustrated.

STEP 2
 Screw the mounting bracket (C) to the junction box using existing screws.

STEP 3
 Make connection to the mains supply (follow instructions over leaf), using suitable wire nuts.

STEP 4
 The ceiling rose can now be pushed up over the bracket and the connection: Loosen the screw on the cord grip (H) before pushing the ceiling rose up so that it sits flush against the ceiling, then tighten the grub screw to hold the ceiling rose in position. Do not overtighten grub screw.

Contents

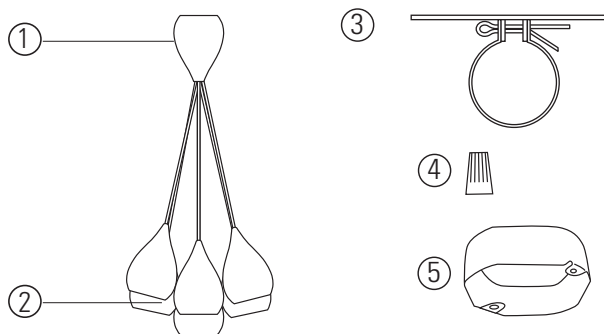

Contents


- 1 Ceiling Rose
- 2 Shade
- 3 Bracket

Tools/Hardware Required

- 4 UL Wire Nuts
- 5 Junction Box

Screwdriver

Installation Diagram

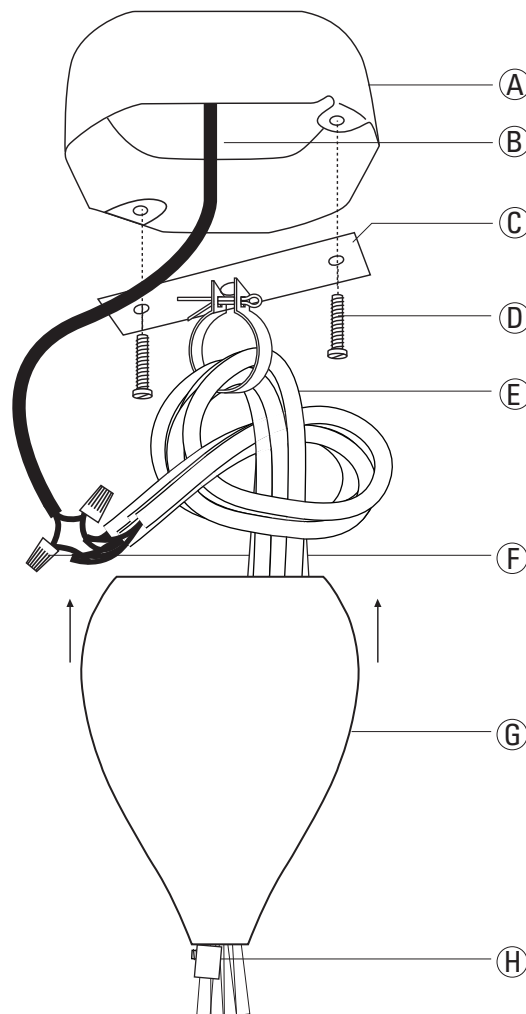

Key

- A Junction Box*
- B Main Supply
- C Mounting Bracket
- D Junction Box Screws*
- E Luminaire Cable
- F Wire nuts*
- G Ceiling Rose
- H Cord Grip
- *not supplied