

4" Freejack Canopy

700FJ4SQ_, 700FJ4RF_ 2.8


GENERAL PRODUCT INFORMATION:

This product is suitable for indoor dry locations only.

This fixture is intended to be used utilizing NEC compliant junction boxes with enough room to house the transformer.

LED Driver Dimensions: 2.20"L x 1.23"H x 0.75"D

This product can be dimmed with a low-voltage electronic dimmer and has a rated maximum output of 60 watts.

For Wood Canopies: Do not install any head or pendant closer than 12 inches to this canopy. Heat from the lamp may damage the wood finish.




CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.


SAVE THESE INSTRUCTIONS!

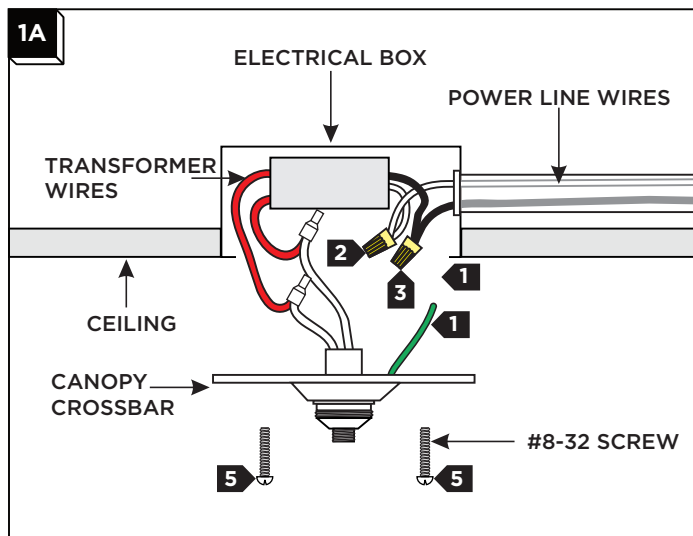

- 1** Ground the canopy in accordance with local electrical code.
- 2** Connect the white transformer wire to the neutral power line wire with a wire nut.
- 3** Connect the black transformer wire to the hot power line wire with a wire nut.
- 4** Place the transformer and all the wires inside the electrical box. Use the adhesive pad to secure the transformer in the electrical box.
- 5** Mount the canopy crossbar to the electrical box with the two long #8-32 screws.

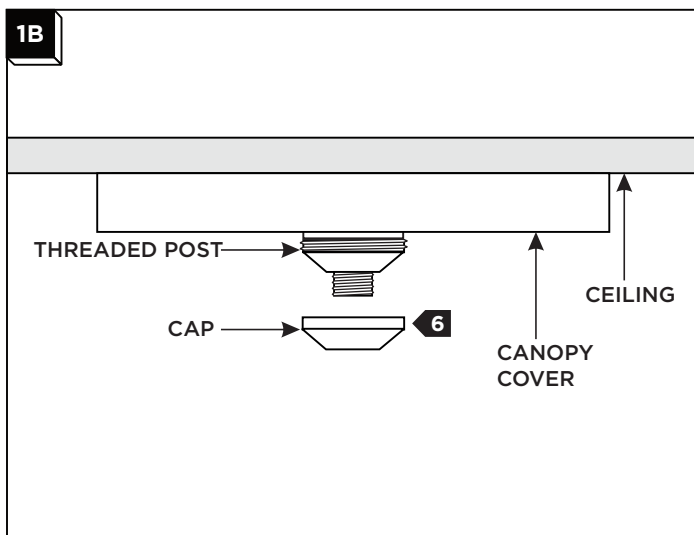

- 6 Place the canopy cover over the crossbar and screw the cap onto the threaded crossbar post.

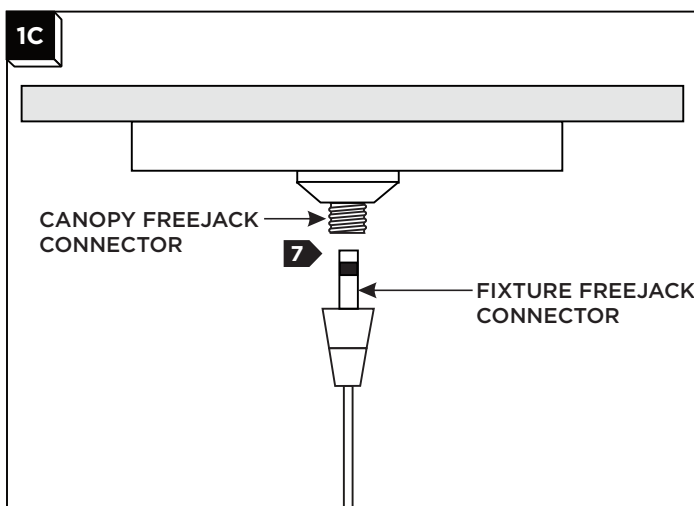

- 7 Screw the Fixture FreeJack male connector into the FreeJack female connector.

 **TECH LIGHTING**

7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.techlighting.com