

DV-LED Installation Guide



Pre-Setup



Please read entire instruction sheet before you start.

Please consult with a trained electrician at least one day before installation to discuss the power points for the DV-LED video wall.

Please consult with your project manager for arrangements on where to house the external sending card box and media player.



Tools: 1 x Screwdriver, 1 x Drill, 1 x Spirit Level, 1 x Magnetic Module Tool


Parts List



As each DV-LED display is unique, these figures are based per cabinet/module

For each cabinet enclosure there should be;

- 1 x Power Supply Cable
- 1 x Network Cable
- 6 x LED Modules
- 5 x M8 Screws (pictured)




For each module there should be;

- 8 x Magnetic Screws (pictured)
(8 Screws x 6 Modules = 48 screws per cabinet)




Based on your DV-LED configuration you should be able to calculate how many protective edging pieces you need. There are two different sizes depending on whether the edging is going on the top/bottom of the cabinet or the side.

Depending on the configuration of your DV-LED Video Wall you will be supplied with mounting brackets either 1.2m in length or 1.8m in length. We do NOT supply screws for the mounting bracket due to the various types of walls which the mounting brackets can be used upon.



For each 1.2m section of bracket we recommend of using 5-6 M8 screws as minimum.



For each 1.8m section of bracket we recommend of using 6-8 M8 screws as minimum.


Instructions

Step 1

Clear a space on the floor and lay the cabinets in the formation they will be going on the wall. The cabinets should be facing up with the interior of the cabinet exposed.

Step 2

Within your layout, organise the cabinets into vertical columns and screw the cabinets together vertically using two of the M8 screws for each cabinet as per the diagram below.

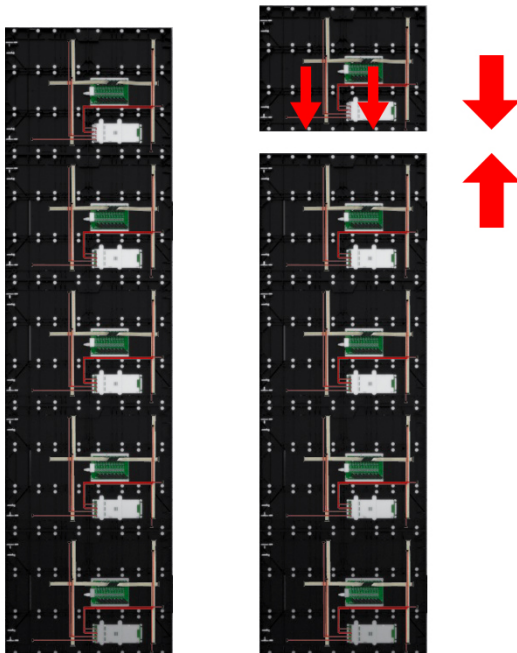


Step 3

Once a vertical column is done, flip it over and attach the mounting bracket on the backs of each cabinet that is needed to be hung.



Please note: This does NOT mean every cabinet needs a bracket. The rule is one bracket for every 3 cabinets it supports. Please see the diagram below for how this works.

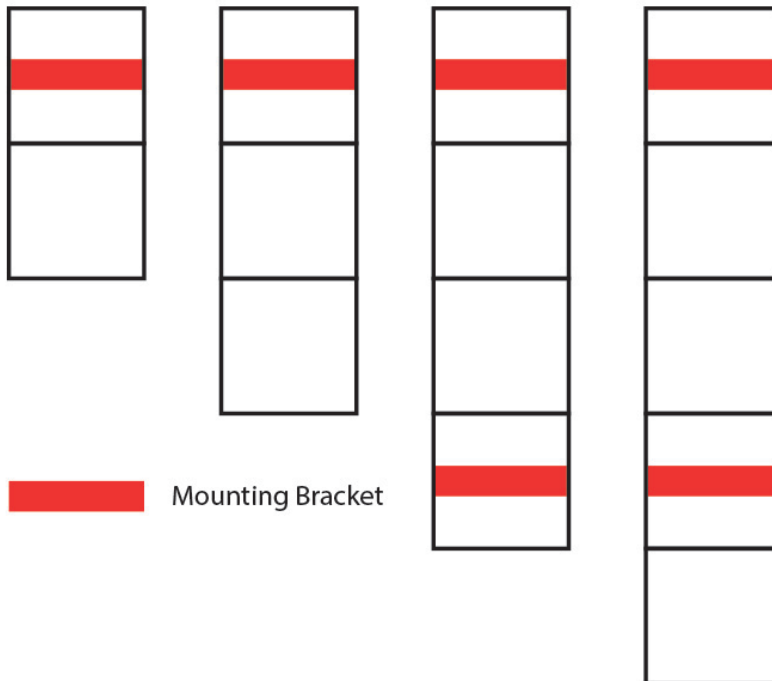


Step 4


Next, attach the mounting brackets to the wall for the number of horizontal cabinets you have. There are two lengths of mounting brackets available and you may need to use a combination of both. The shorter 1.2m bracket can mount two cabinets wide and the longer 1.8m bracket can mount 3 cabinets wide.

Step 5

Lift each cabinet column off the floor and onto the mounting brackets on the wall. Secure with the screws provided.

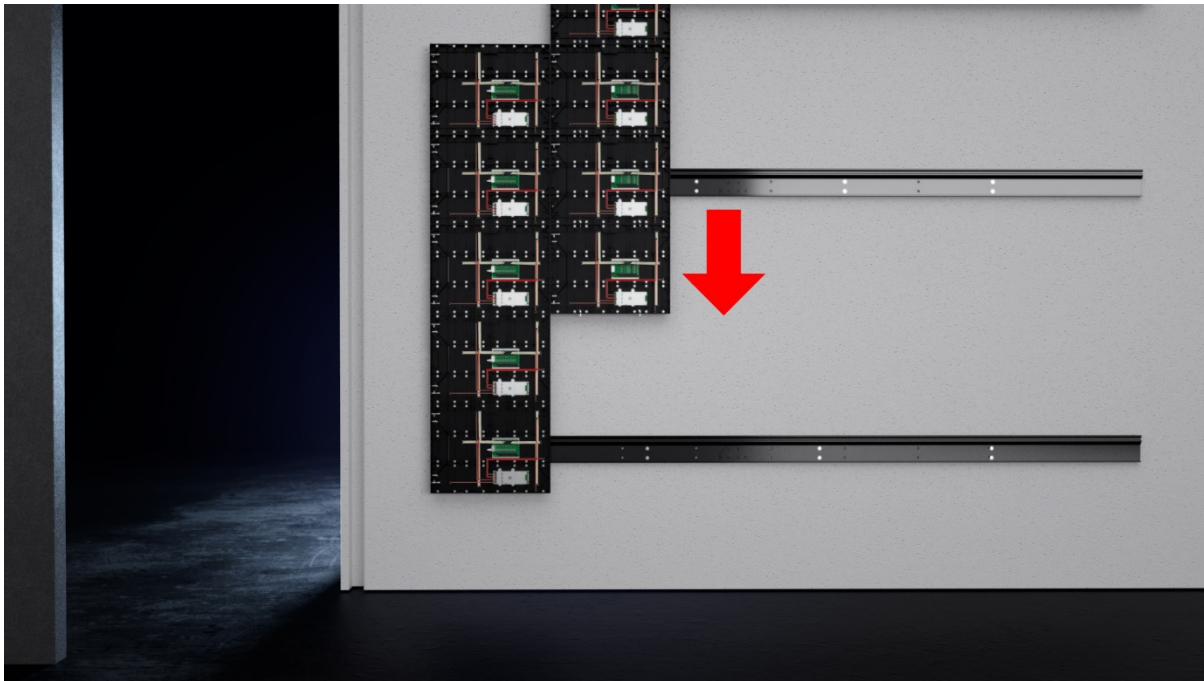


Your DV-LED Video Wall should now look something like this.

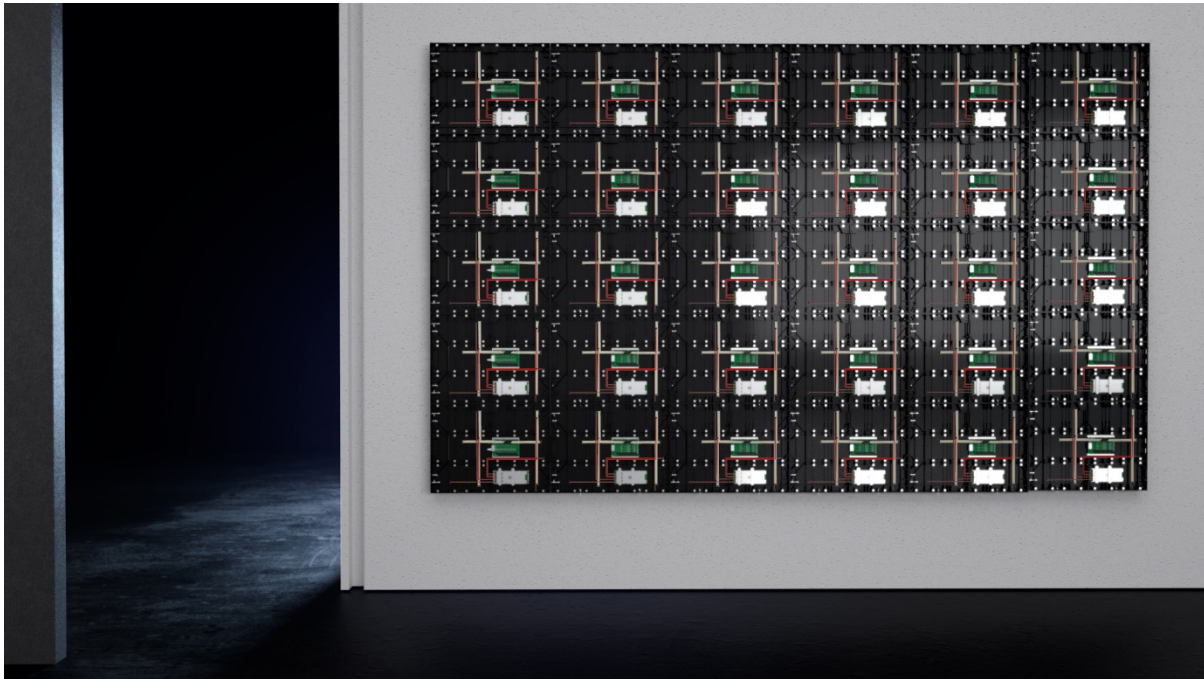


Step 6

Attach each of the columns to its horizontal neighbour. Take a cabinet and secure it to the neighbor using 3 of the M8 screws provided as per the diagram.

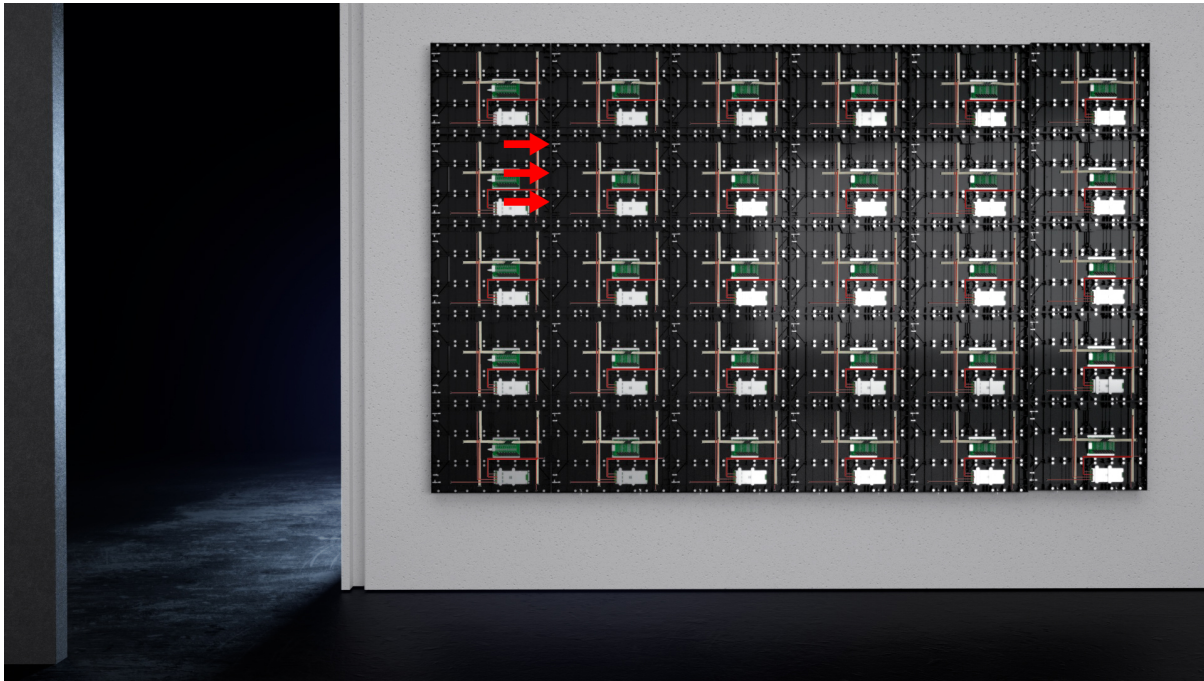

Step 7

Working top to bottom in each vertical column use the built in cable with connectors to attach the **power supplies** from one cabinet to the next until you are left with the power supply cable sticking out of each of the bottom cabinets.

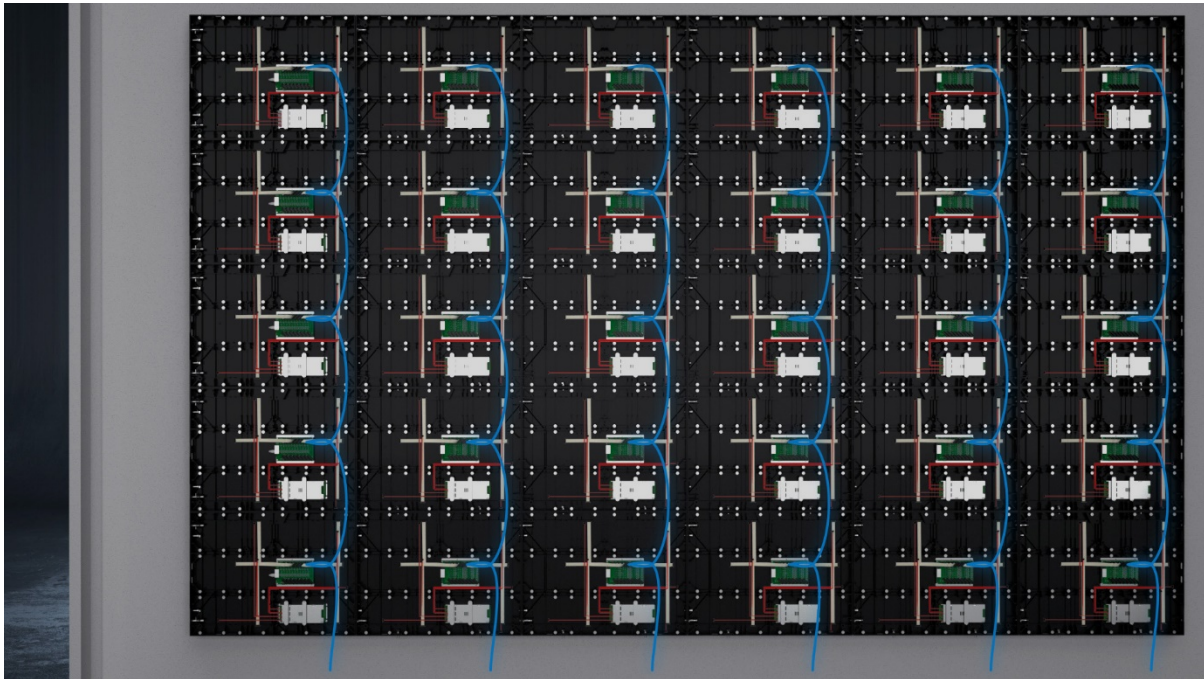



i Please note: If needed you can arrange the power cables so they go out the top of the cabinets.

Step 8

Remove the connector from the cable sticking out of the bottom and link the wires to the power points as planned with your electrician.


Step 9

Next take the **data cable** and working from the top right corner connect all the cabinets using the RJ45 ports, you can use either port for in and out. You should connect them like a snake, working vertically up and down and across each column until all the cabinets are connected.

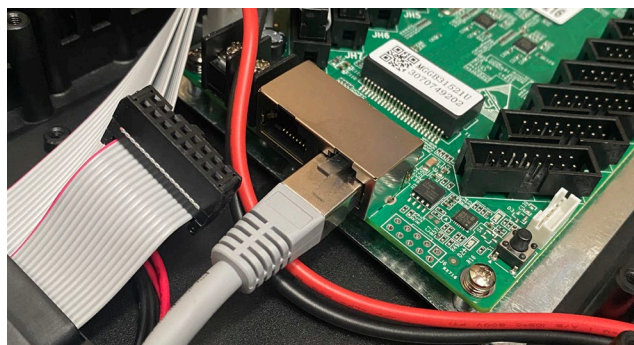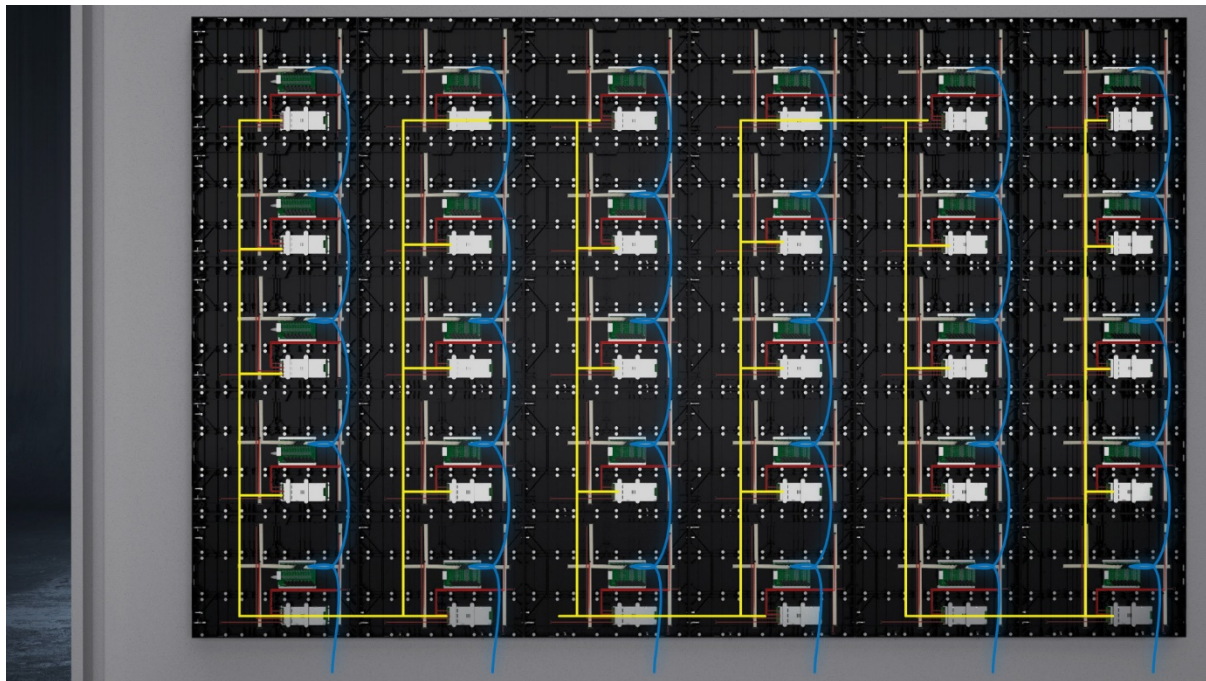

Step 10

Check around the outside of the cabinet, if there are any screws sticking out now is the time to remove them from the inside of the cabinet. There are two different types of screws that may need to be removed. To remove the screws on the sides of the cabinets you may need to unscrew the stopper (circled in red).

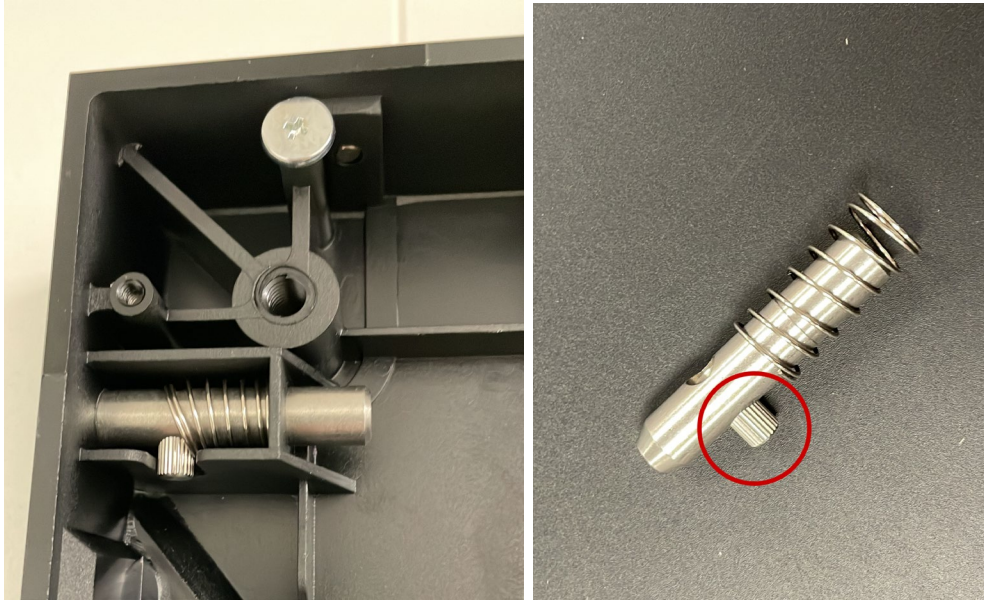

Step 11



Take the modules out of the box and connect the magnetic screws. For each module attach 8 screws, 4 along the top and 4 along the bottom.

i **Please note:** You can do this by hand or by using a standard drill

Step 12


Attach the magnetic screws to the modules. For each module there should be 8 screws attached along the top and bottom as in the diagram below. Now attach the modules to the cabinets, for each module you need to connect a power cable and data cable,

the module should easily snap onto the magnetic screws. For each cabinet there should be 6 modules.

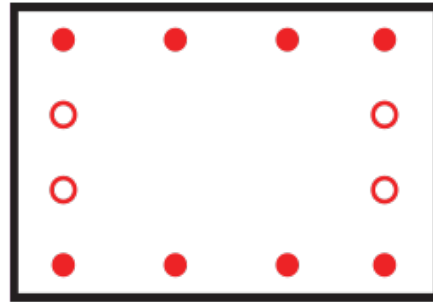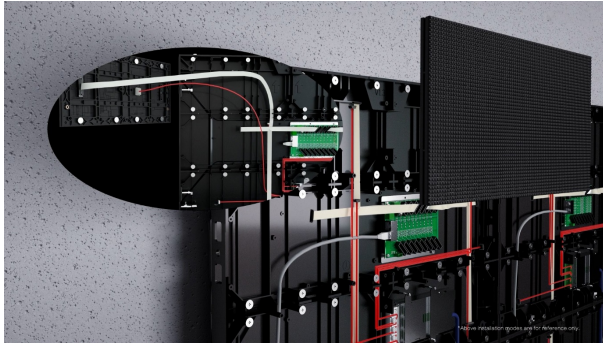

Step 13

For a clean finish now attach the protective edging. You may need to temporarily pop off some of the modules to secure the edging using the rivets provided. After the edging is attached you can reattach the modules. Make sure you thread the power cables/data cable through the protective edge as you attach the bottom sections of edging.

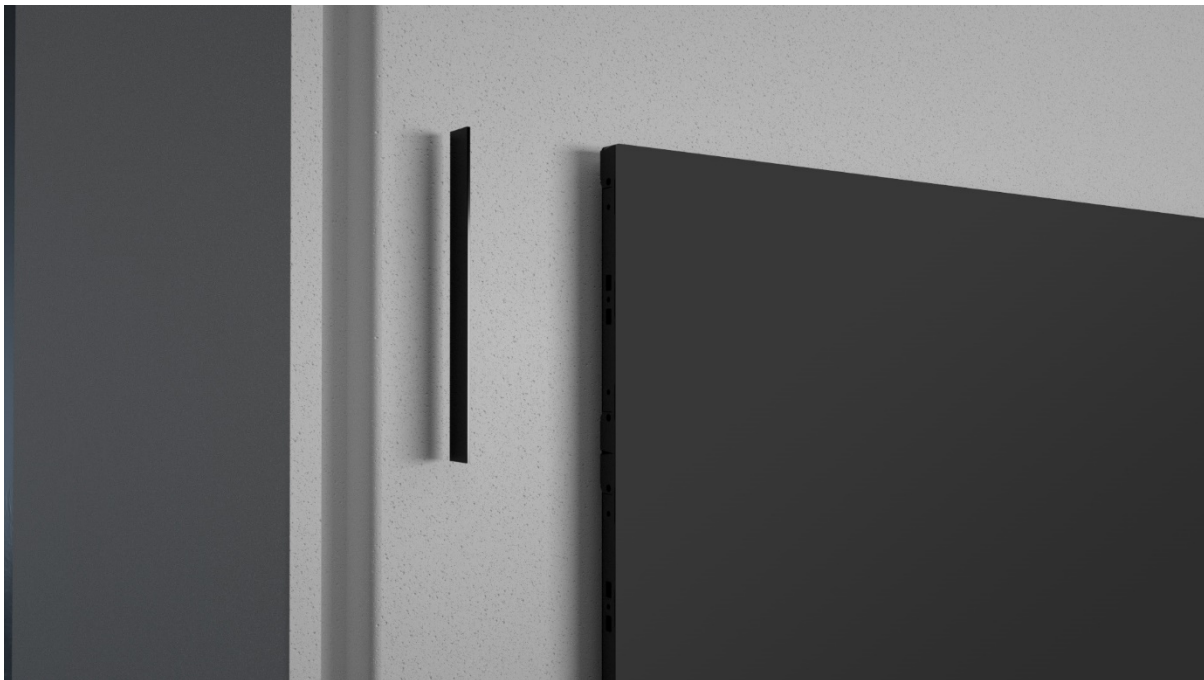

Step 14

The final steps are to connect the loose cables. Connect each of the power cables in the vertical columns to the power sources. Take the data cable and connect it to the pre-configured sending box which should connect to the pre-configured media player.