

TOUCH-1SP

Nexta Tech

company brand of Team srl
via G.Oberdan 90, 33074
Fontanafredda (PN) - Italy
Ph. +39 0434 998682
Email: info@nexta-tech.com
Web: www.nexta-tech.com



MN1TOUCH1CV1.1

1.1 PRODUCT FEATURES



Motion sensor with daylight function and settable detection area.

Two functions: sensor or wireless push button.

1.2 TECHNICAL DATA

| | |
|-----------------|-------------------------------|
| Power supply | Battery CR 2450 |
| Battery life | About 2 years |
| Code | Rolling code |
| Radio frequency | 433.92 MHz ISM |
| Range | 100 m (40 m inside buildings) |
| Dimensions | 40 mm x 40 mm h 10 mm |

2 BATTERY CHANGE

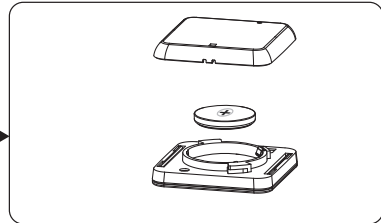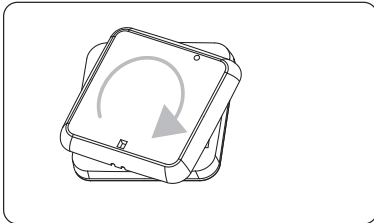

3 TRANSMITTER PROGRAMMING


This procedure is used to programme a channel in order to then associate it with a compatible receiver. Access to the receiver is required to carry out the following procedure.

STEP1

Activate the receiver on which you want to use the transmitter in "multifunctional remote control radio programming" (see receiver manual).


STEP2

With the help of a paper clip make a short press on the button in the back of the sensor (the led of the sensor turn on green)



STEP3

With the help of a paper clip make a short press on the button in the back of the sensor (the led of the sensor flashes 3 times)



4 USE OF THE SENSOR

There is two selectionable functioning mode:


AUTOMATIC: when the sensor is turn on, the light turn on automatically while it detects a movement and turn the light off after a pre-set time.

It's possible to set a brightness threshold to avoid the turn on of the light if the environmental light is enough. The detection area, the timed on and the ebrightness threshold can be set with the procedure explained in paragraph 5.

MANUAL: if the sensor is off, the central button can be used to send a command:

SHORT PRESS= On/Off

LONG PRESS= Dimmer Down and Dimmer Up

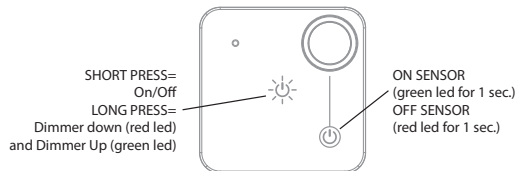

ATTENTION: to send manual command the sensor must be switch off

5 SENSOR SETTING

The sensor is supplied with pre-set parameters: DETECTION AREA= max ; BRIGHTNESS THRESHOLD= off ; TIMED ON= 5 minutes.
These parameters can be modify with following procedure:

STEP1

With the help of a paper clip press and hold the button on the back of the sensor:
the led turns on and cyclically changes color



LED CHANGE
COLOR
CYCLICALLY



STEP2

Release the button when the led is on the color corresponding to the function that you want to modify:

RED=
DETECTION AREA

GREEN=
LIGHT SENSOR

YELLOW=
TIMED OFF


STEP3a

Release the button when the led is red to set the detection area of the sensor




STEP3b

Release the button when the led is green to set the brightness threshold of the sensor




STEP3c

Release the button when the led is yellow to set the timed on off the light




STEP4a

Make a short press on the button on the back of the sensor, the led starts to flash, count the flashes




STEP4b

Make a short press on the button on the back of the sensor, the led starts to flash, count the flashes



STEP4c

Make a short press on the button on the back of the sensor, the led starts to flash, count the flashes



STEP5a

Make a short press on the button on the back of the sensor during the flash that correspond to the desired function (default= n°1)

| n° | Function |
|----|--------------------|
| 1 | Max detection area |
| 2 | Level 2 |
| 3 | Level 3 |
| 4 | Level 4 |
| 5 | Min detection area |

STEP5b

Make a short press on the button on the back of the sensor during the flash that correspond to the desired function (default= n°1)

| n° | Function |
|----|--|
| 1 | No threshold (the sensor always turns on the light) |
| 2 | Level 2 |
| 3 | Level 3 |
| 4 | Level 4 |
| 5 | Level 5 |
| 6 | High level (the light turns on only when in deep darkness) |

STEP5c

Make a short press on the button on the back of the sensor during the flash that correspond to the desired function (default= n°3)

| n° | Function |
|----|------------|
| 1 | 5 seconds |
| 2 | 1 minute |
| 3 | 3 minutes |
| 4 | 5 minutes |
| 5 | 20 minutes |
| 6 | 30 minutes |
| 7 | 1 hour |
| 8 | 2 hours |

ATTENTION: The life of the battery depends to the set "timed on" and to the number of actions of the sensor.

"5 seconds" setting must be use only for demonstrative purpose: the life of the battery severely decreases.

"1 minute" setting must be use only for not intensive application (exaple: wardrobe)