

ibells


TRANSMITTER

KT-B01



Manual

FUNCTIONAL DIAGRAM

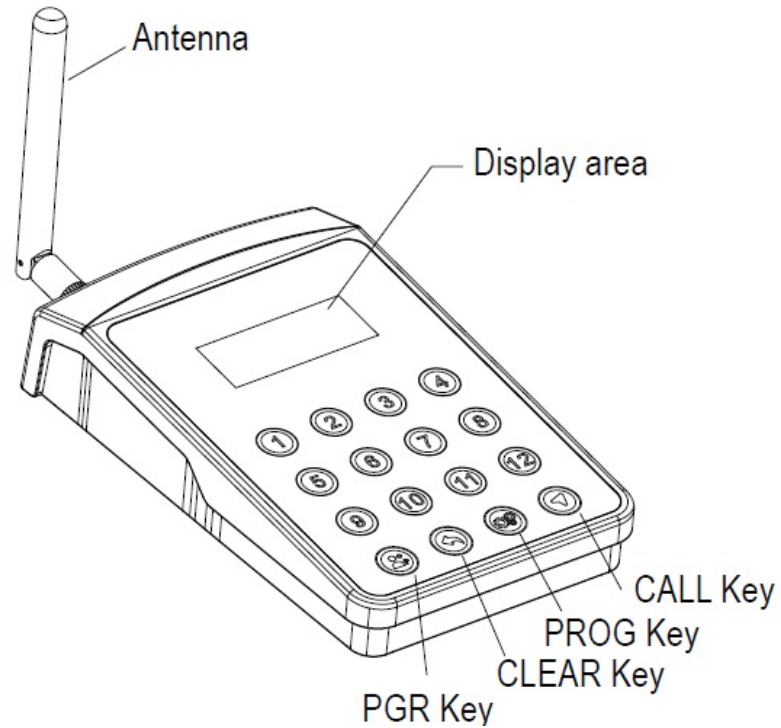

KEYPAD ID SETTING (F1, 1-999):

The three digits displayed on the screen after connecting the power supply is the keyboard ID.

1. In the Call Mode, press “PROG” button to enter the setting mode, F1 is displayed on the screen.
2. Press “PROG” button to enter the sub-menu, F. 0 is displayed on the screen
3. Enter the desired keypad ID through the keypad (1/2/3/4/5/6/7/8/9/10 are the valid keys, 10 represents 0)
4. Press “PROG” button to save the setting, the keypad beeps at the same time.
5. Press “CLEAR” button twice to return to the call mode



CALL FUNCTION (1-12):

In the Call Mode, press the Number key can page the corresponding watch pager. The number flashes on the screen at the same time.

If you need to page the watch pagers with ID from 13 to 999

1. In the Call Mode, press “PGR” button to enter combined numerical call state , P.0 is displayed on the screen
2. Enter the desired number through the keypad (1/2/3/4/5/6/7/8/9/10 are the valid keys, 10 represents 0)
Press “CALL” button to confirm, the corresponding watch pager within the effective distance will receive the call.

NOTE:

1. Press “PGR” button can exit the combined numerical state and return to the call state.
2. The number flashes on the screen means the call is successful

