


Grease Interceptors & Trash Bin

Grease Interceptors

- New quick-connect latching system and removable baffles allows for easy cleaning
- Injection molded in high quality thermoplastic
- Recess extension risers are available
- 10 years extended warranty

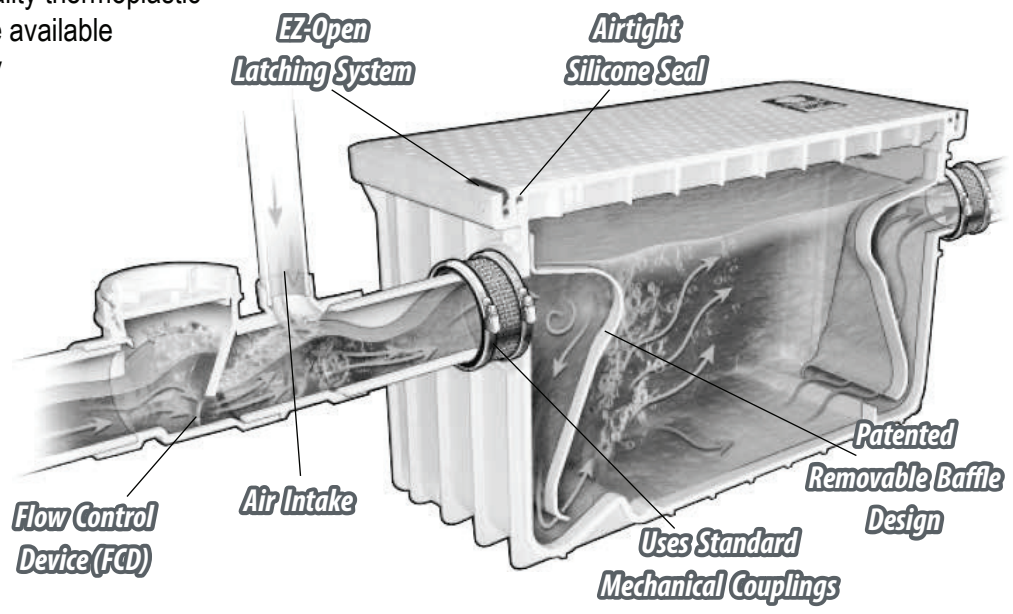

LPS: liters per second


Item No.	Size GPM/ lb	Connection Size (in)	Flow Rate GPM / LPS	Actual Grease Cap.		Dimension (in)	G. W. (lb)
				lb.	kg		
3915A02C	15 / 30	2	15 / 0.94	40.97	18.58	14.5 x 17.5 x 16.3	22.1
3920A02	20 / 40	2	20 / 1.26	76.4	34.65	23.6 x 17.5 x 16.3	25
3925A02LO	25 / 50	2	25 / 1.58	53.4	24.22	31 x 23.5 x 11	45
3925XTA03	25 / 50	3	25 / 1.58	73.01	33.11	31.25 x 18.5 x 16.25	37.77
3935A03	35 / 70	3	35 / 2.21	138.5	62.8	31 x 23.5 x 17.5	54
3935A04	35 / 70	4	35 / 2.2	138.5	62.8	31 x 23.5 x 17.5	57
3950A03	50 / 100	3	50 / 3.15	122	55.3	31 x 23.5 x 23.5	65
3950A04	50 / 100	4	50 / 3.15	122	55.3	31 x 23.5 x 23.5	70

Grease Interceptors Extension Kits



3925A02LO LO-PRO

Based on the same Dimension (in) al footprint as our successful 35gpm and 50gpm models, this latest 25gpm addition has an overall height of just 11 inches, and still meets the requirements of ASME A112.14.3.



Item No.	A (in)	B (in)	For	G. W. (lb)
3920AX6	23.6	7	3915A02C, 3920A02, 3925A03	10
3935AX6	31	7	3935A03, 3935A04, 3950A03, 3950A04	70