



WiFi
DOOR SENSOR
INSTRUCTION



Product Part Illustration



guardiansupportservices.co.nz

Specifications

Battery: CR2-3V x 1
 Standby current: 13uA
 Alarm current: 115mA-120mA
 Standby time: 5years
 Battery Life: 2800 times trigger(1 year if trigger 7 times per day, 2 years if trigger 3 times per day)
 Wireless type: 2.4GHz
 Wireless standard: IEEE 802.11b/g/n
 Wireless range: 45M
 Operating Temperature: 0°C ~ 40°C (32°F ~ 104°F)
 Operating Humidity: 20% ~ 85%
 Storage Temperature: 0°C ~ 60°C (32°F ~ 140°F)
 Storage Humidity: 0% ~ 90%
 Size: Main body: 71mm x 21mm x 22 mm
 Small body: 40mm x 11mm x 11 mm

LED State

Device Status	LED State
Smart Wi-Fi	Indicator Flashes quickly
AP mode	Indicator Flashes slowly
Turn on	Indicator Flashes
Turn o	Indicator o
Reset	Indicator lights up for 4s and after 2 seconds light turns off , this indicates the device has gone into connection mode


How to reset?

(1) Press the reset button for 6 seconds until the indicator starts flashing rapidly this means the device has activated smart WiFi mode.
 (2) Press the reset button again for 6 seconds until the indicator starts flashing slowly. This means the device is in AP AP mode.

Get Started with IDFI Smart App

- 1. Download APP**
 - Download the "IDFI SMART" app from APP Store or Google Play to your mobile.
- 2. Register and Login**
 - Launch the "IDFI SMART" app.
 - To register, enter your mobile phone number or email address, create a password, then login to the app.
 - Login if you have an account already.**
- 3. Add Device**
 - Power on the smart sensor the default mode is **Smart WiFi** mode.
 - Select the "+" symbol on the top right-hand corner.
 - Select your product type and follow the instructions of the app.
 - If the connecting fails, try using AP Mode**
 - On the "Add device" page select "AP Mode" on the top right-hand corner and follow the instructions of the app.
 - If you have questions call you Guardian Support Consultant

App User Interface

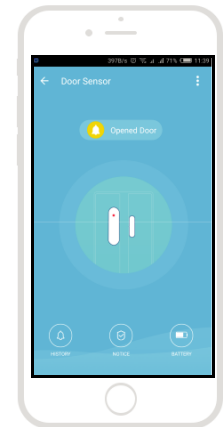

IDFI SMART

Experience Advanced Features

If you have Wifi Light switches installed you will be able to activate the switch via the scene settings

- Main function**
- Working status, open/close the door(the device needs to be triggered for 3-5s)
 - Alarm recording (click"HISTORY").
 - Turn OFF/On push notification (click"NOTICE").

- Linkage alarm setting**
- To connect two Sensors via scene setting.

- Device sharing**
- Allow others to control the device

- Push notifications caution**
- Open/close push notification

- Remove device**
- Restore default settings; Delete and add the device again to clear the record by APP.



a division of idfi Ltd



Peace of Mind For Family & Caregivers

