



Project _____
 Item # _____
 Quantity _____


Glo-Rite® Display Lights

Models: HL-18, -24, -24-2, -30, -30-2, -36, -36-2, -42, -42-2, -48, -48-2, -54, -54-2, -60, -60-2, -66, -66-2, -72, -72-2

Durable and effective, the Glo-Rite® Display Lights are made of extruded aluminum housings with bright-annealed reflectors for maximum brightness. Ideal for use in food preparation, holding and display areas.

Standard features

- Extruded aluminum housings
- Models available from 18" up to 6' (457-1829 mm)
- Incandescent bulbs with special protective coating to guard against food contamination
- Bright-annealed reflectors for maximum brightness
- Each unit has its own on/off switch for operator control
- Extra lamps available on models from 24" to 72" (610 to 1829 mm)

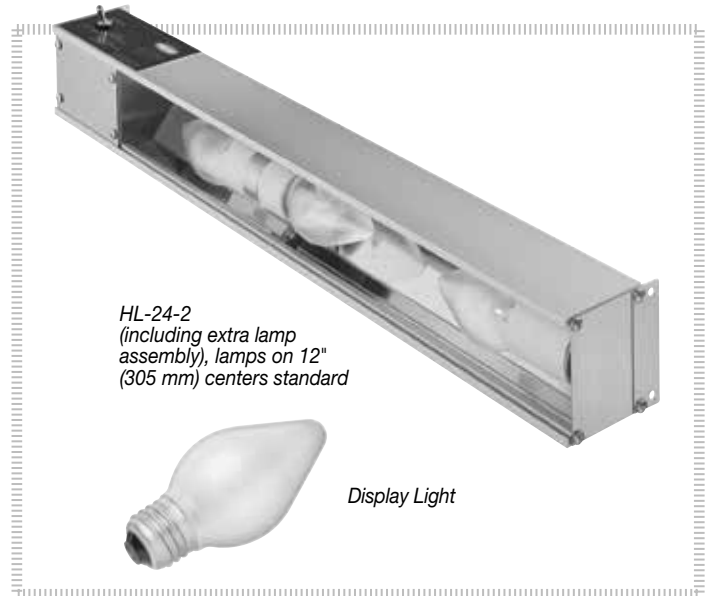

Options (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable –

- Warm Red Black Gray Granite White Granite
 Navy Blue Hunter Green Antique Copper

- Halogen Bulbs in lieu of standard Bulbs (120V only)
 40 Watt Bulbs in lieu of standard Bulbs (120V only - ideal for salad bars)
 Remote Toggle Switch Control (Max. 15 amps)

Extended Electrical Leads – choose length below

- 1'-5' (305-1525 mm) 6'-10' (1829-3048 mm)
 11'-15' (3352-4572 mm) 16'-20' (4877-6096 mm)

Accessories

- Adjustable Angle Brackets (pair)

For operation, location and safety information, please refer to the Installation & Operating Manual.







Glo-Rite® Display Lights

Models: HL-18, -24, -24-2, -30, -30-2, -36, -36-2, -42, -42-2, -48, -48-2, -54, -54-2, -60, -60-2, -66, -66-2, -72, -72-2

HL

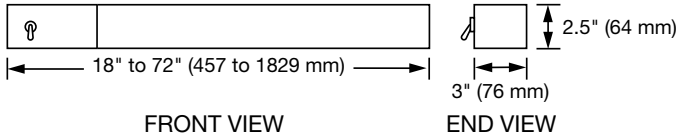

Adjustable Angle Bracket

SPECIFICATIONS

Glo-Rite® Display Lights

Phase: All Single Phase

| Model | Dimensions (W x D x H) | # of Bulbs | Voltage | Watts | Amps | Ship Wgt* |
|----------|--|------------|--------------|---------|---------|-------------------|
| HL-18 | 18" x 3" x 2.5" (457 x 76 x 64 mm) | 2 | 120 | 120 | 1.0 | 6 lbs. (3 kg) |
| | | | 220-230 (CE) | 100-110 | 0.5-0.5 | |
| | | | 230-240 (CE) | 110-120 | | |
| HL-24 | 24" x 3" x 2.5" (610 x 76 x 64 mm) | 2 | 120 | 120 | 1.0 | 7 lbs. (3 kg) |
| | | | 220-230 (CE) | 100-110 | 0.5-0.5 | |
| | | | 230-240 (CE) | 110-120 | | |
| HL-24-2† | 24" x 3" x 2.5" (610 x 76 x 64 mm) | 3 | 120 | 180 | 1.5 | |
| | | | 220-230 (CE) | 150-165 | 0.7-0.7 | |
| | | | 230-240 (CE) | 165-180 | 0.7-0.8 | |
| HL-30 | 30" x 3" x 2.5" (762 x 76 x 64 mm) | 2 | 120 | 120 | 1.0 | 7 lbs. (3 kg) |
| | | | 220-230 (CE) | 100-110 | 0.5-0.5 | |
| | | | 230-240 (CE) | 110-120 | | |
| HL-30-2† | 30" x 3" x 2.5" (762 x 76 x 64 mm) | 4 | 120 | 240 | 2.0 | |
| | | | 220-230 (CE) | 200-220 | 0.9-1.0 | |
| | | | 230-240 (CE) | 220-240 | 1.0-1.0 | |
| HL-36 | 36" x 3" x 2.5" (914 x 76 x 64 mm) | 3 | 120 | 180 | 1.5 | 8 lbs. (4 kg) |
| | | | 220-230 (CE) | 150-165 | 0.7-0.7 | |
| | | | 230-240 (CE) | 165-180 | 0.7-0.8 | |
| HL-36-2† | 36" x 3" x 2.5" (914 x 76 x 64 mm) | 5 | 120 | 300 | 2.5 | |
| | | | 220-230 (CE) | 250-275 | 1.2-1.2 | |
| | | | 230-240 (CE) | 275-300 | 1.2-1.3 | |
| HL-42 | 42" x 3" x 2.5" (1067 x 76 x 64 mm) | 3 | 120 | 180 | 1.5 | 10 lbs. (5 kg) |
| | | | 220-230 (CE) | 150-165 | 0.7-0.7 | |
| | | | 230-240 (CE) | 165-180 | 0.7-0.8 | |
| HL-42-2† | 42" x 3" x 2.5" (1067 x 76 x 64 mm) | 6 | 120 | 360 | 3.0 | |
| | | | 220-230 (CE) | 300-330 | 1.4-1.4 | |
| | | | 230-240 (CE) | 330-360 | 1.4-1.5 | |
| HL-48 | 48" x 3" x 2.5" (1219 x 76 x 64 mm) | 4 | 120 | 240 | 2.0 | 11 lbs. (5 kg) |
| | | | 220-230 (CE) | 200-220 | 0.9-1.0 | |
| | | | 230-240 (CE) | 220-240 | 1.0-1.0 | |
| HL-48-2† | 48" x 3" x 2.5" (1219 x 76 x 64 mm) | 7 | 120 | 420 | 3.5 | |
| | | | 220-230 (CE) | 350-385 | 1.6-1.7 | |
| | | | 230-240 (CE) | 385-420 | 1.7-1.8 | |

■ The shaded areas contain electrical information for International models only

| Model | Dimensions (W x D x H) | # of Bulbs | Voltage | Watts | Amps | Ship Wgt* | |
|----------|--|------------|--------------|---------|---------|-------------------|-------------------|
| HL-54 | 54" x 3" x 2.5" (1372 x 76 x 64 mm) | 4 | 120 | 240 | 2.0 | 12 lbs. (5 kg) | |
| | | | 220-230 (CE) | 200-220 | 0.9-1.0 | | |
| | | | 230-240 (CE) | 220-240 | 1.0-1.0 | | |
| HL-54-2† | 54" x 3" x 2.5" (1372 x 76 x 64 mm) | 8 | 120 | 480 | 4.0 | 13 lbs. (6 kg) | |
| | | | 220-230 (CE) | 400-440 | 1.8-1.9 | | |
| | | | 230-240 (CE) | 440-480 | 1.9-2.0 | | |
| HL-60 | 60" x 3" x 2.5" (1524 x 76 x 64 mm) | 5 | 120 | 300 | 2.5 | | 14 lbs. (6 kg) |
| | | | 220-230 (CE) | 250-275 | 1.2-1.2 | | |
| | | | 230-240 (CE) | 275-300 | 1.2-1.3 | | |
| HL-60-2† | 60" x 3" x 2.5" (1524 x 76 x 64 mm) | 9 | 120 | 540 | 4.5 | | |
| | | | 220-230 (CE) | 450-495 | 2.1-2.2 | | |
| | | | 230-240 (CE) | 495-540 | 2.2-2.3 | | |
| HL-66 | 66" x 3" x 2.5" (1676 x 76 x 64 mm) | 5 | 120 | 300 | 2.5 | 15 lbs. (7 kg) | |
| | | | 220-230 (CE) | 250-275 | 1.2-1.2 | | |
| | | | 230-240 (CE) | 275-300 | 1.2-1.3 | | |
| HL-66-2† | 66" x 3" x 2.5" (1676 x 76 x 64 mm) | 10 | 120 | 600 | 5.0 | | |
| | | | 220-230 (CE) | 500-550 | 2.3-2.4 | | |
| | | | 230-240 (CE) | 550-600 | 2.4-2.5 | | |
| HL-72 | 72" x 3" x 2.5" (1829 x 76 x 64 mm) | 6 | 120 | 360 | 3.0 | 16 lbs. (7 kg) | |
| | | | 220-230 (CE) | 300-330 | 1.4-1.4 | | |
| | | | 230-240 (CE) | 330-360 | 1.4-1.5 | | |
| HL-72-2† | 72" x 3" x 2.5" (1829 x 76 x 64 mm) | 10 | 120 | 600 | 5.0 | | |
| | | | 220-230 (CE) | 500-550 | 2.3-2.4 | | |
| | | | 230-240 (CE) | 550-600 | 2.4-2.5 | | |

* Shipping weight includes packaging.

† With 60 watt bulb.

‡ Includes extra lamp assembly.

TOGGLE SWITCH

Amps: Max. 15 amps.

Location: Chef's left side unless specified.

LEADS

6" (152 mm) leads – server's right.

PRODUCT SPECS

Glo-Rite® Display Lights

The Display Light shall be a Glo-Rite® Model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Display Light shall be rated at ... watts, ... volts and be ... inches (millimeters) in overall width. It shall consist of an extruded aluminum housing with bright annealed

reflectors and shatter-resistant incandescent display lights. Accessories shall include adjustable angle bracket.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION

(800) 558-0607 | (414) 671-6350

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

www.hatcocorp.com | support@hatcocorp.com