



Project _____
 Item # _____
 Quantity _____

Ultra-Glo® Ceramic Dual Infrared Strip Heaters


Models:

- UGA-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D
- UGAH-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D
- UGAL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D
- UGAHL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D

Hatco Ultra-Glo® Ceramic Dual Strip Heaters provide the ultimate holding power. Increased height improves working clearances and the heat zone blankets the entire holding area. All models include adjustable angle brackets for mounting. Dual mounted strip heaters accommodate wider food holding areas.

Standard features

- Increased height provided with a ceramic heat source improves operational working clearances
- Adaptable to any location and configuration, including back- or front-of-the-house use, open kitchen concepts or buffet lines
- Sturdy continuous extruded aluminum housings eliminate sagging
- Pre-focused heat pattern provides an increased pyramidal dimension, concentrating heat at the edges where heat loss is the greatest
- Available in widths from 18" to 72" (457 to 1829 mm), with or without lights
- Variety of models, configurations and colors provide unlimited flexibility
- Optional coated shatter-resistant incandescent lights enhance brilliant product display while safeguarding food from bulb breakage
- All models include adjustable angle brackets for mounting and leads with 3' (914 mm) conduit whip
- Includes either Attached Control or Remote Control Enclosure with toggle switch(es) and indicator light(s)
- All ceramic heating elements warranted against burnout for one year

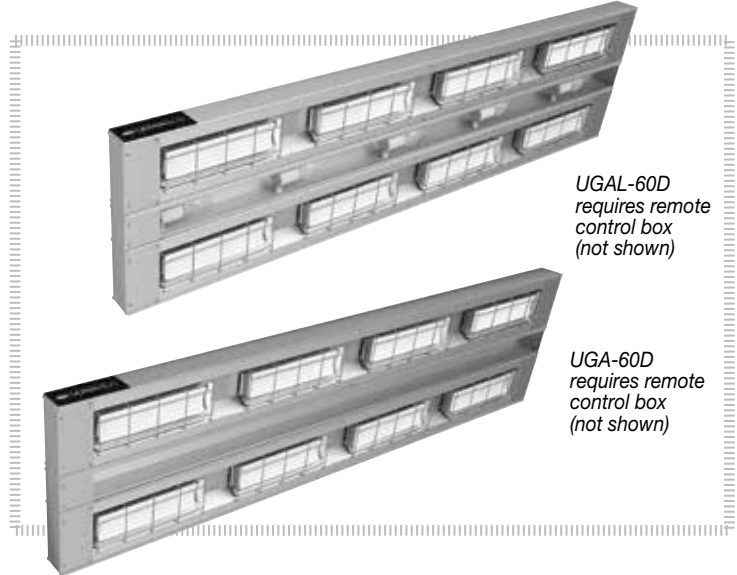

UGAL-60D requires remote control box (not shown)

UGA-60D requires remote control box (not shown)

Options (available at time of purchase only)

- Housing - clear anodized aluminum finish standard
 - 15" 18"
- Designer Color or Gloss finish for Housing – choose below
 Non-standard colors are non-returnable

| | | | |
|--------------------------------------|---------------------------------------|---|---|
| <input type="checkbox"/> Warm Red | <input type="checkbox"/> Black | <input type="checkbox"/> Gray Granite | <input type="checkbox"/> White Granite |
| <input type="checkbox"/> Navy Blue | <input type="checkbox"/> Hunter Green | <input type="checkbox"/> Antique Copper | <input type="checkbox"/> Radiant Red |
| <input type="checkbox"/> Glossy Gray | <input type="checkbox"/> Bold Black | <input type="checkbox"/> Gleaming Gold | <input type="checkbox"/> Brilliant Blue |
- Extra Lamps – Installed (max. two per 12" (305 mm) less one) – one per 12" (305 mm) is standard
- Non-Adjustable Tubular Stands – clear anodized aluminum finish standard
 - 18" (457 mm) 20" (508 mm) 22" (559 mm)
 - 24" (610 mm) 26" (660 mm) – not available for Export
- Optional Designer Color or Gloss Finish
 Non -standard colors are non-returnable

| | | | |
|--------------------------------------|---------------------------------------|---|---|
| <input type="checkbox"/> Warm Red | <input type="checkbox"/> Black | <input type="checkbox"/> Gray Granite | <input type="checkbox"/> White Granite |
| <input type="checkbox"/> Navy Blue | <input type="checkbox"/> Hunter Green | <input type="checkbox"/> Antique Copper | <input type="checkbox"/> Radiant Red |
| <input type="checkbox"/> Glossy Gray | <input type="checkbox"/> Bold Black | <input type="checkbox"/> Gleaming Gold | <input type="checkbox"/> Brilliant Blue |
- Power Leads – extended beyond standard 3' (914 mm) Conduit (specify lead length)
 - 1'-5' (305-1525 mm) 6'-10' (1829-3048 mm)
 - 11'-15' (3352-4572 mm) 16'-20' (4877-6096 mm)
- Remote Box – aluminum finish standard
 - Remote Control Enclosure with Toggle Control and Indicator (in lieu of attached control box) – choose color below if desired (not available on 240V models)
 - Remote Control Enclosure with Toggle Switch, Electronic Infinite Control, Relay and Indicator Light (in lieu of attached control box) – choose color below if desired (Not available for 240V with lights)
- Optional Designer Color or Gloss Finish for chosen Remote Box
 Non-standard colors are non-returnable

| | | | |
|--------------------------------------|---------------------------------------|---|---|
| <input type="checkbox"/> Warm Red | <input type="checkbox"/> Black | <input type="checkbox"/> Gray Granite | <input type="checkbox"/> White Granite |
| <input type="checkbox"/> Navy Blue | <input type="checkbox"/> Hunter Green | <input type="checkbox"/> Antique Copper | <input type="checkbox"/> Radiant Red |
| <input type="checkbox"/> Glossy Gray | <input type="checkbox"/> Bold Black | <input type="checkbox"/> Gleaming Gold | <input type="checkbox"/> Brilliant Blue |

For operation, location and safety information, please refer to the Installation & Operating Manual.



For all units



For all units up to 36" (914 mm)



For all units



HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
 (800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com




Ultra-Glo® Ceramic Dual Infrared Strip Heaters

Models: UGA(L)-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D

UGAH(L)-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D

UGA-D, UGAL-D, UGAH-D, UGAHL-D

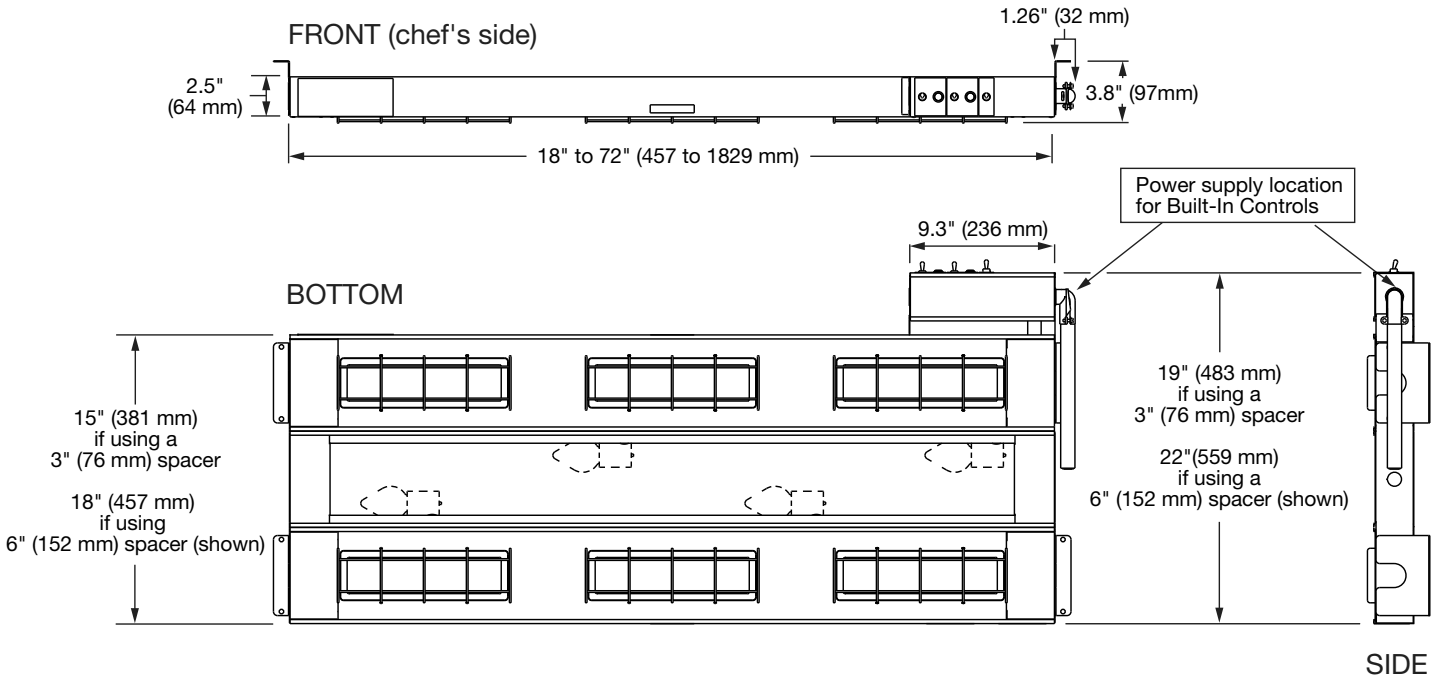

SPECIFICATIONS Ultra-Glo® Dual Ceramic Infrared Strip Heaters

The shaded areas contain electrical information for International models

| Standard Watt | | | | High Watt | | | | Both | |
|---------------|---------------|-------|------|-----------|---------------|-------|------|------------------|---------------------|
| Model | Volts | Watts | Amps | Model | Volts | Watts | Amps | Width | Ship Weight* |
| UGA-18D | 120 | 1000 | 8.3 | UGAH-18D | 120 | 1300 | 10.8 | 18" (457 mm) | 17 lbs. (8 kg.) |
| | 208 | 980 | 4.7 | | 208 | 1350 | 6.5 | | |
| | 240 | 1000 | 4.2 | | 240 | 1300 | 5.4 | | |
| | 220 | 1092 | 5.0 | | 220 | 1260 | 5.7 | | |
| UGA-24D | 120 | 1300 | 10.8 | UGAH-24D | 120 | 1500 | 12.5 | 24" (610 mm) | 20 lbs. (10 kg.) |
| | 208 | 1350 | 6.5 | | 208 | 1500 | 7.2 | | |
| | 240 | 1300 | 5.4 | | 240 | 1500 | 6.3 | | |
| | 220 | 1260 | 5.7 | | 220 | 1512 | 6.9 | | |
| UGA-30D | 120 | 1500 | 12.5 | UGAH-30D | - | - | - | 30" (762 mm) | 26 lbs. (12 kg.) |
| | 208 | 1680 | 8.1 | | 208 | 2250 | 10.8 | | |
| | 240 | 1800 | 7.5 | | 240 | 2250 | 9.4 | | |
| | 220 | 1512 | 6.9 | | 220 | 1890 | 8.6 | | |
| UGA-36D | 208 | 1960 | 9.4 | UGAH-36D | 208 | 2700 | 13.0 | 36" (914 mm) | 31 lbs. (15 kg.) |
| | 240 | 2000 | 8.3 | | 240 | 2600 | 10.8 | | |
| | 220 | 2184 | 9.9 | | 220 | 2520 | 11.5 | | |
| UGA-42D† | 208 circuit 1 | 1120 | 5.4 | UGAH-42D† | 208 circuit 1 | 1500 | 7.2 | 42" (1067 mm) | 32 lbs. (15 kg.) |
| | circuit 2 | 1120 | 5.4 | | circuit 2 | 1500 | 7.2 | | |
| | 240 circuit 1 | 1200 | 5.0 | | 240 circuit 1 | 1500 | 6.3 | | |
| | circuit 2 | 1200 | 5.0 | | circuit 2 | 1500 | 6.3 | | |
| | 220 circuit 1 | 1260 | 5.7 | | 220 circuit 1 | 1680 | 7.6 | | |
| | circuit 2 | 1260 | 5.7 | | circuit 2 | 1680 | 7.6 | | |
| UGA-48D† | 208 circuit 1 | 1470 | 7.1 | UGAH-48D† | 208 circuit 1 | 2025 | 9.7 | 48" (1219 mm) | 40 lbs. (19 kg.) |
| | circuit 2 | 1470 | 7.1 | | circuit 2 | 2025 | 9.7 | | |
| | 240 circuit 1 | 1500 | 6.3 | | 240 circuit 1 | 1950 | 8.1 | | |
| | circuit 2 | 1500 | 6.3 | | circuit 2 | 1950 | 8.1 | | |
| | 220 circuit 1 | 1260 | 5.7 | | 220 circuit 1 | 1890 | 8.6 | | |
| | circuit 2 | 1260 | 5.7 | | circuit 2 | 1890 | 8.6 | | |

* Add 2-8 lbs. (1-3 kg.) to shipping weight depending on size of remote control enclosure ordered.

continued...

† Unit with multiple circuit connections. Each circuit may require a separate circuit breaker.

HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350

www.hatcocorp.com

support@hatcocorp.com



Ultra-Glo® Ceramic Dual Infrared Strip Heaters

Models: UGA(L)-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D
 UGAH(L)-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D

SPECIFICATIONS - continued from previous page
Ultra-Glo® Dual Ceramic Infrared Strip Heaters The shaded areas contain electrical information for International models

| Standard Watt | | | | High Watt | | | | Both | |
|---------------|---------------|-------|------|-----------|---------------|-------|------|------------------|---------------------|
| Model | Volts | Watts | Amps | Model | Volts | Watts | Amps | Width | Ship Weight* |
| UGA-54D† | 208 circuit 1 | 1470 | 7.1 | UGAH-54D† | 208 circuit 1 | 2250 | 10.8 | 54" (1372 mm) | 42 lbs. (20 kg.) |
| | circuit 2 | 1470 | 7.1 | | circuit 2 | 2250 | 10.8 | | |
| | 240 circuit 1 | 1500 | 6.3 | | 240 circuit 1 | 2250 | 9.4 | | |
| | circuit 2 | 1500 | 6.3 | | circuit 2 | 2250 | 9.4 | | |
| | 220 circuit 1 | 1890 | 8.6 | | 220 circuit 1 | 2268 | 10.3 | | |
| | circuit 2 | 1890 | 8.6 | | circuit 2 | 2268 | 10.3 | | |
| UGA-60D† | 208 circuit 1 | 1960 | 9.4 | UGAH-60D† | 208 circuit 1 | 2700 | 13.0 | 60" (1524 mm) | 49 lbs. (23 kg.) |
| | circuit 2 | 1960 | 9.4 | | circuit 2 | 2700 | 13.0 | | |
| | 240 circuit 1 | 2000 | 8.3 | | 240 circuit 1 | 2600 | 10.8 | | |
| | circuit 2 | 2000 | 8.3 | | circuit 2 | 2600 | 10.8 | | |
| | 220 circuit 1 | 2184 | 9.9 | | 220 circuit 1 | 2520 | 11.5 | | |
| | circuit 2 | 2184 | 9.9 | | circuit 2 | 2520 | 11.5 | | |
| UGA-66D† | 208 circuit 1 | 1960 | 9.4 | UGAH-66D† | 208 circuit 1 | 2700 | 13.0 | 66" (1676 mm) | 50 lbs. (23 kg.) |
| | circuit 2 | 1960 | 9.4 | | circuit 2 | 2700 | 13.0 | | |
| | 240 circuit 1 | 2000 | 8.3 | | 240 circuit 1 | 2600 | 10.8 | | |
| | circuit 2 | 2000 | 8.3 | | circuit 2 | 2600 | 10.8 | | |
| | 220 circuit 1 | 2184 | 9.9 | | 220 circuit 1 | 2520 | 11.5 | | |
| | circuit 2 | 2184 | 9.9 | | circuit 2 | 2520 | 11.5 | | |
| UGA-72D† | 208 circuit 1 | 1960 | 9.4 | UGAH-72D† | 208 circuit 1 | 3000 | 14.4 | 72" (1829 mm) | 55 lbs. (25 kg.) |
| | circuit 2 | 1960 | 9.4 | | circuit 2 | 3000 | 14.4 | | |
| | 240 circuit 1 | 2000 | 8.3 | | 240 circuit 1 | 3000 | 12.5 | | |
| | circuit 2 | 2000 | 8.3 | | circuit 2 | 3000 | 12.5 | | |
| | 220 circuit 1 | 2520 | 11.5 | | 220 circuit 1 | 3024 | 13.8 | | |
| | circuit 2 | 2520 | 11.5 | | circuit 2 | 3024 | 13.8 | | |

SPECIFICATIONS
Ultra-Glo® Dual Ceramic Infrared Strip Heaters with lights The shaded areas contain electrical information for International models

| Standard Watt | | | | High Watt | | | | Both | | | |
|-------------------|-------------------|-------------------|------|---------------|-------------------|-------------------|------------|-----------------|---------------------|-------------------|---------------------|
| Model | Volts | Watts | Amps | Model | Volts | Watts | Amps | Width | Ship Weight* | | |
| UGAL-18D | 120 | 1060 | 8.8 | UGAHL-18D | 120 | 1360 | 11.3 | 18" (457 mm) | 17 lbs. (8 kg.) | | |
| | 120/208 | 1040 | 5.2 | | 120/208 | 1410 | 7.0 | | | | |
| | 120/240 | 1060 | 4.7 | | 120/240 | 1360 | 5.9 | | | | |
| | 220 | 1142 | 5.2 | | 220 | 1310 | 6.0 | | | | |
| | 240 | 1060 | 4.4 | | 240 | 1360 | 5.7 | | | | |
| UGAL-24D | 120 | 1420 | 11.8 | UGAHL-24D | 120 | 1620 | 13.5 | 24" (610 mm) | 19 lbs. (9 kg.) | | |
| | 120/208 | 1470 | 7.5 | | 120/208 | 1620 | 8.2 | | | | |
| | 120/240 | 1420 | 6.4 | | 120/240 | 1612 | 7.3 | | | | |
| | 220 | 1360 | 6.2 | | 220 | 1612 | 7.3 | | | | |
| | 240 | 1420 | 5.9 | | 240 | 1620 | 6.8 | | | | |
| UGAL-30D | 120 | 1620 | 13.5 | UGAHL-30D | - | - | - | 30"(762 mm) | 21 lbs. (10 kg.) | | |
| | 120/208 | 1800 | 9.1 | | 120/208 | 2370 | 11.8 | | | | |
| | 120/240 | 1920 | 8.5 | | 120/240 | 2370 | 10.4 | | | | |
| | 220 | 1612 | 7.3 | | 220 | 1990 | 9.0 | | | | |
| | 240 | 1920 | 8.0 | | 240 | 2370 | 9.9 | | | | |
| UGAL-36D | 120/208 | 2140 | 10.9 | UGAHL-36D | 120/208 | 2880 | 14.5 | 36" (914 mm) | 24 lbs. (11 kg.) | | |
| | 120/240 | 2180 | 9.8 | | 120/240 | 2780 | 14.0 | | | | |
| | 220 | 2334 | 10.6 | | 220 | 2670 | 12.1 | | | | |
| | 240 | 2180 | 9.1 | | 240 | 2780 | 11.6 | | | | |
| | UGAL-42D† | 120/208 circuit 1 | 208V | | 1120 | 5.4 | UGAHL-42D† | | | 120/208 circuit 1 | 208V |
| circuit 2 | | 120/208V | 1300 | 6.9 | circuit 2 | 120/208V | | 1680 | 8.7 | | |
| 120/240 circuit 1 | | 240V | 1200 | 5.0 | 120/240 circuit 1 | 240V | | 1500 | 6.3 | | |
| circuit 2 | | 120/240V | 1380 | 5.6 | circuit 2 | 120/240V | | 1680 | 7.8 | | |
| 220 circuit 1 | | 220V | 1260 | 5.7 | 220 circuit 1 | 220V | | 1680 | 7.6 | | |
| circuit 2 | 220V | 1410 | 6.4 | circuit 2 | 220V | 1830 | 8.3 | | | | |
| 240 circuit 1 | 240V | 1200 | 5.0 | 240 circuit 1 | 240V | 1500 | 6.3 | | | | |
| circuit 2 | 240V | 1380 | 5.8 | circuit 2 | 240V | 1680 | 7.0 | | | | |
| UGAL-48D† | 120/208 circuit 1 | 208V | 1470 | 7.1 | UGAHL-48D† | 120/208 circuit 1 | 208V | 2025 | 9.7 | 48" (1219 mm) | 30 lbs. (14 kg.) |
| | circuit 2 | 120/208V | 1710 | 9.1 | | circuit 2 | 120/208V | 2265 | 11.7 | | |
| | 120/240 circuit 1 | 240V | 1500 | 6.3 | | 120/240 circuit 1 | 240V | 1950 | 8.1 | | |
| | circuit 2 | 120/240V | 1740 | 8.3 | | circuit 2 | 120/240V | 2190 | 10.1 | | |
| | 220 circuit 1 | 220V | 1260 | 5.7 | | 220 circuit 1 | 220V | 1890 | 8.6 | | |
| circuit 2 | 220V | 1460 | 6.6 | circuit 2 | 220V | 2090 | 9.5 | | | | |
| 240 circuit 1 | 240V | 1500 | 6.3 | 240 circuit 1 | 240V | 1950 | 8.1 | | | | |
| circuit 2 | 240V | 1740 | 7.3 | circuit 2 | 240V | 2190 | 9.1 | | | | |

*Add 2-8 lbs. (1-3 kg.) to shipping weight depending on size of remote control enclosure.

†Unit with multiple circuit connections. Each circuit may require a separate circuit breaker.

NOTE: UGAHL models that have multiple voltages listed, such as 120/208 or 120/240, have multiple internal circuits. For example, a 120/208V utilizes 120V for the light circuit and 208 volts for the heat circuit(s).

continued...



Ultra-Glo® Ceramic Dual Infrared Strip Heaters

Models: UGA(L)-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D

UGAH(L)-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D

SPECIFICATIONS

Ultra-Glo® Dual Ceramic Infrared Strip Heaters with lights

The shaded areas contain electrical information for international models

| Standard Watt | | | | | High Watt | | | | Both | | |
|---------------|---------|--------------------------------------|--------------|--------------|------------|---------|--|---------------------|---------------------|------------------|---------------------|
| Model | Volts | Watts | Amps | Model | Volts | Watts | Amps | Width | Ship Weight* | | |
| UGAL-54D† | 120/208 | circuit 1 208V circuit 2 120/208V | 1470 1710 | 7.1 9.1 | UGAHL-54D† | 120/208 | circuit 1 208V circuit 2 120/208V | 2250 2490 | 10.8 12.8 | 54" (1372 mm) | 33 lbs. (15 kg.) |
| | 120/240 | circuit 1 240V circuit 2 120/240V | 1500 1740 | 6.3 8.3 | | 120/240 | circuit 1 240V circuit 2 120/240V | 2250 2490 | 9.4 11.4 | | |
| | 220 | circuit 1 220V circuit 2 220V | 1260 1460 | 5.7 6.6 | | 220 | circuit 1 220V circuit 2 220V | 2268 2468 | 10.3 11.2 | | |
| | 240 | circuit 1 240V circuit 2 240V | 1500 1740 | 6.3 7.3 | | 240 | circuit 1 240V circuit 2 240V | 2250 2490 | 9.4 10.4 | | |
| UGAL-60D† | 120/208 | circuit 1 208V circuit 2 120/208V | 1960 2260 | 9.4 11.9 | UGAHL-60D† | 120/208 | circuit 1 208V circuit 2 120/208V | 2700 3000 | 13.0 15.5 | 60" (1524 mm) | 37 lbs. (17 kg.) |
| | 120/240 | circuit 1 240V circuit 2 120/240V | 2000 2300 | 8.3 10.8 | | 120/240 | circuit 1 240V circuit 2 120/240V | 2600 2900 | 10.8 13.3 | | |
| | 220 | circuit 1 220V circuit 2 220V | 2184 2434 | 9.9 11.1 | | 220 | circuit 1 220V circuit 2 220V | 2520 2770 | 11.5 12.6 | | |
| | 240 | circuit 1 240V circuit 2 240V | 2000 2300 | 8.3 9.6 | | 240 | circuit 1 240V circuit 2 240V | 2600 2900 | 10.8 12.1 | | |
| UGAL-66D† | 120/208 | circuit 1 208V circuit 2 120/208V | 1960 2260 | 9.4 11.9 | UGAHL-66D† | 120/208 | circuit 1 208V circuit 2 120/208V | 2700 3000 | 13.0 15.5 | 66" (1676 mm) | 40 lbs. (18 kg.) |
| | 120/240 | circuit 1 240V circuit 2 120/240V | 2000 2300 | 8.3 10.8 | | 120/240 | circuit 1 240V circuit 2 120/240V | 2600 2900 | 10.8 13.3 | | |
| | 220 | circuit 1 220V circuit 2 220V | 2184 2434 | 9.9 11.1 | | 220 | circuit 1 220V circuit 2 220V | 2520 2770 | 11.5 12.6 | | |
| | 240 | circuit 1 240V circuit 2 240V | 2000 2300 | 8.3 9.6 | | 240 | circuit 1 240V circuit 2 240V | 2600 2900 | 10.8 12.1 | | |
| UGAL-72D† | 120/208 | circuit 1 208V circuit 2 120/208V | 1960 2320 | 9.4 12.4 | UGAHL-72D† | 120/208 | circuit 1 208V circuit 2 208V circuit 3 120V | 3000 3000 360 | 14.4 14.4 3.0 | 72" (1829 mm) | 44 lbs. (20 kg.) |
| | 120/240 | circuit 1 240V circuit 2 120/240V | 2000 2360 | 8.3 11.3 | | 120/240 | circuit 1 240V circuit 2 120/240V | 3000 3360 | 12.5 15.5 | | |
| | 220 | circuit 1 220V circuit 2 220V | 2520 2820 | 11.5 12.8 | | 220 | circuit 1 220V circuit 2 220V | 3024 3324 | 13.8 15.1 | | |
| | 240 | circuit 1 240V circuit 2 240V | 2000 2360 | 8.3 9.8 | | 240 | circuit 1 240V circuit 2 240V | 3000 3360 | 12.5 14.0 | | |

*Add 2-8 lbs. (1-3 kg.) to shipping weight depending on size of remote control enclosure.

†Unit with multiple circuit connections. Each circuit may require a separate circuit breaker.

NOTE: UGAHL models that have multiple voltages listed, such as 120/208 or 120/240, have multiple internal circuits. For example, a 120/208V utilizes 120V for the light circuit and 208 volts for the heat circuit(s).

DIMENSIONS

Dual models with Remote Control Enclosure:

18"-72"W x 15"D x 2.5"H (457-1829 x 381 x 64 mm).

Dual models with attached Control Box:

18"-72"W x 18.8"D x 2.5"H (457-1829 x 478 x 64 mm).

Attached Control Box:

9.29" (dual) W x 3.88"D x 2.5"H (147 or 251 x 98 x 64 mm).

▲ Add 3" (76 mm) to depth when ordering dual models with 6" (152 mm) spacer.

MOUNTING REQUIREMENTS

Do not install Ultra-Glo® strip heaters above or around combustible surfaces. Discoloration or combustion could occur.

Ultra-Glo strip heaters must be installed in non-combustible surroundings only.

Mounting requirements for all Ultra-Glo® Dual Element depth models

Must be mounted at least 1" (25 mm) below shelf, and 3" (76 mm) from back wall.

Mounting height for all Ultra-Glo® Dual Element depth models

Standard Watt: 18"-22" (457-559 mm).

High Watt: 22" to 26" (559-660 mm).

Refer to Product Installation and Operating Manual for more detailed information.

PRODUCT SPECS

Ultra-Glo® Dual Ceramic Infrared Strip Heaters

The Dual Ceramic Infrared Strip Heater shall be an Ultra-Glo™, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Foodwarmer shall be an Ultra-Glo Model ... , rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width.

REMOTE CONTROL ENCLOSURES

One Control Box per Strip Heater

| Model | Width of Unit | Depth | Height | Width of Unit (with brackets) |
|---------------|------------------|---------------|-----------------|-------------------------------|
| RMB-3 Series | 5.5" (140 mm) | 3" (76 mm) | 2.5" (64 mm) | 7" (178 mm) |
| RMB-7 Series | 9" (229 mm) | | | 10.5" (267 mm) |
| RMB-14 Series | 14" (356 mm) | | | 15.5" (394 mm) |
| RMB-16 Series | 16" (406 mm) | | | 17.5" (445 mm) |
| RMB-20 Series | 20" (508 mm) | | | 21.5" (546 mm) |
| RMB-22 Series | 22" (559 mm) | | | 23.5" (597 mm) |
| RMB-24 Series | 24" (610 mm) | | | 25.5" (648 mm) |

The Ultra-Glo® shall consist of an aluminum housing, ceramic heating element, 3' conduit whip and angle brackets for mounting. Remote Control Enclosure is recommended. Mounting heights between 18" to 22" (457-559 mm) dual standard (low) watt, 22" to 26" (559-660 mm) dual high watt.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350

www.hatcocorp.com | support@hatcocorp.com