

XBC-KZ10 Block Camera



Part No.
EM14463



Revision History

Date	Version	Contents
2017.09.01	V1.0.0	Release Document
2017.09.28	V2.0.0	Release Document
2017.10.17	V3.0.0	Release Document
2017.12.26	V4.0.0	Release documents
2018.02.13	V5.0.0	Release documents



Table of Contents

TABLE OF CONTENTS	-----	3
FEATURES	-----	4
SPECIFICATIONS	-----	5
OSD & MENU	-----	7
DIMENSION	-----	13
INTERFACE	-----	14
FUNCTIONS	-----	16
COMMAND LIST	-----	18



Features

- This camera uses a 1/3" 2.1M Progressive CMOS Image Sensor that supports FULL HD (high definition) to produce high-quality images.
- Using progressive scan, images with a wide dynamic range can be obtained with the newly developed image signal processor (Wide Dynamic Range function). Furthermore, it is possible to automatically switch to this Wide Dynamic Range function, which enables you to obtain optimal images ranging from the dark areas of a subject to the light areas.
- The camera is equipped with a bright zoom lens with 10× optical zoom and F1.6 aperture (optical zoom + digital zoom = 120×)
- Low-noise images can be obtained even in low-light environments using the Noise Reduction function.
- Video signals can be output as digital only. Depending on register settings, you can select from a variety of digital output methods: 1080p/60, 1080p/50, 1080p/30, 1080p/25, 720p/60, 720p/50, 720p/30, 720p/25.
- An infrared (IR) Cut-Filter can be disengaged from the image path for increased sensitivity in low light environments. The ICR will automatically engage depending on the ambient light, allowing the camera to be effective in day/night environment.
- A Privacy Zone Masking function (max. 16 blocks) is available.
- A Motion Detection function is available.
- A title composed of up to 14 lines can be set for displaying on the screen. 20 characters can be used on one line.
- Support 256 internal zoom/focus presets.
- Output format
HD-SDI / LVDS / CVBS
- UTC communication is available.
- LVDS output mode can be set.
Single / Dual output

Specifications

Format	
Video System	
Image Sensor	1/2.8" Exmor CMOS image sensor
Effective Pixels	2.38 million pixels (CVBS 760H)
Output Format	1080p/60, 1080p/50, 1080p/30, 1080p/25, 720p/30, 720p/25
Sync System	Internal
CVBS scale	16:9 / 4:3
LVDS mode	Single / Dual
Video Output	CVBS / LVDS / HD-SDI CVBS / HD-SDI
Min. illumination	
Day	0.5 Lux @ F1.6
Night (IR-cut filter on)	0.1 Lux @ F1.6
S/N ratio (AGC off, DSS off)	More than 52 dB
Optical Lens	
Zoom Magnification	X10
Practical f-value	5.1 to 51.0 mm
Practical Horizontal-Angle	54.0°(W) ~ 4.9°(T)
Practical Vertical Angle	31.0°(W) ~ 4.0°(T)
Practical Diagonal Angle	68.0°(W) ~ 6.7°(T)
F-value	F1.6(W) ~ F1.8(T)
Zoom	
Maximum Zoom Ratio	x1 ~ x120
Optical Zoom Ratio	x1 ~ x10
Digital Zoom Ratio	x1 ~ x12
Digital Pan/Tilt	-
Speed (Focus Tracking On)	2.5 ~ 30 sec
(Focus Tracking Off)	2.0 sec
Focus	
Control Mode	Auto / Manual / Interval / One Push (=Zoom Trigger)
Focal Range	Infinity ~ 1.0m(T) ~ 0.01m(W)
IR correction	Standard / IR Light
Day & Night	
D&N mode	Auto / Day (Color) / Night (BW) / External-H / External-L
Night Color	Off/On
White Balance	Auto / ATW / Indoor / Outdoor / Push / Manual
Exposure	
AE mode	Auto / Shutter Priority / Iris Priority / Bright / Manual
Brightness	1 ~ 20
AGC Limit	Off ~ 58dB
Manual Shutter	X32 ~ x2, 1/25(30)/1/50(60) ~ 1/30000
Manual AGC	Off ~ 58dB
Manual Iris	F1.2 ~ F19, Close
Sens-Up	Off ~ 32fields
OSD	Menu OSD (English / Japanese / Russian / Spanish / German / France / Portuguese)




Format	
DSP functions	
Digital Slow Shutter	Max. 32 fields
Image Freeze	Off / On
Image Reverse (E-FLIP)	Off / Horizontal(mirror) / Vertical / H+V(180° flip)
Privacy Masking	Spherical Privacy <ul style="list-style-type: none"> - 16-zone - Interlock / Non-Interlock Mask - 14 mask color selectable, semi-transparency - Pan(0°~360°), Tilt(+90°~-90°)
Title Display	10 characters (display position selectable)
Motion Detect	4-Zone <ul style="list-style-type: none"> - Alarm output : OSD / Serial Communication
D-WDR	Off / Low/Middle/High
WDR	WDR (Low/Middle/High) WDR (Low/Middle/High)
BLC	Off / On, Area selectable
HLC	Off / 0 ~ 20, Color selectable
AGC	Max. 58dB
Sharpness	Adjustable(0~10)
3DNR	On / Off / Auto
2DNR	Off / On
Defog	Off / Low / Middle / High
Gamma	0.45/0.50/0.55/0.60/0.65/0.70/0.75
Lens Shading	Off / Low / Middle / High
Defect Detection	Support
Position Preset	Non-volatile 256 position(zoom/focus) presets.
Communication (UART)	
Camera ID	0~255
Remote Control	RS-232 TTL +3.3V (+5.0V Compatible)
Control Protocol	VISCA /Pelco-D/Pelco-P : automatically detection
Communication Speed	2400/4800/9600(default)/19200/38400/57600/115200bps selectable
Communication (UTC)	
Control Protocol	HD-TVI :HIKVISION-C, PELCO-C : automatically detection
Power	
Supply Voltage	DC 12V (+7.0V ~ +15V)
Supplied Current	Max. 380mA (12V Input)
Consumption max.	Max. 4.4W (12V Input)
Physical	
Dimension (WxHxD) [mm]	41.6x45x61.6 41.6x45x61.6
Weight	210g 210g
Temperature& Humidity	
Operating condition	Temperature (-10°C ~ 50 °C), Humidity (20% ~ 95%)
Storage condition	Temperature (-20°C ~ 60 °C), Humidity (20% ~ 80%)

OSD & Menu

MAIN MENU


FOCUS	[]
EXPOSURE	[]
WHITE BALANCE	[]
WDR/BLC	[]
DAY&NIGHT	[]
IMAGE	[]
SPECIAL	[]
FACTORY DEF	OK
EXIT	



UP/DOWN : move cursor
 LEFT/RIGHT : change data, enter to submenu
 SET (or IRIS OPEN) : used for SET key

- ▶ **FACTORY DEF** : factory default setting
 It changes the entire menu in the initial state except "SYSTEM" menu items.

SIZE & POSITION



RETURN : [SET] KEY

- Adjust SIZE or POSITION.
- CAM TITLE POSITION MENU
 - CAM ID POSITION MENU
 - ZOOM MAG POSITION MENU
 - PRIVACY MASK PAN/TILT POSITION MENU
 - PRIVACY MASK SIZE MENU

FOCUS

AF MODE	AUTO
D-ZOOM	ON
ZOOM START	x1
ZOOM STOP	x120
ZOOM SPEED	6
FOCUS LIMIT	1M
AF INTERVAL	1min
HOME POSITION	OFF
INITIAL	OK
RETURN	

- ▶ **AF MODE** : AUTO/ONE SHOT/INTERVAL/MAMUAL
- ▶ **DIGITAL ZOOM** : OFF/ON
- ▶ **ZOOM START/STOP**
- ▶ **ZOOM SPEED** : 0~7
- ▶ **FOCUS LIMIT** : 1CM-INF
- ▶ **IR CORRECT** : STANDARD/IR LIGHT
- ▶ **AF INTERVAL** : 1min~10min
- ▶ **HOME POSITION** : OFF/ON




COLOR

BY_GAIN-	80
BY_GAIN+	58
RY_GAIN-	68
RY_GAIN+	44
BY_HUE-	224
BY_HUE+	232
RY_HUE-	0
RY_HUE+	128
RED GAIN	60
GREEN GAIN	50
BLUE GAIN	60
RESET	←
RETURN	

Adjust Camera Color Gain

- ▶ BY-GAIN ~ RY_HUE, R/G/B-GAIN : adjust color
GAIN : Chroma (saturation) value
HUE : Hue

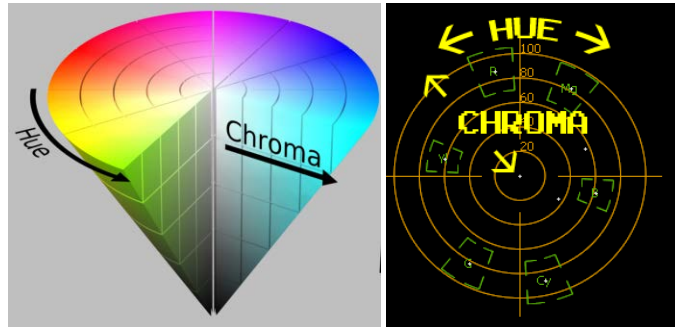

(!!!) These values are NOT initialized.

COM

CAM ID	1
BAUDRATE	9600
APPLY	←
RETURN	

Adjust COM

- ▶ CAM ID : 0~255
- ▶ BAUDRATE: 2400/4800/9600/19200/38400/57800/115200 bps
- ▶ APPLY : apply the <CAM ID>,<BAUDRATE> condition.

DAY&NIGHT

MODE		AUTO
DWELL TIME		5sec
DAY->NIGHT		28
NIGHT->DAY		4
IR SMART		0
INITIAL	OK	
RETURN		

- ▶ MODE : AUTO/DAY/NIGHT/EXT-H/EXT-L
- ▶ DWELL TIME : 0~20sec
- ▶ DAY->NIGHT : 1~28
- ▶ NIGHT->DAY : 0~27
- ▶ NIGHT COLOR : BW/COLOR
Select color at night condition.
- ▶ IR SMART : 0~20

IMAGE

SHARPNESS		8
GAMMA		0.50
MIRROR	OFF	
FREEZE	OFF	
D-WDR	OFF	
DEFOG		[←]
DNR		[←]
DIS		[←]
EFFECT		[←]
INITIAL	OK	
RETURN		

- ▶ SHARPNESS : 0~10
- ▶ GAMMA : 0.45/0.50/0.55/0.60/0.65/0.70/0.75
- ▶ MIRROR : OFF/H-MIR/V-MIR/HV-MIR
- ▶ FREEZE : OFF/ON
- ▶ D-WDR : OFF/LOW/MIDDLE/HIGH

DEFOG

MODE ON/OFF		ON
MODE		AUTO
LEVEL		MIDDLE
RETURN		

Adjust Defog

- ▶ MODE ON/OFF : OFF/ON
- ▶ MODE : AUTO/MANUAL
- ▶ LEVEL : LOW/MIDDLE/HIGH



DNR

MODE
RETURN

1

▶ MODE : OFF/1~5

DIS

MODE
RANGE
FILTER
AUTO C
RETURN

OFF
30%
MIDDLE
HALF

Adjust DIS

- ▶ MODE : OFF/ON
- ▶ RANGE : 10%/20%/30%
- ▶ FILTER : LOW/MIDDLE/HIGH
- ▶ AUTO C : OFF/HALF/FULL

EFFECT

PIC.EFFECT
HR MODE
RETURN

OFF
OFF

- ▶ PIC.EFFECT : OFF/NEGATIVE/BW
- ▶ HR MODE : OFF/ON

```

SPECIAL

CAM TITLE      [ ← ]
DISPLAY        [ ← ]
PRIVACY        [ ← ]
MOTION         [ ← ]
SYSTEM         [ ← ]
INITIAL        OK
RETURN

```

- ▶ CAM TITLE : edit camera title
- ▶ DISPLAY : select display mode
- ▶ PRIVACY : adjust privacy mask status
- ▶ MOTION : adjust motion detect function
- ▶ SYSTEM : system setting
- ▶ INITIAL : (!!!) SYSTEM menu is NOT initialized.


```

CAM TITLE
↓
TITLE: _ _ _ _ _

ABCDEFGHIJKLMNPO
QRSTUVWXYZ! - ( ) [ ]
0123456789? * : " / .
SPA>>          <<BAK

DISPLAY        OFF
LOCATION        ←
RETURN

```

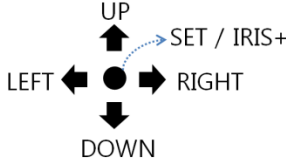- 
- [Title Edit]
UP/DOWN : move cursor up&down
LEFT/RIGHT : move cursor left&right
SET (or IRIS OPEN) : select cursor character.
- ▶ DISPLAY : OFF/ON, enable/disable title display
 - ▶ LOCATION : adjust TITLE display position

```

DISPLAY

CAM ID DISP    ON
CAM ID POS     ←
ZOOM MAG DISP  ON
ZOOM MAG POS   ←
INITIAL        OK
RETURN

```

- ▶ CAM ID DISP : OFF/ON, Camera ID display mode
- ▶ CAM ID POS : Camera ID display position setting
- ▶ ZOOM MAG DISP : OFF/ON
- ▶ ZOOM MAG POS : Zoom ration display position setting



PRIVACY

MODE	ON
ZONE NO	1
DISPLAY	ON
P/T LOCK	ON
POSITION	ON
ZONE SIZE	[↵]
COLOR	BLACK
TRANSPARENCY	25%
ZONE RESET	[↵]
INITIAL	OK
RETURN	

- ▶ **MODE** : OFF/ON, Privacy mask enable/disable
- ▶ **ZONE NO** : 1~24, Privacy mask zone number
- ▶ **ZONE DISPLAY** : OFF/ON, current mask zone display on/off.
- ▶ **P/T INTERLOCK** : interlocking Pan & Tilt.
- ▶ **POS.ZOOM** : select zoom position.
[LEFT] zoom out, [RIGHT] zoom in
- ▶ **POS.PAN/TILT** : select pan/tilt position.(if P/T INTERLOCK OFF)
- ▶ **ZONE SIZE** : select mask zone width & height.
- ▶ **COLOR** : select mask zone color, BLACK,GRAY1~6,WHITE,RED, GREEN,BLUE,CYAN,YELLOW,MAGENTA
- ▶ **TRANSPARENCY** : select transparent level. OFF/25%/50%/75%
- ▶ **ZONE RESET** : reset the mask size, zoom, pan, tilt position.

MOTION

MODE	ON
ZONE NO	1
ZONE DETECT	ON
X-POSITION	1
Y-POSITION	1
X-SIZE	58
Y-SIZE	32
SENSITIVITY	MIDDLE
ALARM MODE	TEXT
INITIAL	OK
RETURN	

- ▶ **MODE** : OFF/ON, Enable/disable the Motion Detection.
- ▶ **ZONE NO** : 1~4, select the motion detection window.
- ▶ **ZONE DETECT** : OFF/ON, select the detection mode of current zone.
- ▶ **X-POSITION** : adjust motion detect zone X-position.
- ▶ **Y-POSITION** : adjust motion detect zone Y-position.
- ▶ **X-SIZE** : adjust motion detect zone X-size.
- ▶ **Y-SIZE** : adjust motion detect zone Y-size.
- ▶ **SENSITIVITY** : 0~10, select the motion detect sensitivity level.
- ▶ **ALARM MODE**: OFF/OSD/TEXT/OSD+TEXT, select the display method if motion is detected.

SYSTEM

LANGUAGE	ENGLISH
FRAMERATE	1080_60p
DVR	STANDARD
APPLY	[↵]
CVBS	16:9
LVDS MODE	SINGLE
DEFECT DET	[↵]
COLOR	[↵]
COM	[↵]
RETURN	

- ▶ **LANGUAGE** : English / Japanese / Russian / Spanish / German /France/ Portuguese
- ▶ **FRAMERATE** : 1080_60p/1080_50p/1080_30p/1080_25p/720_60p/720_50p/720_30p/720_25p
- ▶ **DVR** : STANDARD/HIK 3.1.2/HIK 3.0.4/WEBGATE/RAYSHARP/CVBS/ETC
- ▶ **APPLY** : apply the <FRAMERATE>,<DVR> condition.
- ▶ **CVBS** : 16:9 / 4:3, select CVBS scale
- ▶ **LVDS MODE** : SINGLE/DUAL
- ▶ **DEFECT DET** : defect detection
- ▶ **COLOR** : Adjust R/B gain, R/B hue
- ▶ **COM** :


(!!!) All of the SYSTEM menu items are NOT initialized.

COLOR

BY_GAIN-	80
BY_GAIN+	58
RY_GAIN-	68
RY_GAIN+	44
BY_HUE-	224
BY_HUE+	232
RY_HUE-	0
RY_HUE+	128
RED GAIN	60
GREEN GAIN	50
BLUE GAIN	60
RESET	↩
RETURN	

Adjust Camera Color Gain

- ▶ BY-GAIN ~ RY_HUE, R/G/B-GAIN : adjust color
- GAIN : Chroma (saturation) value
- HUE : Hue

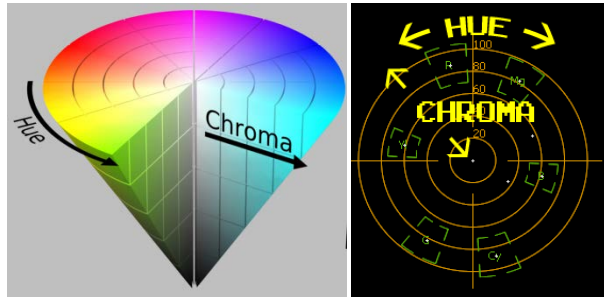

(!!!) These values are NOT initialized.

COM


CAM ID	1
BAUDRATE	9600
APPLY	↩
RETURN	

Adjust COM

- ▶ CAM ID : 0~255
- ▶ BAUDRATE: 2400/4800/9600/19200/38400/57800/115200 bps
- ▶ APPLY : apply the <CAM ID>,<BAUDRATE> condition.


Dimensions

x10 zoom module

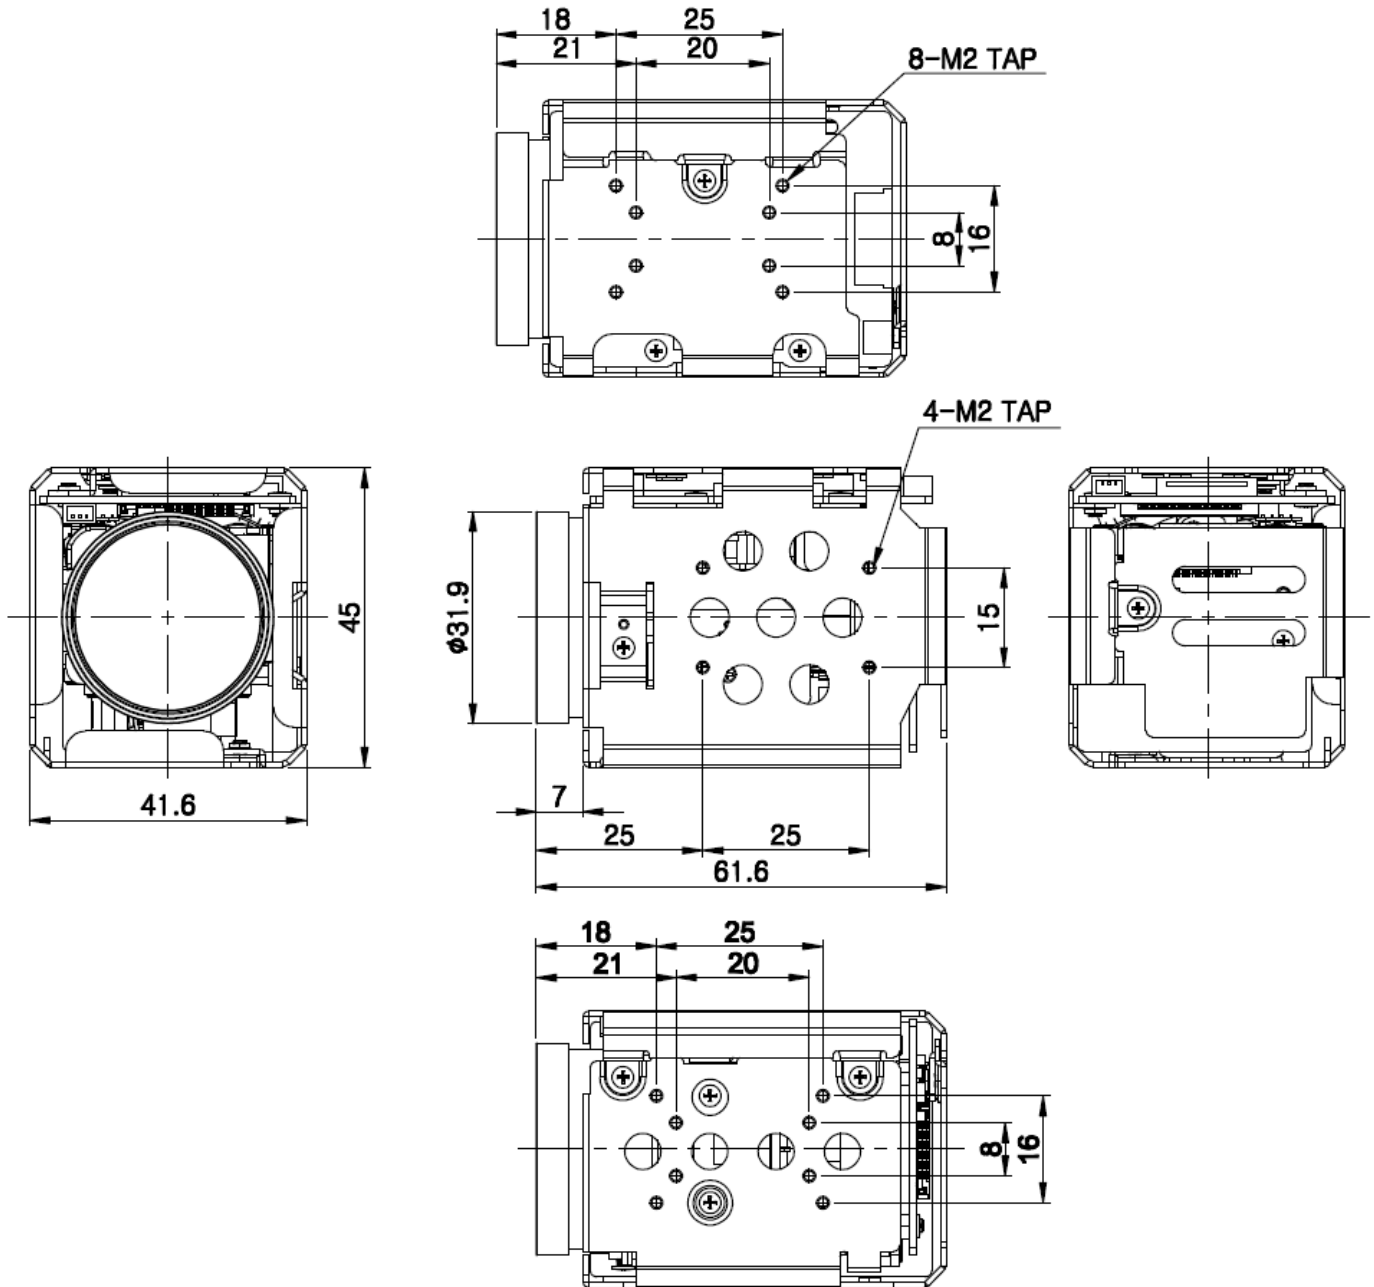

Interface

PIN Assign (10x zoom module)

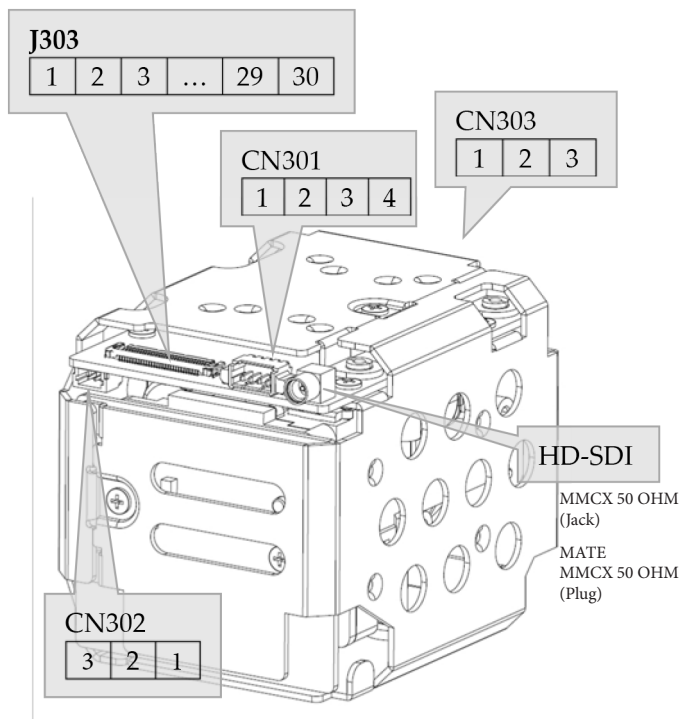

CN301 (CVBS) / JST : MOLEX 53261-0471

NO	Name	Description
1	POWER IN	+12V IN
2	GND	
3	VIDEO	CVBS OUTPUT
4	AD_KEY	AD_KEY

Molex 51021-0400 4 position crimp housing,
Molex 50079-8100 Female crimp x4

CN302 (RS-232 TTL) / JST : SM03B-SRSS-TB

NO	Name	Description
1	GND	
2	RXD	CMOS 3.3V Read Data
3	TXD	CMOS 3.3V Send Data

SHR-03V-S-B Female Plug
SSH-003T-P0.2 Crimp Contact x3cv

CN303 (External D&N) / JST : SM03B-SRSS-TB

NO	Name	Description
1	Ext_D&N	External D&N Input
2	GND	GND
3	+3.3V	+3.3V Out (For Sensor)

J303 (FFC Option) / KEL Co. USL00-30L-C

NO	Name	Description
1	TX_OUT3+	
2	TX_OUT3-	
3	TX_CLKOUT+	
4	TX_CLKOUT-	
5	TX_OUT2+	
6	TX_OUT2-	
7	TX_OUT1+	
8	TX_OUT1-	
9	TX_OUT0+	
10	TX_OUT0-	
11	GND	
12	TXD	CMOS 3.3V Send Data
13	RXD	CMOS 3.3V Read Data
14	+12V DC	
15	+12V DC	
16	+12V DC	
17	+12V DC	
18	+12V DC	
19	GND	
20	GND	
21	TX_OUT7+	Single out mode : open
22	TX_OUT7-	Single out mode : open
23	TX_OUT6+	Single out mode : open
24	TX_OUT6-	Single out mode : open
25	NC/CVBS	
26	RESET_IN	Reset : Low(GND),Normal(1.8V)
27	TX_OUT5+	Single out mode : open
28	TX_OUT5-	Single out mode : open
29	TX_OUT4+	Single out mode : open
30	TX_OUT4-	Single out mode : open

CN304 (1.25mm Header Option)

Molex : 53261-0771

NO	Name	Description
1	DC_IN	+12V DC
2	GND	
3	TXD	CMOS 3.3V Send Data
4	RXD	CMOS 3.3V Read Data
5	TVI_OUT	HD-TVI / AHD Video Output
6	GND	
7	CVBS	CVBS Output or AD_KEY


NOTE1 :

It can be used for any other purpose.

However, it is fixed at the factory.

Therefore, you should contact us in order to be used for any other purpose.

LVDS Interface

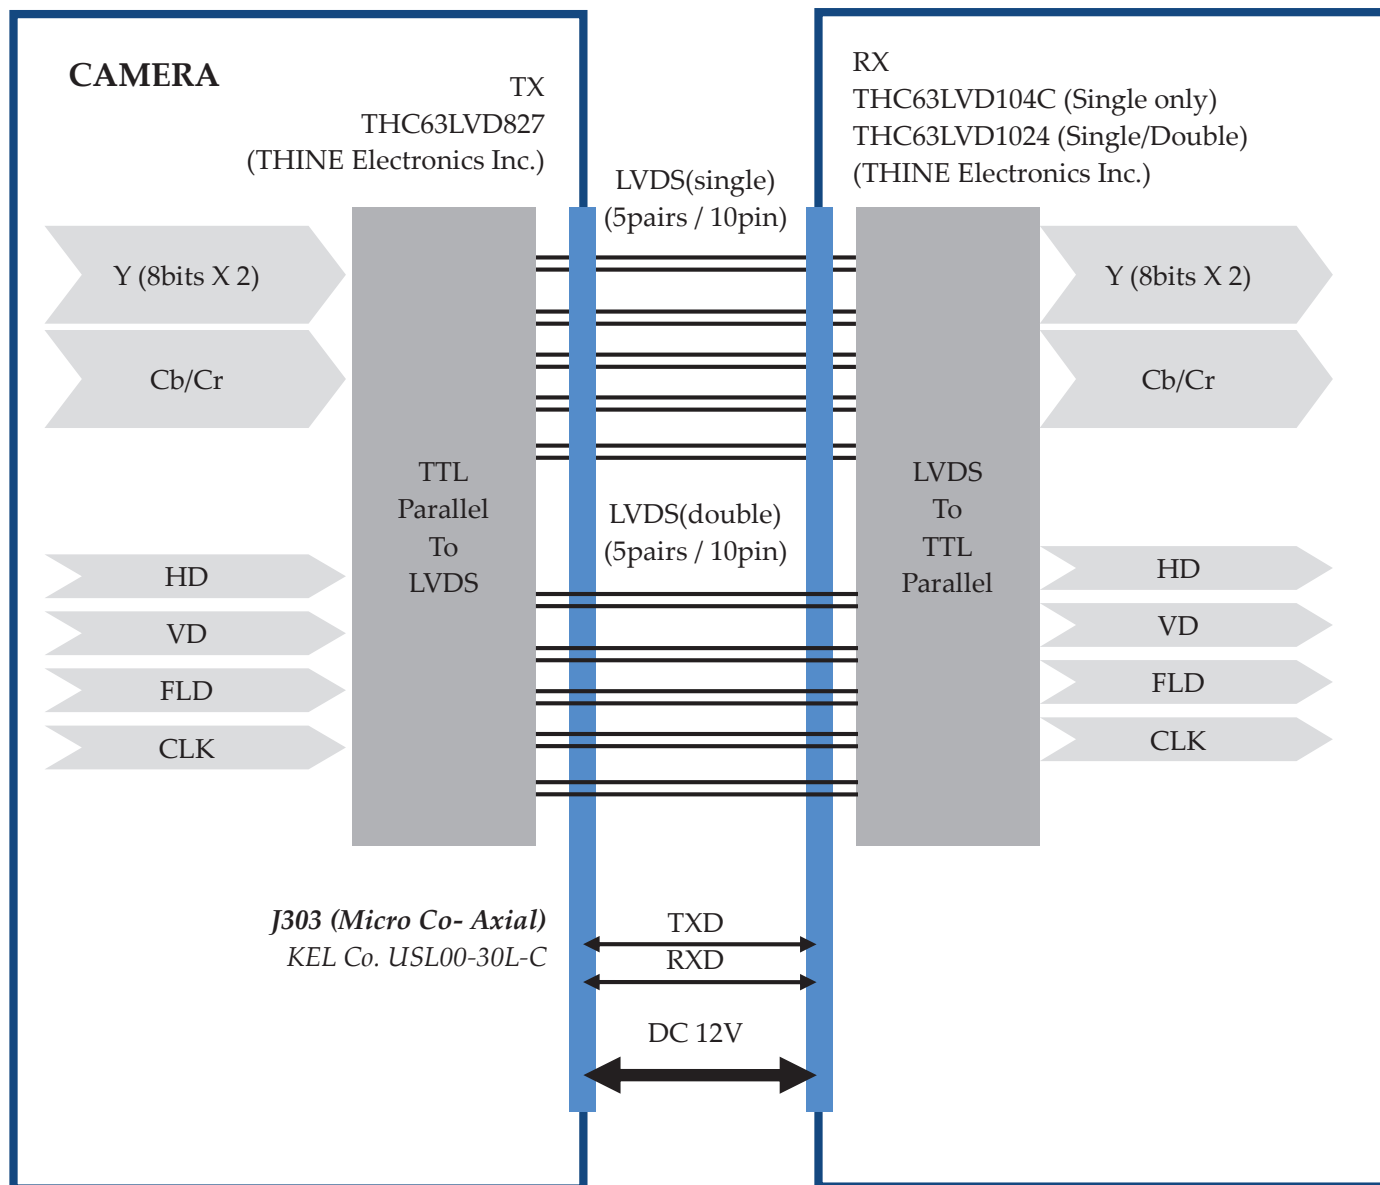

HD Digital Video Sync Signal
 74.125MHz

Recommended LVDS receiver IC
 (1) Single Only : THC63LVD104C
 (2) Single or Double : THC63LVD1024

Select LVDS output mode

(1) MENU

SPECIAL -> SYSTEM -> LVDS MODE : SINGLE/DUAL

(2) VISCA protocol

8x 01 04 24 74 0p 0q FF : pq=00 (single) / pq=01 (double)

(caution) If the frame rate is 25 fps / 30 fps, it works as SINGLE even if LVDS MODE is set to DUAL.


However, if the frame rate is 50 fps / 60 fps, LVDS MODE must be set to DUAL to operate as DUAL.

Functions

Auto Focus Near Limit

You can set the minimum focus distance from 1cm(or 10cm) to infinite. It is available only at high magnification zoom position.

This is called by FOCUS LIMIT or NEAR LIMIT or M.O.D (Minimum object distance). This is mostly used to avoid focusing on objects of close range.

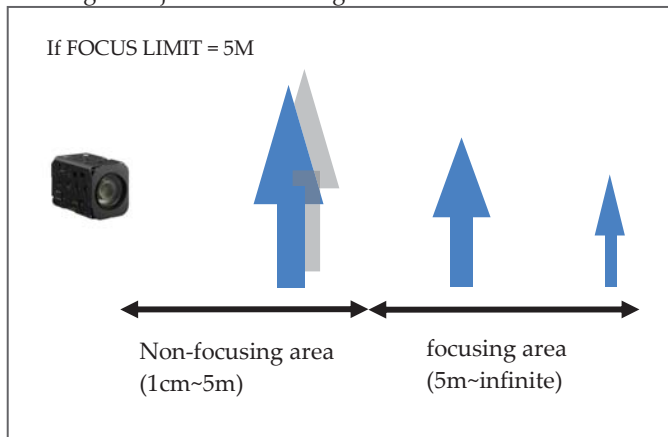

Auto Focus Mode

• AUTO

When a change in the image is detected, the AF operation is automatically performed.

• INTERVAL

It is used for AF movements carried out at particular intervals.

• MANUAL

Adjust zoom and focus manually.


• ONESHOT

When the zoom is changed, auto focus is executed only once. The AF range is from FOCUS LIMIT to infinity.

It is called by "ONE PUSH" or "ZOOM TRIGGER" mode.

• PRESET (*3)

Always focus on the specified subject. When the zoom is changed, auto focus is executed only once. The AF range (=PRESET MARGIN) is limited to a specific range.

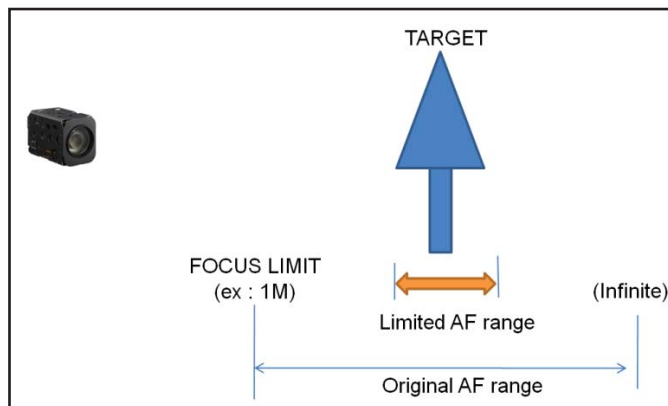


- The PRESET AF mode is useful when you need to focus only on objects of a specific distance that require little PAN / TILT operation after installing the camera.

- The PRESET MARGIN is the AF operating range at the maximum zoom scale. This range is automatically adjusted according to the zoom magnification

< PRESET setting method - 1 >

- (1) Enter MENU
- (2) Change AF mode to PRESET
- (3) Enter PRESET POSITION menu
- (4) Move to maximum zoom scale (OK is displayed on the screen)
- (5) Adjust focus
- (6) Exit PRESET POSITION menu
- (7) Adjust PRESET MARGIN data (4~255)

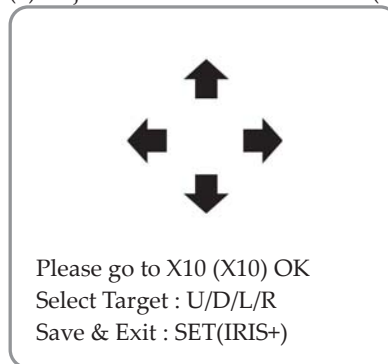

< PRESET setting method - 2 >

KT_PresetAF	Disp. Setting OSD	8x 01 70 02 00 FF
	Cancel & Exit	8x 01 70 02 01 FF
	Save & Exit	8x 01 70 02 02 FF
	Test PRESET	8x 01 70 02 10 FF
	Set Preset AF Range	8x 01 70 03 0p 0q FF

(1) If you want to output the PRESET POSITION setting screen, send SETTING OSD command.

(2) To save the current zoom and focus position in the PRESET position, send the SAVE & EXIT command. To end without saving, send CANCEL&EXIT command.

(3) To save the current zoom and focus position to PRESET position without outputting PRESET POSITION menu, send SAVE & EXIT command.

Automatic Exposure Mode

- Full Auto mode
Iris, Gain, Shutter speed can be set automatically.
- Shutter Priority mode
Variable shutter speed : 1/1(X32)~1/30000
Auto Iris & Gain
- Iris Priority mode
Variable Iris : F1.6 ~ Close, 14steps
Auto Gain & Shutter
- Manual mode
Variable Iris/Shutter/Gain
- Bright mode
Variable Iris & Gain, F1.6~58dB
Shutter speed is maintained at the speed in FULL AUTO or SHUTTER PRIORITY mode.
The "BRIGHT" mode can be switched to "Full Auto" or "Shutter priority" mode only.

(NOTE) See "Command Setting Values"

Exposure Compensation

It is a function which offsets the internal reference brightness level used in the AE mode.

CAM_ExpComp	8x 01 04 4E 00 00 0p 0q	pq=compensation level FF
-------------	-------------------------	-----------------------------

(NOTE) See "Command Setting Values"

Wide Dynamic Range (WDR)

Images with WDR are produced by combining long-exposure signals(normal shutter) with the signal of the high-intensity portions obtained a short-exposure (high-speed shutter).

(NOTE1) When CVBS is connected, WDR automatically turns off and Digital WDR operates.



WDR OFF

WDR ON

High-Light Compensation (HLC)

It's ability to reverse bright points in the picture to black. As an effective approach to recognize vehicle plate number at night, HLC function can detect any spotlight diffused by object-vehicle and compensate it for obtaining clearer image.



HLC OFF

HLC ON

Spot AE

- Available in Full Auto AE mode.
- A particular section of the subject can be designated, and then that portion of the image can be weighted and a value computed so that iris and gain can be optimized to obtain an image.

0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
1															
2															
3															
4															
5															
6															
7															
8															
9															
A															
B															
C															
D															
E															
F															

CAM_SpotAE	On	8x 01 04 59 02 FF	Spot AE mode
	Off	8x 01 04 59 03 FF	
	Position	8x 01 04 29 0p 0q 0r 0s FF	pq:X(0-F), rs:Y(0-F)

Noise Reduction

- 3D-NR
- 2D-NR

Defog

- Sharpens cloudy images such as fog.

Slow AE Response

The Slow AE Response function allows you to reduce the exposure response speed.

(example) If the headlights of a car are caught by the camera, the camera automatically adjusts the exposure so that it can shoot a high-intensity subject. Since AE responds slowly, it can be prevent images from being shot.

CAM_AE_Response	8x 01 04 5D pp FF	pp: 01 to 30 default 01
-----------------	-------------------	----------------------------

Digital Image Stabilizer

This function reduces image blurring caused by vibration

- **RANGE** : Set the compensation range. Up to 30% of the input image range is used, and digital zoom is required up to 1.4 times according to the setting.
- **FILTER**: Correction filter for the worst case of the image (built-in Hold filter). If you increase the setting value, the correction becomes less. If you decrease the setting value, the correction becomes better. However, a malfunction may occur in a moving subject or a low-illuminance / no-pattern image.
- **AUTO C** : Auto Centering to distinguish camera shake from PANNING. It compensates for high frequency vibrations such as tremor and allows the screen to move naturally to the camera's PANNING. In the case of FULL, the camera always corrects the direction in which the image is positioned at the center of the image. In the case of HALF, the center of the correction area is completely corrected (PANNING is ignored) and only the periphery is centered.



(before)

(after)

Home Position Mode

After power on, you can choose whether to move to the last position before power off or to x1 position.

KT_HomePowerOn	On	8x 01 70 24 02 FF	Moving to x1 position
	Off	8x 01 70 24 03 FF	Move to final position before power off

Memory Preset

16 sets of camera shooting conditions can be stored and recalled.

- Zoom Position
- Digital Zoom Mode
- Focus Mode
- AE mode
- Shutter control parameters
- Bright
- Iris
- Gain
- Exposure Compensation mode
- Exposure Level
- Backlight Compensation mode
- Auto Slow Shutter On/Off
- White Balance mode
- Red/Blue Gain
- Aperture Control
- ICR mode
- Defog
- WDR mode

Custom Preset

As with the position preset function, the camera shooting conditions can be saved and recalled. The settings are recalled when the power is turned on.

- The above memory preset contents
- Privacy mask
- Motion detect
- Title
- Flip, mirror, negative, BW, Gamma, DNR, DIS, AF controls, camera ID, HLC, ETC.

User memory Area

You can use up to 16 bytes to store data : such as camera number.

Position Preset

The current zoom / focus position can be stored in the internal memory and moved to that position if necessary. A total of 256 locations can be stored.

KT_ZoomFocusPreset	Set	8x 01 70 3F 01 0p 0q 0r FF	pqr : preset Number (0x000-0x0FF)
	Recall	8x 01 70 3F 02 0p 0q 0r FF	
	Clear	8x 01 70 3F 03 0p 0q 0r FF	
	Clear All Preset	8x 01 70 3F 0F 00 00 00 FF	Clear all preset data
KT_ZoomFocusPresetInq	8x 09 703F 0n 0n 0n FF	y0 50 0v 0z 0z 0z 0z 0f 0f 0f 0f FF	nnn: preset number (0x000-0x0FF) v : 1(saved), 0(empty) zzzz : zoom position ffff : focus position




Day & Night Setting

• AUTO Mode

If the current illumination is darker than the ICR ON level, the IR cut filter is removed. If it is brighter than the ICR OFF level, the IR cut filter is enabled.

ICR ON level = Day To Night level

ICR OFF level = Night To Day level

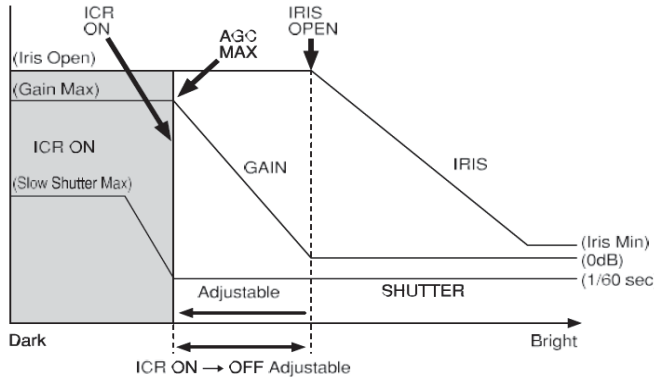

• DAY Mode (=ICR OFF fixed)

It always maintains the DAY (color) state regardless of the current illumination.

• NIGHT Mode (=ICR ON fixed)

It always maintains the NIGHT (B/W) state regardless of the current illumination.

• EXT-L/H Mode

DAY / NIGHT is determined according to the external input signal.

In EXT-H mode, when the input signal level is greater than DAY TO NIGHT LEVEL, it switches to NIGHT.

In EXT-L mode, if the input signal level is lower than DAY TO NIGHT LEVEL, it switches to NIGHT.

KT_DayNightMode ^(*)	Auto	8x 01 70 04 00 FF
	Day	8x 01 70 04 01 FF
	Night	8x 01 70 04 02 FF
	Ext-High	8x 01 70 04 03 FF
	Ext-Low	8x 01 70 04 04 FF
KT_ExtICRthreshold ^(*)	Day->Night(EXT-H)	8x 01 70 05 10 0p 0q FF
	Night->Day(EXT-H)	8x 01 70 05 11 0p 0q FF
	Day->Night(EXT-L)	8x 01 70 05 20 0p 0q FF
	Night->Day(EXT-L)	8x 01 70 05 21 0p 0q FF

Motion Detect Function

Motion Detect functions instructs the camera to detect movement within monitoring area and then send an alarm signal automatically.


◇ Frame

You can set up to 4-frames

Each frame can be set up :

Using VISCA : 16 (horizontally)×8 (vertically) blocks

Using MENU : 60 (horizontally)×34 (vertically) blocks

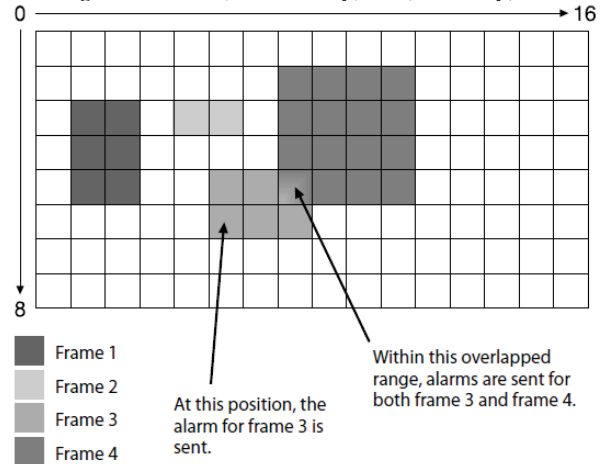


◇ Sending Alarms

• When motion is detected, the Alarm Replay command is issued via the serial command (VISCA) communication line.

• When multiple motions are detected or motion is detected in another frame within the set interval following the original time the alarm was issued, another alarm command is not issued.

• When motion is detected after the interval time elapsed, the alarm is issued again.

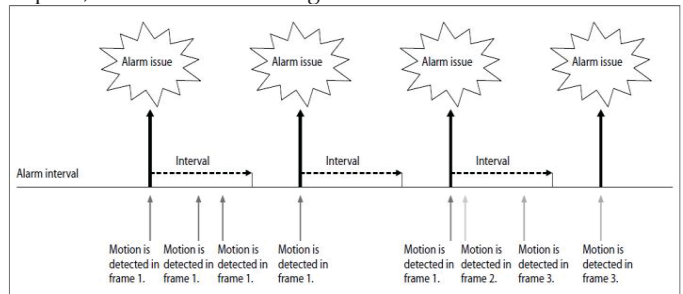

On	8x 01 04 1B 02 FF	Motion Detection On/Off
Off	8x 01 04 1B 03 FF	
Function Set	8x 01 04 1C 0m 0n 0p 0q 0r 0s FF	m: Display mode n: Detection Frame Set (0 to F) pq: Threshold Level (00 to FF) rs: Interval Time set (00 to FF)
Window Set	8x 01 04 1D 0m 0p 0q rr 0s FF	m: Select Detection Frame (0, 1, 2, 3) p: Start Horizontal Position (00 to 0F) q: Start Vertical Position (00 to 07) r: Stop Horizontal Position (01 to 10) s: Stop Vertical Position (01 to 08)
Alarm (Reply)	y0 07 04 1B 0p FF	p: Detection Frame Number

Privacy Zone Masking

Privacy Zone masking protects private objects and areas such as house windows, entrances, and exits which are within the camera's range of vision but not subject to surveillance. Privacy zone masking can be masked on the monitor to protect privacy.

- Mask can be set on up to 24 places according to Pan/Tilt positions.
- Interlocking control with zooming.
- Interlocking control with Pan/Tilt.
- Non-interlocking control with Pan/Tilt.

Command Set	Command	Command	Comments
CAM_PrivacyZone	SetMask	8x 01 04 76 mm nn 0r 0r 0s 0s FF	Setting Mask(Size) See "mm: Mask setting list", "nn: Setting", and "rr: w, ss: h" in "Parameters"
	Display	8x 01 04 77 pp pp pp pp FF	Setting Mask Display On/Off See "pp pp pp pp: Mask bit" in "Parameters" . pp pp pp pp: Mask setting (0: OFF, 1: ON)
	SetMaskColor	8x 01 04 78 pp pp pp pp qq rr FF	Setting Color of Mask See "pp pp pp pp: Mask bit" and "qq, rr: Color code" in "Parameters". qq: Color setting when setting the Mask bit to 0 rr: Color setting when setting the Mask
	SetPanTiltAngle	8x 01 04 79 0p 0p 0p 0q 0q 0q FF	Setting Pan/Tilt Angle See "Setting pan/tilt angle" in "Parameters". ppp: Pan angle, qqq: Tilt angle
	SetPTZMask	8x 01 04 7B mm 0p 0p 0p 0q 0q 0r 0r 0r 0r FF	Setting the direct position of PTZ See "mm: Mask setting list" and "Setting pan/tilt angle" in "Parameters". ppp: Pan , qqq: Tilt , rrrr: Zoom
	Non_InterlockMask	8x 01 04 6F mm 0p 0p 0q 0q 0r 0r 0s 0s FF	Setting non-interlocking the mask to pan/tilt See "mm: Mack setting list" and "pp:x,qq:y, rr:w, ss:

Inquiry Command	Command Packet	Inquiry Packet	Comments
CAM_PrivacyDisplayInq	8x 09 04 77 FF	y0 50 pp pp pp pp FF	Inquiry about the status of Setting Mask Display On/ Off See "pp pp pp pp: Mask bit" in "Parameters" . 1:On,0:Off
CAM_PrivacyPanTiltInq	8x 09 04 79 FF	y0 50 0p 0p 0p 0q 0q 0q FF	Inquiry about the pan/tilt position currently set See "Setting pan/tilt angle" in "Parameters". ppp: Pan, qqq: Tilt
CAM_PrivacyPTZInq	8x 09 04 7B mm FF	y0 50 0p 0p 0p 0q 0q 0q 0r 0r 0r 0r FF	Inquiry about pan/tilt/zoom position at the mm Mask setting See "mm: Mask setting list" and "Setting pan/tilt angle" in "Parameters". ppp: Pan osition, qqq: Tilt Position rrrr: Zoom
CAM_PrivacyMonitorInq	8x 09 04 6F FF	y0 50 pp pp pp pp FF	Inquiry about the mask currently displayed See "pp pp pp pp: Mask bit" in "Parameters".

- Mask Number : A=0x00, B=0x01,...W=0x16, X=0x17 (total 24 masks)
- Mask Bit

	pp								pp								pp															
bit	7	6	5	4	3	2	1	0	7	6	5	4	3	2	1	0	7	6	5	4	3	2	1	0	7	6	5	4	3	2	1	0
Mask	-	-	X	W	V	U	T	S	-	-	R	Q	P	O	N	M	-	-	L	K	J	I	H	G	-	-	F	E	D	C	B	A





- Mask List : mm

Mask Name	mm (Hex)	Mask	mm (Hex)
Mask_A	00h	Mask_I	08h
Mask_B	01h	Mask_J	09h
Mask_C	02h	Mask_K	0Ah
Mask_D	03h	Mask_L	0Bh
Mask_E	04h	Mask_M	0Ch
Mask_F	05h	Mask_N	0Dh
Mask_G	06h	Mask_O	0Eh
Mask_H	07h	Mask_P	0Fh


The priority order of the mask display is in the sequence from A (highest) to X (lowest).

- Pan/Tilt Angle

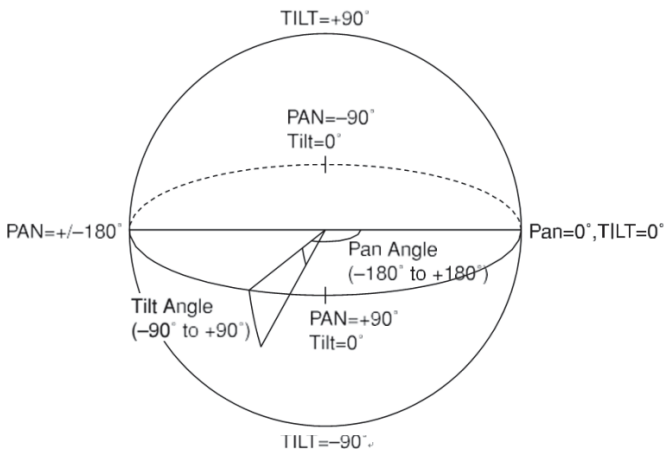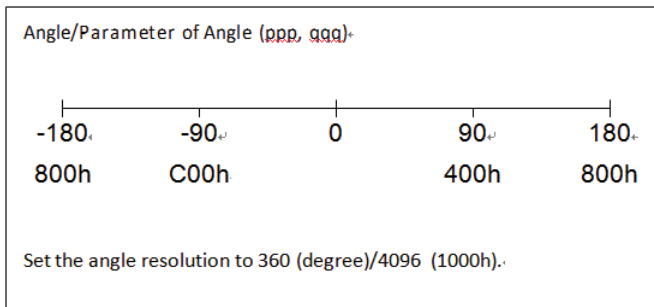

- ✓ You can use the tilt angle at which you can set the mask between -90 to +90 degrees. But the recommended tilt angle is between -70 to +70 degrees.
- ✓ It is recommended that you set the size to at least twice the size of the object (height and width).

- Mask Size : Width/Height

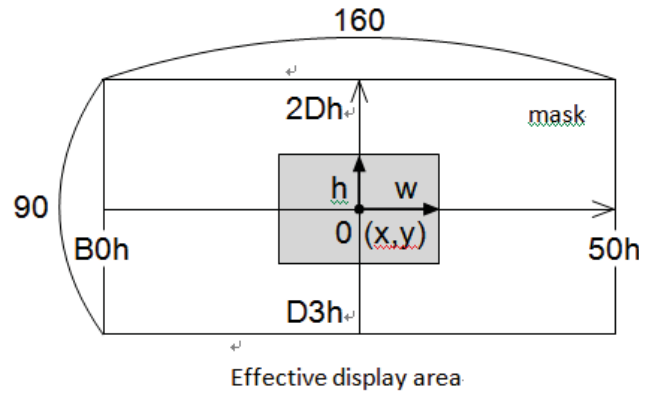

- Mask Color (qq, rr)

Mask (Color)	Normal	Translucence
Black	00h	10h
Gray1	01h	11h
Gray2	02h	12h
Gray3	03h	13h
Gray4	04h	14h
Gray5	05h	15h
Gray6	06h	16h
White	07h	17h
Red	08h	18h
Green	09h	19h
Blue	0Ah	1Ah
Cyan	0Bh	1Bh
Yellow	0Ch	1Ch
Magenta	0Dh	1Dh



Command List

Overview of RS232 Communication


- Communication speed :
2400/4800/9600/19200/38400/57600/115200bps
- Data bits : 8
- Start bit : 1
- Stop bit : 1
- Non parity
- Flow control using XON/XOFF and RTS/CTS, etc., is not supported

Command & Inquiry

- **Command**
Sends operational commands to the camera
- **Inquiry**
Used for inquiring about the current state of the camera

Command Packet	Note
Inquiry 8X QQ RR ... FF	QQ ₁ = Command/Inquiry, RR ₂ = category code

1) QQ = 01 (Command), 09 (Inquiry)
 2) RR = 00 (Interface), 04 (camera 1),
 06 (Pan/Tilter), 07 (camera 2)
 X = 1 to 7 : camera address

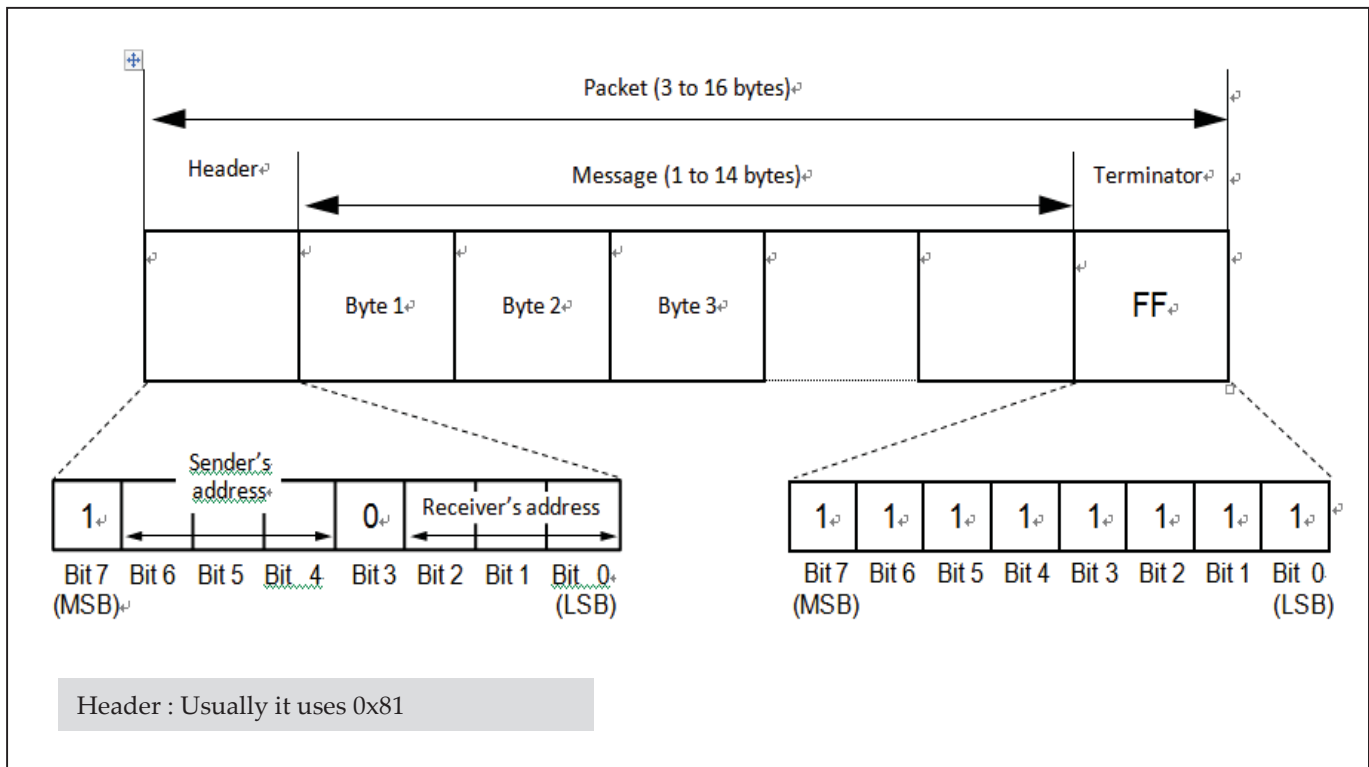

Inquiries

- **ACK message**

Returned by the camera when it receives a command.
No ACK message is returned for inquiries.

- **Completion message**

Returned by the camera when execution of commands or inquiries is completed. In the case of inquiry commands, it will contain reply data for the inquiry after the 3rd byte of the packet. If the ACK message is omitted, the socket number will contain 0.

	Reply Packet	Note
Ack	X0 4Y FF	Y = socket
Completion	X0 5Y FF	Y = socket
Completion (Inquiries)	X0 5Y ... FF	Y = socket

X = 9 to F: camera address + 8

- **Error message**

Error Packet	Description
X0 6Y 01 FF	Message length error (>14 bytes)
X0 6Y 02 FF	Syntax Error
X0 6Y 03 FF	Command Buffer Full
X0 6Y 04 FF	Command cancelled
X0 6Y 05 FF	No socket
X0 6Y 41 FF	Command not executable

X = 9 to F: camera address + 8, Y = socket number

- **Cam_VersionInq**

Returns information on the VISCA interface.

Inquiry	Packet	Reply	Description
Cam_VersionInq	8X 09 00 02 FF	Y0 50 GG GG HH HH JJ JJ KK FF	GGGG=Vender ID HHHH=Model ID JJJJ = ROM version KK=Maximum socket # (=02)

X = 1 to 7 : camera address (For inquiry packet)

X = 9 to F : camera address +8 (For reply packet)

GGGG = **0x0078** (vendor=KTNC) ⁽²⁾

HHHH :

HZ7810LC : 0468

HZ7810CC : 042E (NTSC)

042F(PAL)

JJJJ : ex) 0123 = Ver1.2.3

Command / ACK Example

Command	Command Message	Reply Message	Comments
General Command	81 01 04 38 02 FF (Example)	90 41 FF (ACK)+90 51 FF (Completion) 90 42 FF 90 52 FF	Returns ACK when a command has been accepted, and Completion when a command has been executed.
	81 01 04 38 FF (Example)	90 60 02 FF (Syntax Error)	Accepted a command which is not supported or a command lacking parameters.
	81 01 04 08 02 FF (Example)	90 61 41 FF (Command Not Executable) 90 62 41 FF	Could not execute the command in the current mode.
Inquiry Command	81 09 04 38 FF (Example)	90 50 02 FF (Completion)	ACK is not returned for the inquiry command.
	81 09 05 38 FF (Example)	90 60 02 FF (Syntax Error)	Accepted an incompatible command.
AddressSet	88 30 01 FF	88 30 02 FF	Returned the device address to +1.
IF_Clear(Broadcast)	88 01 00 01 FF	88 01 00 01 FF	Returned the same command.
IF_Clear (For x)	8x 01 00 01 FF	z0 50 FF (Completion)	ACK is not returned for this command.

Functions

Command Set	Command	Command Packet	Comments	
AddressSet	Broadcast	88 30 01 FF	Address setting	
IF_Clear	Broadcast	88 01 00 01 FF	I/F Clesr	
CommandCancel	-	8x 2p FF	p: Socket No. (=1 or 2)	
CAM_Power	On	8x 01 04 00 02 FF	Power ON/OFF	
	Off (Standby)	8x 01 04 00 03 FF		
CAM_Zoom	Stop	8x 01 04 07 00 FF	p=0 (Low) to 7 (High)	
	Tele (Standard)	8x 01 04 07 02 FF		
	Wide (Standard)	8x 01 04 07 03 FF		
	Tele (Variable)	8x 01 04 07 2p FF		
	Wide (Variable)	8x 01 04 07 3p FF		
	Direct	8x 01 04 47 0p 0q 0r 0s FF		pqrs: Zoom Position
CAM_DZoom	On	8x 01 04 06 02 FF	Digital zoom ON/OFF	
	Off	8x 01 04 06 03 FF		
	Combine Mode	8x 01 04 36 00 FF	Optical/Digital Zoom Combined	
	Separate Mode	8x 01 04 36 01 FF	Optical/Digital Zoom Separate	
	Stop	8x 01 04 06 00 FF		
	Tele (Variable)	8x 01 04 06 2p FF	p=0 (Low) to 7 (High)	
	Wide (Variable)	8x 01 04 06 3p FF	* Enabled during Separate Mode	
	x1/Max	8x 01 04 06 10 FF	x1/MAX Magnification Switchover * Enabled during Separate Mode	
	Direct	8x 01 04 46 00 0p 0q FF	pq: D-Zoom Position * Enabled during Separate Mode	
CAM_Focus	Stop	8x 01 04 08 00 FF	p=0 (Low) to 7 (High)	
	Far (Standard)	8x 01 04 08 02 FF		
	Near (Standard)	8x 01 04 08 03 FF		
	Far (Variable)	8x 01 04 08 2p FF		
	Near (Variable)	8x 01 04 08 3p FF		
	Direct	8x 01 04 48 0p 0q 0r 0s FF		pqrs: Focus Position
	Auto Focus	8x 01 04 38 02 FF		AF ON/OFF
	Manual Focus	8x 01 04 38 03 FF		
	Auto/Manual	8x 01 04 38 10 FF		
	One Push Trigger	8x 01 04 18 01 FF		One Push AF Trigger
	Infinity	8x 01 04 18 02 FF		Forced infinity
Near Limit	8x 01 04 28 0p 0q 0r 0s FF	pqrs: Focus Near Limit Position		
AF Sensitivity	Normal	8x 01 04 58 02 FF	AF Sensitivity High/Low	
	Low	8x 01 04 58 03 FF		
CAM_AFMode	Normal AF	8x 01 04 57 00 FF	AF Movement Mode	
	Interval AF	8x 01 04 57 01 FF		
	Zoom Trigger AF	8x 01 04 57 02 FF		
	PRESET (*3)	8x 01 04 57 03 FF		
	Active/Interval Time	8x 01 04 27 0p 0q 0r 0s FF		pq: Movement Time, rs: Interval
CAM_IRCorrection	Standard	8x 01 04 11 00 FF	FOCUS IR compensation data switching	
	IR Light	8x 01 04 11 01 FF		
CAM_ZoomFocus	Direct	8x 01 04 47 0p 0q 0r 0s 0t 0u 0v 0w FF	pqrs: Zoom Position tuvw: Focus Position	
CAM_Initialize	Lens	8x 01 04 19 01 FF	Lens Initialization Start	
	Camera	8x 01 04 19 03 FF	Camera reset	
CAM_WB	Auto	8x 01 04 35 00 FF	Normal Auto	
	Indoor	8x 01 04 35 01 FF	Indoor mode	
	Outdoor	8x 01 04 35 02 FF	Outdoor mode	
	One Push WB	8x 01 04 35 03 FF	One Push WB mode	
	ATW	8x 01 04 35 04 FF	Auto Tracing White Balance	
	Manual	8x 01 04 35 05 FF	Manual Control mode	
	One Push Trigger	8x 01 04 10 05 FF	One Push WB Trigger	
CAM_RGain	Reset	8x 01 04 03 00 FF	Manual Control of R Gain	
	Up	8x 01 04 03 02 FF		
	Down	8x 01 04 03 03 FF		
	Direct	8x 01 04 43 00 0p 0q FF		pq: R Gain, 0x00~0xff



CAM_BGain	Reset	8x 01 04 04 00 FF	Manual Control of B Gain	
	Up	8x 01 04 04 02 FF		
	Down	8x 01 04 04 03 FF		
	Direct	8x 01 04 44 00 00 0p 0q FF		pq: B Gain, 0x00~0xff
CAM_AE	Full Auto	8x 01 04 39 00 FF	Automatic Exposure mode	
	Manual	8x 01 04 39 03 FF	Manual Control mode	
	Shutter Priority	8x 01 04 39 0A FF	Shutter Priority Automatic Exposure mode	
	Iris Priority	8x 01 04 39 0B FF	Iris Priority Automatic Exposure mode	
	Bright	8x 01 04 39 0D FF	Bright Mode (Manual control)	
CAM_SlowShutter	Auto	8x 01 04 5A 02 FF	Auto Slow Shutter ON/OFF	
	Manual	8x 01 04 5A 03 FF		
CAM_Shutter	Reset	8x 01 04 0A 00 FF	Shutter Setting	
	Up	8x 01 04 0A 02 FF		
	Down	8x 01 04 0A 03 FF		
	Direct	8x 01 04 4A 00 00 0p 0q FF		pq: Shutter Position
CAM_Iris	Reset	8x 01 04 0B 00 FF	Iris Setting	
	Up	8x 01 04 0B 02 FF		
	Down	8x 01 04 0B 03 FF		
	Direct	8x 01 04 4B 00 00 0p 0q FF		pq: Iris Position
CAM_Gain	Reset	8x 01 04 0C 00 FF	Gain Setting	
	Up	8x 01 04 0C 02 FF		
	Down	8x 01 04 0C 03 FF		
	Direct	8x 01 04 4C 00 00 0p 0q FF		pq: Gain Position,0x00~0x1E, See GAIN POS.
	Gain Limit	8x 01 04 2C pp FF		pp: Gain Position, 0x00~0x1E, See GAIN LIMIT
CAM_Bright	Reset	8x 01 04 0D 00 FF	Bright Setting	
	Up	8x 01 04 0D 02 FF		
	Down	8x 01 04 0D 03 FF		
	Direct	8x 01 04 4D 00 00 0p 0q FF		pq: Bright Position
CAM_ExpComp	On	8x 01 04 3E 02 FF	Exposure Compensation ON/OFF	
	Off	8x 01 04 3E 03 FF		
	Reset	8x 01 04 0E 00 FF	Exposure Compensation Amount Setting	
	Up	8x 01 04 0E 02 FF		
	Down	8x 01 04 0E 03 FF		
	Direct	8x 01 04 4E 00 00 0p 0q FF		pq: ExpComp Position, 0x00~0x0E
CAM_BackLight	On	8x 01 04 33 02 FF	Back Light Compensation ON/OFF	
	Off	8x 01 04 33 03 FF		
CAM_AE_Response ⁽²⁾	Direct	8x 01 04 5D pp FF	pp: Automatic Exposure Response Setting (01 to 30), default value: 01	
CAM_WD	On	8x 01 04 3D 02 FF	Wide-D ON/OFF	
	Off	8x 01 04 3D 03 FF		
	Set Parameter	8x 01 04 2D 00 00 00 0s 00 00 00 00 FF		s: Blown-out highlight correction level (0:low, 1:middle, 2:high)
CAM_Aperture (sharpness level)	Reset	8x 01 04 02 00 FF	Aperture Control (sharpness)	
	Up	8x 01 04 02 02 FF		
	Down	8x 01 04 02 03 FF		
	Direct	8x 01 04 42 00 00 0p 0q FF		pq: Aperture Gain (0x00~0x0F)
CAM_HR	On	8x 01 04 52 02 FF	High-Resolution Mode ON/OFF	
	Off	8x 01 04 52 03 FF		
CAM_NR	—	8x 01 04 53 0p FF	p: NR Setting (0: OFF, level 1 to 5)	
CAM_Gamma	—	8x 01 04 5B 0p FF	p: Gamma setting (0: Standard, 1 to 6) See. GAMMA POSITION	
CAM_HighSensitivity	On	8x 01 04 5E 02 FF	High Sensitivity mode ON/OFF	
	Off	8x 01 04 5E 03 FF		
CAM_LR_Reverse	On	8x 01 04 61 02 FF	Mirror Image ON/OFF	
	Off	8x 01 04 61 03 FF		
CAM_Freeze	On	8x 01 04 62 02 FF	Still Image ON/OFF	
	Off	8x 01 04 62 03 FF		
CAM_PictureEffect	Off	8x 01 04 63 00 FF	Picture Effect Setting (* do not support neg.art)	
	Neg.Art	8x 01 04 63 02 FF		
	B&W	8x 01 04 63 04 FF		
CAM_PictureFlip	On	8x 01 04 66 02 FF	Picture flip ON/OFF	
	Off	8x 01 04 66 03 FF		
CAM_ICR	On	8x 01 04 01 02 FF	Infrared Mode ON(night)/OFF(day)	
	Off	8x 01 04 01 03 FF		
CAM_AutoICR	On	8x 01 04 51 02 FF	Auto dark-field mode On/Off	
	Off	8x 01 04 51 03 FF		



	Threshold	8x 01 04 21 00 00 0p 0q FF	pp: ICR ON → OFF Threshold Level (Night->Day)
	Threshold ^(*1)	8x 01 04 41 00 00 0p 0q FF	pp: ICR OFF → ON Threshold Level (Day->Night)
CAM _AutoICRAAlarmReply ^(*2)	On	8x 01 04 31 02 FF	Auto ICR switching Alarm ON/OFF
	Off	8x 01 04 31 03 FF	
	(Reply)	y0 07 04 31 02 FF	ICR OFF → ON (Night->Day)
		y0 07 04 31 03 FF	ICR ON → OFF (Day->Night)
CAM_MemSave	Write	8x 01 04 23 0X 0p 0p 0q 0q FF	X: 00 to 07 (Address), total 16 byte ppqq: 0x0000 to 0xFFFF (Data)
CAM_Display ^(*2)	On	8x 01 04 15 02 FF (8x 01 06 06 02 FF)	Display ON/OFF (function OSD display)
	Off	8x 01 04 15 03 FF (8x 01 06 06 03 FF)	Function OSD :
	On/Off ^(*2)	8x 01 04 15 10 FF (8x 01 06 06 10 FF)	- Display item : Zoom Ratio, Camera ID (*2) Framerate, AE mode, WB mode, Exposure Data
CAM_Title ^(*2) Total 15 lines L : 0 x0 ~ 0xE H-position nn : 0x00~0x28	Title Set1	8x 01 04 73 00 mm nn pp qq 00 00 00 00 00 00 FF	mm : V-position, nn:H-position pp:color, qq:blink
	Title Set2	8x 01 04 73 01 mm nn pp qq rr ss tt uu vv ww FF	mm~ww : setting of display characters (1st to 10st)
	Title Set3	8x 01 04 73 02 mm nn pp qq rr ss tt uu vv ww FF	mm~ww : setting of display characters (11st to 20st)
	Title Set4 (inserted)	8x 01 04 73 07 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 FF	mm~ww : setting of display characters (1st to 30st)
	Title Clear	8x 01 04 74 00 FF	Title Setting Clea
	On	8x 01 04 74 02 FF	Title Display On
	Off	8x 01 04 74 03 FF	Title Display Off
CAM_MultiLineTitle ^(*2) Total 15 lines L : 0 x0 ~ 0xE H-position nn : 0x00~0x28	Title Set1	8x 01 04 73 1L 00 nn pp qq 00 00 00 00 00 00 FF	L: Line Number (0x0~0xE) nn: H-position → nn : 00~0x28 pp: Color, qq: Blink
	Title Set2	8x 01 04 73 2L mm nn pp qq rr ss tt uu vv ww FF	L: Line Number (0x0~0xE) mnpqrstuvw: Setting of characters (1 to 10)
	Title Set3	8x 01 04 73 3L mm nn pp qq rr ss tt uu vv ww FF	L: Line Number (0x0~0xE) mnpqrstuvw: Setting of characters (11 to 20)
	Title Set4 (inserted)	8x 01 04 73 7L 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 FF	L: Line Number (0x0~0xE) 01~30 : Setting of characters (1 to 30)
	Title Clear	8x 01 04 74 1p FF	Title setting clea (0x0~0xE, F=all lines)
	On	8x 01 04 74 2p FF	Title display On/Off (0x0 to 0xE, F= all lines)
	Off	8x 01 04 74 3p FF	
CAM_Mute	On	8x 01 04 75 02 FF	Muting ON/OFF
	Off	8x 01 04 75 03 FF	
	On/Off	8x 01 04 75 10 FF	
CAM_PrivacyZone	SetMask	8x 01 04 76 mm nn 0r 0r 0s 0s FF	mm: Mask Settings nn 00: Modify, 01: New rr: W, ss: H
	Display(*2)	8x 01 04 77 pp pp pp pp FF	Mask Display ON/OFF pp pp pp pp: Mask Settings (0: OFF, 1: ON)
	SetMaskColor	8x 01 04 78 pp pp pp pp qq rr FF	pp pp pp pp: Mask Color Settings qq: Color Setting when 0 is selected rr: Color Setting when 1 is selected
	SetPanTiltAngle	8x 01 04 79 0p 0p 0p 0q 0q 0q FF	Pan/Tilt Angle Settings ppp: Pan qqq: Tilt
	SetPTZMask	8x 01 04 7B mm 0p 0p 0p 0q 0q 0r	Pan/Tilt/Zoom Settings for Mask ppp: Pan, qq: Tilt, rrrr: Zoom



		0r 0r 0r FF	
	Non_InterlockMask	8x 01 04 6F mm 0p 0p 0q 0q 0r 0r 0s 0s FF	mm: Non_Interlock Mask Settings pp: X, q: Y, rr: W, ss: H
CAM_IDWrite	–	8x 01 04 22 0p 0q 0r 0s FF	pqrs: Camera ID (=0000 to FFFF)
CAM_MD	On	8x 01 04 1B 02 FF	Motion Detection On/Off
	Off	8x 01 04 1B 03 FF	
	Function Set	8x 01 04 1C 0m 0n 0p 0q 0r 0s FF	m: Display mode n: Detection Frame Set (0 to F) pq: Threshold Level (00 to FF) rs: Interval Time set (00 to FF)
	Window Set	8x 01 04 1D 0m 0p 0q rr 0s FF	m: Select Detection Frame (0, 1, 2, 3) p: Start Horizontal Position (00 to 0F) q: Start Vertical Position (00 to 07) r: Stop Horizontal Position (01 to 10) s: Stop Vertical Position (01 to 08)
	Alarm (Reply)	y0 07 04 1B 0p FF	p: Detection Frame Number
CAM_Continuous ZoomPosReply ^(*)2)	On	8x 01 04 69 02 FF	ZoomPosition data Continuous Output On/Off
	Off	8x 01 04 69 03 FF	
	(Reply)	y0 07 04 69 0p 0p 0q 0q 0q 0q FF	pp: D-Zoom Position * 00: When Zoom Mode is Combine qqqq: Zoom Position
CAM_ZoomPos ReplyIntervalTimeSet ^(*)2)	–	8x 01 04 6A 00 00 0p 0p FF	pp: Zoom Position continuous output Interval Time [Vertical timing]
CAM_Continuous FocusPosReply ^(*)2)	On	8x 01 04 16 02 FF	Focus Position data Continuous Output On/Off
	Off	8x 01 04 16 03 FF	
	(Reply)	y0 07 04 16 00 00 0p 0p 0p 0p FF	pppp:Focus Position
CAM_FocusPos ReplyIntervalTimeSet ^(*)2)	–	8x 01 04 1A 00 00 0p 0p FF	pp: Focus Position continuous output Interval Time [Vertical timing]
CAM_ExtAutoICR_thresh old ^(*)2)	ICR ON -> OFF	8x 01 04 1F 21 00 00 0p 0q FF	pq : ICR ON -> OFF threshold when Auto ICR is on pq = 00h ~ 1Bh (Night → Day threshold)
	ICR OFF -> ON	8x 01 04 1F 21 01 00 0p 0q FF	pq : ICR OFF -> ON threshold when Auto ICR is on pq = 01h ~ 1Ch (Day → Night threshold)
CAM_RegisterValue	–	8x 01 04 24 mm 0p 0p FF	mm: Register No. (=00-7F) pp: Register Value (=00-7F) See the “Register setting”
CAM_ColorGain	Direct	8x 01 04 49 00 00 00 0p FF	p: Color Gain setting 0h (60%) to Eh (200%)
CAM_ColorHue	Direct	8x 01 04 4F 00 00 00 0p FF	p: Color Hue setting 0h (- 14 dgees) to Eh (+14 degrees)
CAM_Stablizer	On	8x 01 04 34 02 FF	Digital Image Stabilizer
	Off	8x 01 04 34 03 FF	
CAM_Defog	On	8x 01 04 37 02 0p FF	Defog On/Off
	Off	8x 01 04 37 03 00 FF	p:defog level(1:low,2:middle,3:high)
CAM_HLC ^(*)4)	Parameter Set	8x 01 04 14 0p 0q FF	p:HLC Level (0:Off, 1:On) q:HLC mask level(0:Off, 1(low)-F(high)
CAM_SpotAE	On	8x 01 04 59 02 FF	Spot AE mode
	Off	8x 01 04 59 03 FF	
	Position	8x 01 04 29 0p 0q 0r 0s FF	pq:X(0~F), rs:Y(0~F)

< Additional Command >

Command Set	Command	Command Packet	Comments
KT_KeyAct	Stop	8x 01 70 01 00 FF	
	Up	8x 01 70 01 21 FF	
	Down	8x 01 70 01 22 FF	
	Left	8x 01 70 01 23 FF	
	Right	8x 01 70 01 24 FF	
	Set	8x 01 70 01 26 FF	Set / Menu button
KT_DayNightMode ^(*)3)	Auto	8x 01 70 04 00 FF	Auto
	Day	8x 01 70 04 01 FF	Day
	Night	8x 01 70 04 02 FF	Night
	Ext-H	8x 01 70 04 03 FF	External input High
	Ext-L	8x 01 70 04 04 FF	External input Low



KT_AutoICRdelay	Delay time	8x 01 04 41 01 00 0p 0q FF	pq: sec (0-60sec)
KT_ExtICRthreshold ^(*)	Day->Night(EXT-H)	8x 01 70 05 10 0p 0q FF	pq: ICR OFF→ON Threshold Level (Day->Night)
	Night->Day(EXT-H)	8x 01 70 05 11 0p 0q FF	pq: ICR ON→OFF Threshold Level (Night->Day)
	Day->Night(EXT-L)	8x 01 70 05 20 0p 0q FF	pq: ICR OFF→ON Threshold Level (Day->Night)
	Night->Day(EXT-L)	8x 01 70 05 21 0p 0q FF	pq: ICR ON→OFF Threshold Level (Night->Day)
KT_PresetAF ^(*)	Setting OSD	8x 01 70 02 00 FF	Display PRESET POSITIONsetting screen
	Cancel & Exit	8x 01 70 02 01 FF	Cancel &Turn off the PRESET POSITIONsetting screen
	Save & Exit	8x 01 70 02 02 FF	Save &Turn off the PRESET POSITIONsetting screen
	Test PRESET	8x 01 70 02 10 FF	Start/Stop limit-target setting
	Set Preset AF Range	8x 01 70 03 0p 0q FF	pq : 0x00~0xFF, target auto focus range
KT_AgcAutoLimit ^(*)	-	8x 01 70 34 pp FF	pp:AGC Max Limit (0x00-0x0F) See. GAIN LIMIT table)
KT_Sharpness ^(*)	-	8x 01 70 53 0p FF	p:sharpness level (0x00-0x0E)
KT_AgcMode ^(*)	-	8x 01 70 5C 0p FF	p=1(AGC On), 0(AGC Off)
KT_IrisCloseLimit ^(*)	-	8x 01 70 2B pp FF	pp:Iris Close Limit, 0x00-0xA0 See. IRIS CLOSE LIMIT
KT_ZoomFocusPreset ^(*)	Set	8x 01 70 3F 01 0p 0q 0r FF	pqr : preset Number (0x000-0x0FF)
	Recall	8x 01 70 3F 02 0p 0q 0r FF	pqr : preset Number (0x000-0x0FF)
	Clear	8x 01 70 3F 03 0p 0q 0r FF	pqr : preset Number (0x000-0x0FF)
	Clear All Preset	8x 01 70 3F 0F 00 00 00 FF	Clear all preset data
KT_HomePowerOn	On	8x 01 70 24 02 FF	Moving to x1 position after power on
	Off	8x 01 70 24 03 FF	After power on, move to final position before power off

Inquiry Command List

Inquiry Command	Command Packet	Inquiry Packet	Comments
CAM_PowerInq	8x 09 04 00 FF	y0 50 02 FF	On
		y0 50 03 FF	Off (Standby)
CAM_ZoomPosInq	8x 09 04 47 FF	y0 50 0p 0q 0r 0s FF	pqrs: Zoom Position
CAM_DZoomModeInq	8x 09 04 06 FF	y0 50 02 FF	D-Zoom On
		y0 50 03 FF	D-Zoom Off
CAM_DZoomC/SMODEInq	8x 09 04 36 FF	y0 50 00 FF	Combine Mode
		y0 50 01 FF	Separate Mode
CAM_DZoomPosInq	8x 09 04 46 FF	y0 50 00 00 0p 0q FF	pq: D-Zoom Position
CAM_FocusModeInq	8x 09 04 38 FF	y0 50 02 FF	Auto Focus
		y0 50 03 FF	Manual Focus
CAM_FocusPosInq	8x 09 04 48 FF	y0 50 0p 0q 0r 0s FF	pqrs: Focus Position
CAM_FocusNearLimitInq	8x 09 04 28 FF	y0 50 0p 0q 0r 0s FF	pqrs: Focus Near Limit Position
CAM_AFSensitivityInq	8x 09 04 58 FF	y0 50 02 FF	AF Sensitivity Normal
		y0 50 03 FF	AF Sensitivity Low
CAM_AFModeInq	8x 09 04 57 FF	y0 50 00 FF	Normal AF
		y0 50 01 FF	Interval AF
		y0 50 02 FF	Zoom Trigger AF
CAM_AFTimeSettingInq	8x 09 04 27 FF	y0 50 0p 0q 0r 0s FF	pq: Movement Time, rs: Interval
CAM_IRCorrectionInq	8x 09 04 11 FF	y0 50 00 FF	Standard
		y0 50 01 FF	IR Light
CAM_WBModeInq	8x 09 04 35 FF	y0 50 00 FF	Auto
		y0 50 01 FF	In Door
		y0 50 02 FF	Out Door
		y0 50 03 FF	One Push WB
		y0 50 04 FF	ATW
		y0 50 05 FF	Manual
CAM_RGainInq	8x 09 04 43 FF	y0 50 00 00 0p 0q FF	pq: R Gain
CAM_BGainInq	8x 09 04 44 FF	y0 50 00 00 0p 0q FF	pq: B Gain
CAM_AEModeInq	8x 09 04 39 FF	y0 50 00 FF	Full Auto
		y0 50 03 FF	Manual
		y0 50 0A FF	Shutter Priority
		y0 50 0B FF	Iris Priority
		y0 50 0D FF	Bright
CAM_SlowShutterModeInq	8x 09 04 5A FF	y0 50 02 FF	Auto
		y0 50 03 FF	Manual
CAM_ShutterPosInq	8x 09 04 4A FF	y0 50 00 00 0p 0q FF	pq: Shutter Position



CAM_IrisPosInq	8x 09 04 4B FF	y0 50 00 00 0p 0q FF	pp: Iris Position
CAM_GainPosInq	8x 09 04 4C FF	y0 50 00 00 0p 0q FF	pp: Gain Position
CAM_GainLimitInq	8x 09 04 2C FF	y0 50 0q FF	p: Gain Limit
CAM_BrightPosInq	8x 09 04 4D FF	y0 50 00 00 0p 0q FF	pp: Bright Position
CAM_ExpCompModeInq	8x 09 04 3E FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_ExpCompPosInq	8x 09 04 4E FF	y0 50 00 00 0p 0q FF	pp: ExpComp Position
CAM_BackLightModeInq	8x 09 04 33 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_AE_ResponseInq	8x 09 04 5D FF	y0 50 pp FF	pp: 01 to 20 (hex)
CAM_WDModeInq	8x 09 04 3D FF	y0 50 02 FF	On Wide-D
		y0 50 03 FF	Off
CAM_WDParameterInq	8x 09 04 2D FF	y0 50 00 00 00 0s 00 00 00 00 FF	s: Blown-out highlight correction level
CAM_ApertureInq	8x 09 04 42 FF	y0 50 00 00 0p 0q FF	pp: Aperture Gain
CAM_HRModeInq	8x 09 04 52 FF	y0 50 02 FF	On (Hi-Resolution)
		y0 50 03 FF	Off
CAM_NRModeInq	8x 09 04 53 FF	y0 50 0p FF	Noise Reduction p: 0 to 5
CAM_GammaInq	8x 09 04 5B FF	y0 50 0p FF	Gamma p: 0 to 4
CAM_HighSensitivityInq	8x 09 04 5E FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_LR_ReverseModeInq	8x 09 04 61 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_FreezeModeInq	8x 09 04 62 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_PictureEffectModeInq	8x 09 04 63 FF	y0 50 00 FF	Off
		y0 50 02 FF	Neg.Art
		y0 50 04 FF	B&W
CAM_PictureFlipModeInq	8x 09 04 66 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_ICRModeInq	8x 09 04 01 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_AutoICRModeInq	8x 09 04 51 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_AutoICRThresholdInq	8x 09 04 21 FF	y0 50 00 00 0p 0q FF	pp: ICR ON → OFF Threshold Level
CAM_AutoICRAAlarmReplyInq	8x 09 04 31 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_MemSaveInq	8x 09 04 23 0X FF	y0 50 0p 0p 0q 0q FF	X: 00 to 07 (Address) ppqq: 0x0000 to 0xFFFF (Data)
CAM_DisplayModeInq	8x 09 04 15 FF (8x 09 06 06 FF)	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_MuteModeInq	8x 09 04 75 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_PrivacyDisplayInq	8x 09 04 77 FF	y0 50 pp pp pp pp FF	pp pp pp pp: Mask Display (0: OFF, 1: ON)
CAM_PrivacyPanTiltInq	8x 09 04 79 FF	y0 50 0p 0p 0p 0q 0q 0q FF	ppp: Pan qq: Tilt
CAM_PrivacyPTZInq	8x 09 04 7B mm FF	y0 50 0p 0p 0p 0q 0q 0r 0r 0r FF	mm: Mask Settings ppp: Pan qqq: Tilt rrr: Zoom
CAM_PrivacyMonitorInq	8x 09 04 6F FF	y0 50 pp pp pp pp FF	pp pp pp pp: Mask is displayed now.
CAM_IDInq	8x 09 04 22 FF	y0 50 0p 0q 0r 0s FF	pqrs: Camera ID
CAM_VersionInq	8x 09 00 02 FF	y0 50 00 78 mn pq rs tu vw FF	mnpq: Model Code (04xx) rstu: ROM version vw: Socket Number (=02) <mnpq:Model Code> HZ7810LC : 0468 HZ7810CC : 042E (NTSC) 042F(PAL)
CAM_MDModeInq	8x 09 04 1B FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_MDFunctionInq	8x 09 04 1C FF	y0 50 0m 0n 0p 0q 0r 0s FF	m: Display mode n: Detection Frame Set (0 to F) pp: Threshold Level (0 to FF) rs: Interval Time set (0 to FF)
CAM_MDWindowInq	8x 09 04 1D 0m FF	y0 50 0p 0q 0r 0s FF	m: Select Detection Frame (0, 1, 2, 3) p: Start Horizontal Position (00 to 0B) q: Start Vertical Position (00 to 07) r: Stop Horizontal Position (01 to 0C) s: Stop

			Vertical Position (01 to 08)
CAM_ContinuousZoomPos ReplyModeInq ⁽²⁾	8x 09 04 69 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_ZoomPosReplyIntervalT imeInq ⁽²⁾	8x 09 04 6A FF	y0 50 00 00 0p 0p FF	pp: Interval Time
CAM_ContinuousFocusPos ReplyModeInq ⁽²⁾	8x 09 04 16 FF	y0 50 02 FF	On
		y0 50 03 FF	Off
CAM_FocusPosReplyIntervalT imeInq	8x 09 04 1A FF	y0 50 00 00 0p 0p FF	pp: Interval Time
CAM_ExAutoICRThresholdIn q ⁽²⁾	8x 09 04 1F 21 00 FF	y0 50 00 00 0p 0q FF	pq: ICR ON→OFF threshold when Auto ICR is on (Night → Day)
CAM_ExAutoICROnLevelInq ⁽²⁾	8x 09 04 1F 21 01 FF	y0 50 00 00 0p 0q FF	pq: ICR OFF→ON threshold when Auto ICR is on (Day → Night)
CAM_RegisterValueInq	8x 09 04 24 mm FF	y0 50 0p 0p FF	mm: Register No. (00 to 7F) pp: Register Value (00 to FF)
CAM_ColorGainInq	8x 09 04 49 FF	y0 50 00 00 00 0p FF	p: Color Gain setting 0h (60%) to Eh (200%)
CAM_ColorHueInq	8x 09 04 4F FF	y0 50 00 00 00 0p FF	p: Color Hue setting 0h (- 14 degrees) to Eh (+ 14 degrees)
CAM_StabilizerInq	8x 09 04 34 FF	y0 50 02 FF	Stabilizer(DIS) on
		y0 50 03 FF	Stabilizer(DIS) off
CAM_DefogInq	8x 09 04 37 FF	y0 50 02 0p FF	Defog On, p:defog level(1:low,2:middle,3:high)
		y0 50 03 00 FF	Defog Off
CAM_HLCInq	8x 09 04 14 FF	y0 50 0p 0q FF	p:HLC Level (0:Off, 1:On) q:HLC mask level(0:Off, 1(low)~F(high)
CAM_SpotAEModeInq	8x 09 04 59 FF	y0 50 02 FF	Spot AE on
		y0 50 03 FF	Spot AE Off
CAM_SpotAEPosInq	8x 09 04 29 FF	y0 50 0p 0q 0r 0s FF	pq:X(0~F), rs:Y(0~F)

< Additional Inquiry >

Inquiry Command	Command Packet	Inquiry Packet	Comments
KT_DayNightModeInq ⁽³⁾	8x 09 70 04 FF	y0 50 0p 0q FF	pq:day&night mode
KT_ExtICRthresholdInq ⁽³⁾	8x 09 70 05 10 FF	y0 50 0p 0q FF	pq:ext-H day->night threshold
	8x 09 70 05 11 FF	y0 50 0p 0q FF	pq:ext-H night->day threshold
	8x 09 70 05 20 FF	y0 50 0p 0q FF	pq:ext-L day->night threshold
	8x 09 70 05 21 FF	y0 50 0p 0q FF	pq:ext-L night->day threshold
KT_PresetAFRangeInq ⁽³⁾	8x 09 70 03 FF	y0 50 0p 0q FF	pq: preset AF range
KT_AgcAutoLimitInq ⁽⁴⁾	8x 09 70 34 FF	y0 50 pp FF	pp:AGC Max Limit (See. GAIN LIMIT table)
KT_SharpnessInq ⁽⁴⁾	8x 09 70 53 FF	y0 50 0p FF	p:sharpness level (0x00~0x0F)
KT_AgcModeInq ⁽⁴⁾	8x 09 70 5C FF	y0 50 0p FF	p:1(AGC On),0(AGC Off)
KT_IrisCloseLimitInq ⁽⁴⁾	8x 09 70 2B FF	y0 50 0p 0q FF	pq:Iris Close Limit, 0x00~0xA0
KT_ZoomFocusPresetInq ⁽⁴⁾	8x 09 703F 0n 0n 0n FF	y0 50 0v 0z 0z 0z 0f 0f 0f FF	nnn:preset number(0x000~0x0FF) v : 1(saved), 0(empty) zzzz : zoom position ffff : focus position
KT_HomePowerOnInq	8x 09 70 24 FF	y0 50 0p FF	p:Home Position Mode, 2(ON)/3(OFF)



Lens Control System Inquiry Commands Command Packet 8x097E7E00FF

Byte	Bit	Comments
0	7	Destination Address
	6	
	5	
	4	
	3	Source Address
	2	
	1	
0		
1	7	0 Completion Message
	6	1
	5	0
	4	1
	3	0
	2	0
	1	0
0	0	
2	7	0
	6	0
	5	0
	4	0
	3	Zoom Position (HH)
2		
1		
0	0	
3	7	0
	6	0
	5	0
	4	0
	3	Zoom Position (HL)
2		
1		
0	0	
4	7	0
	6	0
	5	0
	4	0
	3	Zoom Position (LH)
2		
1		
0	0	
5	7	0
	6	0
	5	0
	4	0
	3	Zoom Position (LL)
2		
1		
0	0	

Byte	Bit	Comments
6	7	0
	6	0
	5	0
	4	0
7	3	Focus Near Limit (H)
	2	
	1	
	0	
8	7	0
	6	0
	5	0
	4	0
9	3	Focus Near Limit (L)
	2	
	1	
	0	
10	7	0
	6	0
	5	0
	4	0
	3	Focus Position (HH)
2		
1		
0	0	
11	7	0
	6	0
	5	0
	4	0
	3	Focus Position (HL)
2		
1		
0	0	
12	7	0
	6	0
	5	0
	4	0
	3	Focus Position (LH)
2		
1		
0	0	
13	7	0
	6	0
	5	0
	4	0
	3	Focus Position (LL)
2		
1		
0	0	

Byte	Bit	Comment
12	7	0
	6	0
	5	0
	4	0
	3	0
	2	0
	1	0
0	0	
13	7	0
	6	0
	5	DZoomMode 0: Combine 1: Separate
	4	0: Normal 1: Interval
	3	2: Zoom Trigger
	2	AF Sensitivity 0: Slow 1: Normal
	1	Digital Zoom 1: On 0: Off
0	Focus Mode 0: Manual 1: Auto	
14	7	0
	6	0
	5	0
	4	0
	3	Low Contrast Detection 1: Yes 0: No
	2	Camera Memory Recall 1: Executing 0:
	1	Focus Command 1: Executing 0: Stopped
0	Zoom Command 1: Executing 0: Stopped	
15	7	1 Terminator (FFh)
	6	1
	5	1
	4	1
	3	1
	2	1
	1	1
0	1	



Camera Control System Inquiry Commands Command Packet 8x097E7E01FF

Byte	Bit	Comments
0	7	Destination Address
	6	
	5	
	4	
	3	Source Address
	2	
	1	
	0	
1	7	
	6	1
	5	0
	4	1
	3	0
	2	0
	1	0
	0	0
2	7	0
	6	0
	5	0
	4	0
	3	R Gain (H)
2		
1		
3	7	0
	6	0
	5	0
	4	0
	3	R Gain (L)
	2	
	1	
	0	
4	7	
	6	0
	5	0
	4	0
	3	B Gain (H)
2		
1		
5	7	0
	6	0
	5	0
	4	0
	3	B Gain (L)
2		
1		

Byte	Bit	Comments
6	7	0
	6	0
	5	0
	4	0
	3	WB Mode
	2	
1		
0		
7	7	0
	6	0
	5	0
	4	0
	3	Aperture Gain
	2	
	1	
0		
8	7	
	6	0
	5	0
	4	Exposure Mode
	3	
	2	
	1	
	9	7
6		0
5		High-Resolution 1: On 0: Off
4		Wide-D (1: Other than Off, 0: Off)
3		0
2		Back Light 1: On 0: Off
1		Exposure Comp. 1: On 0: Off
0		Slow Shutter 1: Auto 0:
10	7	0
	6	0
	5	0
	4	Shutter Position
	3	
	2	
11	7	0
	6	0
	5	0
	4	Iris Position
	3	
	2	
	1	
	0	

Byte	Bit	Comments
12	7	0
	6	0
	5	0
	4	0
	3	Gain Position
2		
1		
0		
13	7	0
	6	0
	5	0
	4	Bright Position
	3	
	2	
	1	
14	7	0
	6	0
	5	0
	4	0
	3	Exposure Comp. Position
	2	
	1	
0		
15	7	1 Terminator (FFh)
	6	1
	5	1
	4	1
	3	1
	2	1
	1	1
	0	1



Other Inquiry Commands Command Packet 8x097E7E02FF

Byte	Bit	Comments	
0	7	Destination Address	
	6		
	5		
	4		
	3	3	Source Address
		2	
		1	
		0	
1	7	0 Completion Message	
	6	1	
	5	0	
	4	1	
	3	0	
	2	0	
	1	0	
	0	0	
2	7	0	
	6	0	
	5	0	
	4	0	
	3	Auto ICR Alarm (1: On, 0:	
	2	Auto ICR 1: On 0: Off	
1	0		
0	Power 1: On 0: Off		
3	7	0	
	6	0	
	5	0	
	4	ICR 1: On 0: Off	
	3	Freeze 1: On 0: Off	
	2	LR Reverse 1: On 0: Off	
	1	0	
0	0		
4	7	0	
	6	0	
	5	Privacy Zone 1: On 0: Off	
	4	Mute 1: On 0: Off	
	3	Title Display 1: On 0: Off	
	2	Display 1: On 0: Off	
	1	0	
	0	0	
5	7	0	
	6	0	
	5	0	
	4	0	
	3	Picture Effect Mode	
	2		
1			
0			

Byte	Bit	Comments
6	7	0
	6	0
	5	0
	4	0
	3	0
	2	0
	1	0
	0	0
7	7	0
	6	0
	5	0
	4	0
	3	0
	2	0
	1	0
	0	0
8	7	0
	6	0
	5	0
	4	0
	3	Camera ID (HH)
2		
1		
0		
9	7	0
	6	0
	5	0
	4	0
	3	Camera ID (HL)
	2	
	1	
0		
10	7	0
	6	0
	5	0
	4	0
	3	Camera ID (LH)
	2	
	1	
0		
11	7	0
	6	0
	5	0
	4	0
	3	Camera ID (LL)
	2	
	1	
0		

Byte	Bit	Comments
12	7	0
	6	0
	5	0
	4	Memory 1: Provided 0: Not provided
	3	0
	2	ICR 1: Provided 0: Not provided
	1	Stabilizer 1:provided, 0: not provided
0	1: 1/50, 1/25 0: 1/60, 1/30	
13	7	0
	6	0
	5	0
	4	0
	3	Day&Night Mode ^(*) 0:auto 1:day 2:night 3:Ext-H, 4:Ext-L
	2	
1		
0		
14	7	0
	6	0
	5	0
	4	0
	3	0
	2	0
	1	0
0	0	
15	7	1 Terminator (FFh)
	6	1
	5	1
	4	1
	3	1
	2	1
	1	1
0	1	



Enlargement Function1 Query Command..... Command Packet 8x 09 7E 7E 03 FF

Byte	Bit	Comments
0	7	Destination Address
	6	
	5	
	4	
	3	Source Address
	2	
	1	
	0	
1	7	0 Completion Message
	6	1
	5	0
	4	1
	3	0
	2	0
	1	0
	0	0
2	7	0
	6	0
	5	0
	4	0
	3	Digital Zoom Position (H)
	2	
	1	
	0	
3	7	0
	6	0
	5	0
	4	0
	3	Digital Zoom Position (L)
	2	
	1	
	0	
4	7	0
	6	0
	5	0
	4	0
	3	AF Activation Time (H)
	2	
	1	
	0	
5	7	0
	6	0
	5	0
	4	0
	3	AF Activation Time (L)
	2	
	1	
	0	

Byte	Bit	Comments
6	7	0
	6	0
	5	0
	4	0
	3	AF Interval Time (H)
	2	
	1	
	0	
7	7	0
	6	0
	5	0
	4	0
	3	AF Interval Time (L)
	2	
	1	
	0	
8	7	0
	6	0
	5	0
	4	0
	3	0
	2	
	1	
	0	
9	7	0
	6	0
	5	0
	4	0
	3	0
	2	
	1	
	0	
10	7	0
	6	0
	5	0
	4	0
	3	0
	2	MD (1: On, 0: Off)
	1	Reserved
	0	Picture flip (1: On, 0: Off)

Byte	Bit	Comments
11	7	0
	6	Color Gain (0h (60%) to Eh (200%))
	5	
	4	
	3	
	2	Advanced Privacy (1: Provided, 0: Not provided)
	1	Alarm (1: Provided, 0: Not provided)
	0	Picture flip (1: Provided, 0: Not provided)
12	7	0
	6	0
	5	0
	4	0
	3	
	2	
	1	
	0	0
7	0	
6	Gamma	
5		
4		
3		High Sensitivity mode (1: ON, 0: OFF)
13	2	NR Level
	1	
	0	
	7	
	6	0
	5	
	4	
	3	
2		
1		
0		
14	7	1 Terminator (FFh)
	6	1
	5	1
	4	1
	3	1
	2	1
	1	1
	0	1



Enlargement Function2 Query Command..... Command Packet 8x 09 7E 7E 04 FF

Byte	Bit	Comm
0	7	Destination Address
	6	
	5	
	4	
	3	Source Address
	2	
	1	
	0	
1	7	0 Completion Message
	6	1
	5	0
	4	1
	3	0
	2	0
	1	0
	0	0
2	7	0
	6	0
	5	0
	4	0
	3	0
	2	WideD mode (0: OFF, 1: ON)
1		
0		
3	7	0
	6	0
	5	0
	4	0
	3	0
	2	
	1	0
0		
4	7	0
	6	0
	5	0
	4	0
	3	0
	2	
	1	WideD blown-out highlight
	0	correction level 0: L 1: M 2: H
5	7	0
	6	0
	5	0
	4	0
	3	0
	2	
1		
0		

Byte	Bit	Comments
6	7	0
	6	0
	5	0
	4	0
	3	0
	2	
	1	
	0	
7	7	0
	6	0
	5	0
	4	0
	3	0
	2	0
	1	0
	0	Defog Mode(1:on,0:off)
8	7	0
	6	0
	5	0
	4	0
	3	0
	2	0
	1	0
	0	0
9	7	0
	6	0
	5	0
	4	0
	3	0
	2	0
	1	0
0	0	
10	7	0
	6	0
	5	0
	4	0
	3	0
	2	0
	1	0
	0	0

Byte	Bit	Comments
11	7	0
	6	0
	5	0
	4	0
	3	0
	2	0
	1	0
	0	0
12	7	0
	6	0
	5	0
	4	0
	3	0
	2	0
	1	0
	0	0
13	7	0
	6	0
	5	0
	4	0
	3	0
	2	0
	1	0
	0	0
14	7	0
	6	0
	5	0
	4	0
	3	0
	2	0
	1	0
0	0	
15	7	1 Terminator (FFh)
	6	1
	5	1
	4	1
	3	1
	2	1
	1	1
	0	1



Enlargement Function3 Query Command..... Command Packet 8x 09 7E 7E 05 FF

Byte	Bit	Comments
0	7	Destination Address
	6	
	5	
	4	
	3	Source Address
	2	
	1	
	0	
1	7	0 Completion Message
	6	1
	5	0
	4	1
	3	0
	2	0
	1	0
	0	0
2	7	0
	6	0
	5	0
	4	0
	3	0
2		
1	0	
0	0	
3	7	0
	6	Reserved
	5	
	4	
	3	
	2	
	1	
0		
4	7	0
	6	Reserved
	5	
	4	
	3	
	2	
	1	
0		
5	7	0
	6	Reserved
	5	
	4	
	3	
	2	
	1	
0		

Byte	Bit	Comment
6	7	0
	6	Reserved
	5	
	4	
	3	
	2	
	1	
0		
7	7	0
	6	Reserved
	5	
	4	
	3	
	2	
	1	
0		
8	7	0
	6	Reserved
	5	
	4	
	3	
	2	
1	0	
0	0	
9	7	0
	6	Reserved
	5	
	4	
	3	
	2	
1	0	
0	0	
10	7	0
	6	Reserved
	5	
	4	
	3	
	2	
	1	
0		

Byte	Bit	Comments
11	7	0
	6	Reserved
	5	
	4	
	3	
	2	
	1	
0		
12	7	0
	6	Reserved
	5	
	4	
	3	
	2	
	1	
0		
13	7	0
	6	Reserved
	5	
	4	
	3	
	2	
1	0	
0	0	
14	7	0
	6	Reserved
	5	
	4	
	3	
	2	
1	0	
0	0	
15	7	1 Terminator (FFh)
	6	1
	5	1
	4	1
	3	1
	2	1
	1	1
	0	1



Command Setting Values

SHUTTER SPEED

Index	60/30 mode	50/25 mode
15	1/10000	1/10000
14	1/6000	1/6000
13	1/4000	1/3500
12	1/3000	1/2500
11	1/2000	1/1750
10	1/1500	1/1250
0F	1/1000	1/1000
0E	1/725	1/600
0D	1/500	1/425
0C	1/350	1/300
0B	1/250	1/215
0A	1/180	1/150
09	1/125	1/120
08	1/100	1/100
07	1/90	1/75
06	1/60	1/50
05	1/30	1/25
04	1/15	1/12
03	1/8	1/6
02	1/4	1/3
01	1/2	1/2
00	1/1	1/1

IRIS

Index	Iris
11	F1.6
10	F2
0F	F2.4
0E	F2.8
0D	F3.4
0C	F4
0B	F4.8
0A	F5.6
09	F6.8
08	F8
07	F9.6
06	F11
05	F14
00	CLOSE

Aperture (=sharpness)

Index	Level
0F	Sharp
...	
00	Dull

Red/Blue Manual Gain

0x00 ~ 0xFF

GAIN LIMIT & GAIN POSITION

Index	Gain
0F	+58dB
0E	+52dB
0D	+48dB
0C	+44dB
0B	+40dB
0A	+36dB
09	+32dB
08	+28dB
07	+24dB
06	+20dB
05	+16dB
04	+12dB
03	+8dB
02	+4dB
01	+0dB (OFF)
00	-3dB

EXPOSURE COMPENSTAION(bright)


Index	Iris	Gain
0E	+7	+10.5 dB
0D	+6	+9 dB
0C	+5	+7.5 dB
0B	+4	+6 dB
0A	+3	+4.5 dB
09	+2	+3 dB
08	+1	+1.5 dB
07	0	0 dB
06	-1	-1.5 dB
05	-2	-3 dB
04	-3	-4.5 dB
03	-4	-6 dB
02	-5	-7.5 dB
01	-6	-9 dB
00	-7	-10.5 dB

AE BRIGHT MODE LEVEL

Index	Iris	Gain
1F	F1.6	+58dB
1E	F1.6	+52dB
1D	F1.6	+48dB
1C	F1.6	+44dB
1B	F1.6	+40dB
1A	F1.6	+36dB
19	F1.6	+32dB
18	F1.6	+28dB
17	F1.6	+24dB
16	F1.6	+20dB
15	F1.6	+16dB
14	F1.6	+12dB
13	F1.6	+8dB
12	F1.6	+4dB
11	F1.6	0 dB
10	F2	0 dB
0F	F2.4	0 dB
0E	F2.8	0 dB
0D	F3.4	0 dB
0C	F4	0 dB
0B	F4.8	0 dB
0A	F5.6	0 dB
09	F6.8	0 dB
08	F8	0 dB
07	F9.6	0 dB
06	F11	0 dB
05	F14	0 dB
00	CLOSE	0 dB

IRIS CLOSE LIMIT

Index	Open Level
A0	More Open
...	
60	default
...	
10	More Close

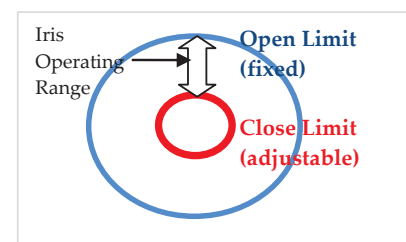

Register Setting

CAM_RegisterValue	8x 01 04 24 mm 0p 0p FF	mm: Register No. (=00-7F) pp: Register Value (=00-7F)
-------------------	----------------------------	--

command	Register (mm)	Value (pp)	contents
VISCA Baud Rate	00	00 (Default)	9600 bps
		01	19200 bps
		02	38400 bps
		03	115200bps
		04	57600 bps
		05	2400 bps
		06	4800 bps
Monitoring Mode	72	01	1080i/60 ^(*)
		02	1080i/60 ^(*)
		04	1080i/50 ^(*)
		06	1080p/30
		07	1080p/30 ^(*)
		08	1080p/25
		09	720p/60
		0A	720p/60 ^(*)
		0C	720p/50
		0E	720p/30
		0F	720p/30 ^(*)
		11	720p/25
		13	1080p/60
		14	1080p/50
		15	1080p/60 ^(*)
LVDS mode	74	00 (Default)	Single output
		01	Dual output
Zoom Limit	50	00-FF (default:00)	Wide Limit
	51	00-FF (default:00)	Tele Limit
E-Zoom Max	52	00-FF (Default:EB)	Max. digital zoom ratio = 256 ÷ (256-Value)
FocusOffset @DomeCover	55	00-FF (Default:00)	00: None FF: Max.
Auto Slow shutter limit ^(*)	56	01 (default)	1/30
		02	1/15
		03	1/8
		04	1/4
		05	1/2
		06	1/1
Enlargement Mode ^(*)	5F	00-FF (default:00)	Bit3:Auto ICR OFF→ON setting enable ON/OFF (1:ON, 0:OFF)

Language ^(*)	60	00-06	00:English 01:Russian 02:Spanish 03:Chinese 04:German 05:Franch 06:Portuguese 07:Japanes
CVBS scale ^(*)	7C	00 01	4:3 16:9
EX-SDI V1.0 ^(*)	7E	00 01	OFF ON

Title Setting


Line number	00 to 0Eh	
H-position	00 to 30h	
Blink	00: Dose not blink	
	01: Blinks	
Color	00	White
	01	Yellow
	02	Violet
	03	Red
	04-06	White
Blink	00	OFF
	01	ON

00	01	02	03	04	05	06	07
A	B	C	D	E	F	G	H
08	09	0a	0b	0c	0d	0e	0f
I	J	K	L	M	N	O	P
10	11	12	13	14	15	16	17
Q	R	S	T	U	V	W	X
18	19	1a	1b	1c	1d	1e	1f
Y	Z	&	?	!	1	2	
20	21	22	23	24	25	26	27
3	4	5	6	7	8	9	0
28	29	2a	2b	2c	2d	2e	2f
À	È	Ì	Ò	Ù	Á	É	Í
30	31	32	33	34	35	36	37
Ó	Ú	Â	Ê	Ô	Æ	Ã	
38	39	3a	3b	3c	3d	3e	3f
Ö	Ñ	Ç	ß	Ä	Ï	Ï	Û
40	41	42	43	44	45	46	47
Å	\$		¥		£	ı	ı
48	49	4a	4b	4c	4d	4e	4f
ø	“	:	’	.	,	/	-
50							
→							



PELCO-D protocol for RS-485/RS-232

Command	Output : PELCO-D	Description
Zoom +	FF 01 00 20 00 00 CS	
Zoom -	FF 01 00 40 00 00 CS	
Focus +	FF 01 01 00 00 00 CS	
Focus -	FF 01 00 80 00 00 CS	
Iris +	FF 01 02 00 00 00 CS	It is used for Menu
Iris -	FF 01 04 00 00 00 CS	
Stop	FF 01 00 00 00 00 CS	
Go To Preset	FF 01 00 07 00 zz CS	zz : preset no (00~FF)
Set Preset	FF 01 00 03 00 zz CS	total 256 zoom/focus position presets.
Clear Preset	FF 01 00 05 00 zz CS	Reserved presets : zz = 21, 5F, 60,62
Flip(180 rotate)	FF 01 00 07 00 21 CS	
Menu or SET	FF 01 00 07 00 5F CS	Menu command(Go to preset + 95)
Menu or SET	FF 01 00 07 00 60 CS	Menu command(Go to preset + 96)
Menu or SET	FF 01 00 03 00 62 CS	Menu command(Set preset + 98)
Zoom speed	FF 01 00 25 00 zz CS	zz = 00(slow)~03 (fast), default:02
Reset camera to default	FF 01 00 29 00 00 CS	Initialize camera settings
Auto focus auto/on/off	FF 01 00 2B 00 zz CS	zz = 00(auto),01(one push AF),02(one push mode), 03(manual)
Backlight on/off	FF 01 00 31 00 zz CS	zz = 01(on),02(off)
Auto white balance on/off	FF 01 00 33 00 zz CS	zz = 01(Auto WB mode),02(manual WB mode)
Set Shutter speed	FF 01 00 37 zz zz CS	zzzz : shutter speed (see. Shutter speed table)

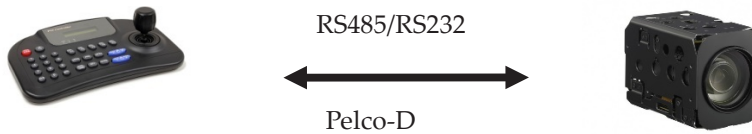

Supported DVRs

Since the color representation differs depending on the DVR, you have to select the type of DVR to use.

Video Output	HD-AHD	HD-TVI	HD-SDI	EX-SDI(V1.0)
Standard Device	STANDARD (*)	STANDARD(*)	STANDARD(*)	STANDARD(*)
	CVBS(*)	CVBS(*)	CVBS(*)	CVBS(*)
DVR manufacturer	RAYSHARP	HIK VISION (A/B)		
	TECHWIN	WEBGATE		
	FOCUS	RAYSHARP		
	3R			
	TAGATEC			

(*) STANDRAD : Standard Color

(*) CVBS : If you connect directly to a CVBS monitor, select "CVBS".

(*)Alternatively, you can change the color directly in the menu.



www.intertest.com

303 State Route 94
Columbia, NJ 07832 USA
Office: 908-496-8008
Toll Free (U.S.): 800-535-3626
Fax: 908-496-8004