

PROJECT: _____
 LOCATION: _____
 ITEM#: _____
 QUANTITY: _____

COMPETITOR SERIES®



FRYERS

- Robertshaw® brand electro-mechanical thermostat for adjusting temperatures within a range of 200°F to 400°F
- 34,000 BTU (natural gas) and 30,000 BTU (LP) per burner
- Beautiful ergonomic design and easy to clean
- All stainless steel tank & cabinetry
- Removable basket hanger for cleaning purposes
- Manual pilot ignition
- Auto reset high limit control for high temperatures
- Cooling zone inside the fryer tank
- Twin nickel chrome plated wire mesh baskets with blue plastic coated handles
- Built in flue deflector
- Full port drain within valve
- (4) adjustable stainless steel legs
- Comes in standard as natural gas or L.P
- Accessory: optional casters upon request
- Migali Industries® Protection Plan: 1 Year Parts & Labor Warranty, 5 Years Oil Tank Warranty

| MODEL | BURNERS | VOLUME | TOTAL BTU NATURAL GAS / LP | PER BTU NATURAL GAS / LP | IN TAKE TUBE PRESSURE (W.C.) NATURAL GAS / LP | NOZZLE NO. NATURAL GAS / LP | IGNITION | VALVE TYPE | THERMOSTAT TEMP LIMIT | TEMP LIMIT | EXTERIOR DIMENSIONS W X D X H | PACKAGING DIMENSIONS W X D X H | WEIGHT | PACKAGED WEIGHT |
|-----------------------|---------|---------|-------------------------------|-----------------------------|--|--------------------------------|----------|------------------------------------|-----------------------|------------|----------------------------------|-----------------------------------|----------|-----------------|
| C-F40-NG /C-F40-LP | 3 | 40 lbs. | 102,000 / 90,000 | 34,000 / 30,000 | 4 /10 | #36 / #52 | Manual | Often open flame, flame protection | 400° F | 450° F | 15.6 x 30.1 x 44.4 | 17.7 x 33.5 x 37.9 | 131 lbs. | 160 lbs. |
| C-F50-NG/ C-F50-LP | 4 | 50 lbs. | 136,000 / 120,000 | 34,000 / 30,000 | 4 /10 | #36 / #53 | Manual | Often open flame, flame protection | 400° F | 450° F | 15.6 x 30.1 x 44.4 | 17.7 x 33.5 x 37.9 | 144 lbs. | 171 lbs. |
| C-F75-NG /C-F75-LP | 5 | 75 lbs | 170,000 / 150,000 | 34,000 / 30,000 | 4 /10 | #36 / #54 | Manual | Often open flame, flame protection | 400° F | 450° F | 21.1 x 30.1 x 44.4 | 23.2 x 33.5 x 37.9 | 168 lbs. | 200 lbs. |

Gas Connection: 3/4" NPT on the right

Clearance for combustible work area: 6" rear & 15" sides

Altitudes over 2,000 feet may need high altitude orifice adjustments to deliver BTU output listed

*MIGALI RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE




TOLL FREE: 800.852.5292
 WEB: www.migali.com




DIMENSIONAL DRAWINGS






C-F40

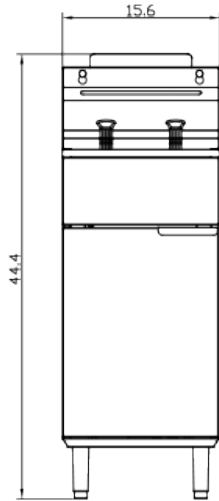

C-F50

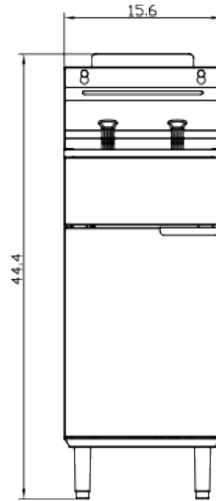

C-F75

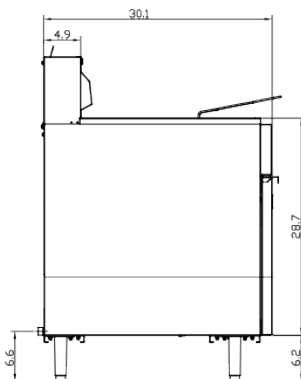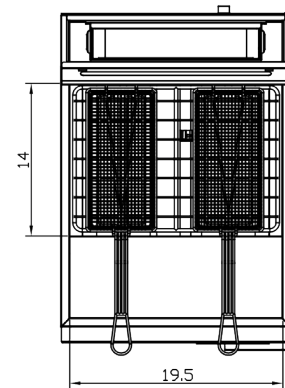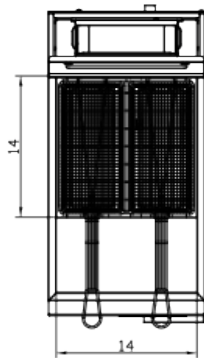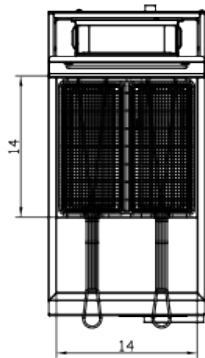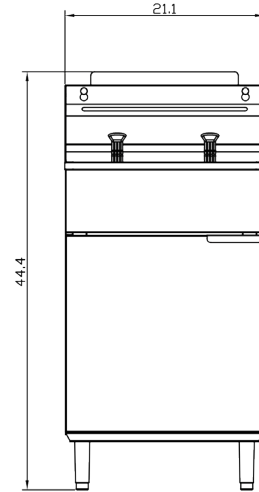

SIDE VIEW



MIGALI® REMAINS AN AMERICAN FAMILY COMPANY SINCE 1955