



|              |          |         |       |
|--------------|----------|---------|-------|
| PROJECT NAME | LOCATION |         | AIA # |
| ITEM #       | QTY      | MODEL # | SIS # |

# SPEC SERIES®

ROLL-IN SOLID SWING DOOR FREEZER

| models | STR2FRI-2S | STA2FRI-2S | STG2RRI-2S |
|--------|------------|------------|------------|
|--------|------------|------------|------------|




| STR2FRI-2S      |   |
|-----------------|---|
| <b>Exterior</b> | Stainless steel door, front & sides.                            |
| <b>Interior</b> | Stainless steel side walls, back, floor, door liner, & ceiling. |

| STA2FRI-2S      |   |
|-----------------|---|
| <b>Exterior</b> | Stainless steel door, front & sides.                            |
| <b>Interior</b> | Aluminum side walls & back.<br>Stainless steel floor & ceiling. |

| STG2FRI-2S      |   |
|-----------------|---|
| <b>Exterior</b> | Stainless steel door, with matching aluminum sides.             |
| <b>Interior</b> | Aluminum side walls & back.<br>Stainless steel floor & ceiling. |

## plan view

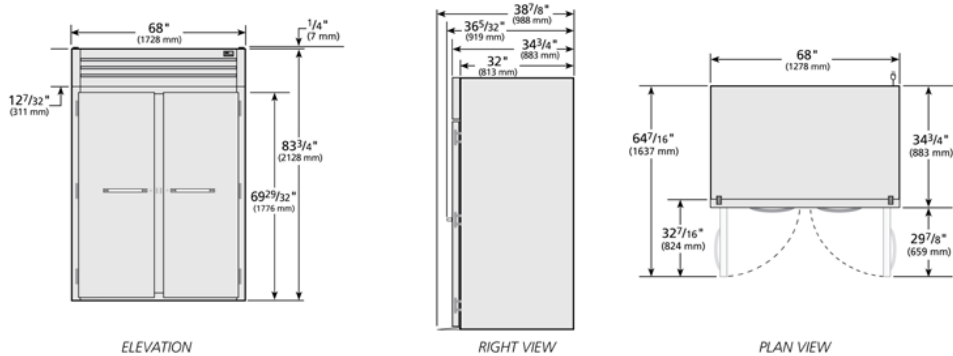

| SPECIFICATIONS   |                |                      |
|--|----------------|----------------------|
| Dimensions   | in.            | mm.                  |
| Length   | 68             | 1728                 |
| Depth  | 34 3/4         | 883                  |
| Height   | 83 3/4         | 2128                 |
| <b>Electrical</b>  | <b>U.S.</b>    | <b>International</b> |
| Horsepower   | 1 1/2          | N/A                  |
| Amps   | 8.0            | N/A                  |
| Voltage  | 115/208-230/60 |                      |
| NEMA   | 14-20P         |                      |
| Cord Length  | 9 ft.          | 2.74 M.              |
| 115/208-230/1<br>NEMA-14-20R   |                |                      |
| † Depth does not include 4 1/4" (108 mm) for ramp.<br>* Height does not include 1" (26 mm) for system mechanical components.<br>Note: Requires 115/208-230/60Hz, single phase, 3 pole, 4 wire circuit. |                |                      |

Specifications subject to change without notice.  
 Chart dimensions are rounded up to the nearest 1/8" (millimeters rounded up to the next whole number).

|      |                   |                     |
|------|-------------------|---------------------|
|      | <b>APPROVALS</b>  | <b>AVAILABLE AT</b> |
| 8/14 | Printed in U.S.A. |                     |



|              |          |         |
|--------------|----------|---------|
| PROJECT NAME | LOCATION | AIA #   |
| ITEM #       | QTY      | MODEL # |
|              |          | SIS #   |

# SPEC SERIES®

ROLL-IN SOLID SWING DOOR FREEZER

|        |            |            |            |
|--------|------------|------------|------------|
| models | STR2FRI-2S | STA2FRI-2S | STG2FRI-2S |
|--------|------------|------------|------------|



## standard features

### REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) 404A refrigerant.
- Extra large evaporator coil balanced with higher horsepower compressor and large condenser maintains -10°F (-23.3°C) cabinet temperature. Ideal for both frozen foods and ice cream.
- Sealed, cast iron, self-lubricating evaporator fan motors and larger fan blades give True roll-in's a more efficient low velocity, high volume airflow design. This unique design ensures faster temperature recovery and shorter run times in the busiest of foodservice environments.
- Top mounted refrigeration system with evaporator positioned out of food zone to maximize capacity.
- Automatic defrost system time-initiated, temperature-terminated. Saves energy consumption and provides shortest possible defrost cycle.
- Automatic evaporator fan motor delay during defrost cycle.

### CABINET CONSTRUCTION

- Insulation - entire cabinet structure and solid door are foamed-in-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Designed to accept roll-in racks (inboard castors) with maximum dimensions of 27"L x 29"D x 66"H (686 mm x 737 mm x 1677 mm) (supplied by others).
- One (1) heavy gauge stainless steel ramp.

### DOORS

- Lifetime guaranteed bolt style door locks standard.
- Lifetime guaranteed heavy duty all metal working door handle.
- Positive seal self-closing door with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, Three (3) per door section.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.

### LIGHTING

- Incandescent interior lighting, safety shielded.

### MODEL FEATURES

- Exterior digital temperature display, available with either °F or °C .
- Evaporator epoxy coated to eliminate the potential of corrosion
- Backguard improves airflow.
- Interior bumpers protect cabinet walls from abuse caused by roll-in carts.
- NSF-7 compliant for open food product.

### ELECTRICAL

- Unit completely pre-wired at factory and ready for final connection to a 115/208-230/60Hz single phase, 3 pole, 4 wire, 20 amp dedicated outlet. Cord and plug set included.

### OPTIONAL FEATURES/ ACCESSORIES

(upcharge & lead times may apply)

- Stainless back. (STR, STA, STG)
- Field reversible hinge

#### WARRANTY\*

Three year warranty on all parts and labor and an additional 2 year warranty on compressor. (U.S.A. only)

\*RESIDENTIAL APPLICATIONS: TRUE assumes no liability for parts or labor coverage for component failure or other damages resulting from installation in non-commercial or residential applications.

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



| Model        | Elevation | Right | Plan | 3D | Back |
|--------------|-----------|-------|------|----|------|
| ST( )2FRI-2S |           |       |      |    |      |