


KEFEYA Portable Triple Screen Extender

Packing List


Unpack the package and inspect the contents. If anything is missing or damaged, please contact us at service@kefeya.com.



HOST
Item 1



HDMI to MINI HDMI
Item 2



USB-C to USB-C x2
Item 3




POWER
Item 4



HUB
Item 5

These Ports You Need to Know

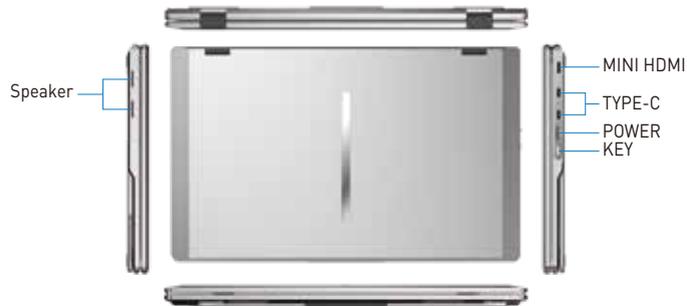

Key Definitions

Menu/Selection/Confirmation Button

Press and hold for 2 seconds to return. Press and hold for 3 seconds to shut down




Toggle right "Plus" Volume Adjustment Toggle left "Minus" Backlight Adjustment



Operation Steps



The maximum opening angle of the screen is 340°. It is strictly prohibited to fold it excessively. Please open and close it gently.

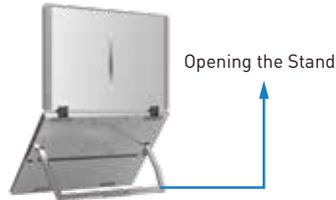


To open the stand, you can adjust it to a maximum angle of 135°.

How to Connect


TYPE-C Connection:

If your laptop has one full-featured Type-C port, you can connect the M2 directly to your laptop with one Type-C cable.

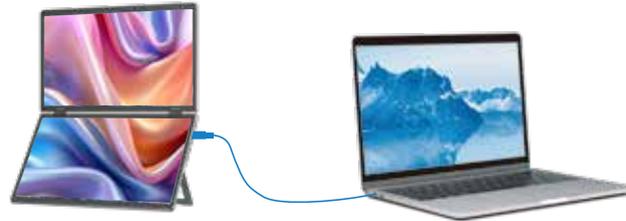

HDMI Connection:

If your laptop has an HDMI interface, you can connect the M2 to your laptop using an HDMI cable. To power the M2, you can use a USB-C to USB-C adapter and connect it to the M2.

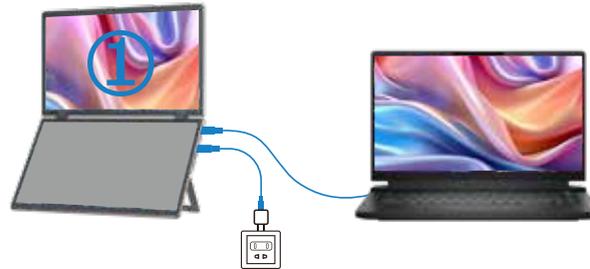


Note: When using an HDMI connection, the content will only be displayed on the primary screen.

Notice: If the display has no signal or the signal is unstable after connection, please connect an external 12V/1.25A power adapter to power the laptop.

HUB Connection

If your device is with Mac OS, you will need to connect the dedicated M2 model hub to activate both screens. Please follow the steps below:

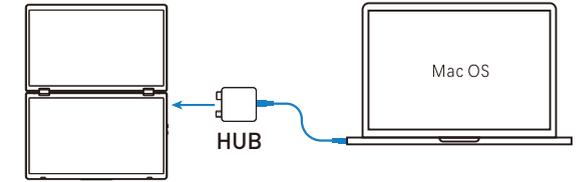

please follow these steps:

1. Connect the HUB to the M2 using the Type-C and Mini HDMI interfaces.
2. Use a USB-C to USB-C cable to connect your computer's Type-C interface.
3. Use a USB-C to USB-C cable to provide power to the product through the adapter.
4. Locate the "USM USB display" driver installation file on your computer and follow the prompts to install the driver. Once the installation is complete, both screens light up.

Note: The USB/Type-C interface on your computer must meet or exceed the USB 3.0 transfer rate.

Q&A

Q1: How can I tell if the USB-C port on my computer is full-featured?

A1: A USB-C port with one of the following symbols is a full-featured one. Thunderbolt 3 or Thunderbolt 4 ports are also full-featured ports. You can view the port parameters in the manual or on the Web.



Q2: Why does one monitor show "No Signal" ?


A2: There may be a connection failure or the computer port does not support video output. Please contact us for troubleshooting. We will provide you with a solution as soon as possible!

Q3: The screen does not light up after connecting, what should I do?

A3: It is possible that your computer does not have enough power. Please charge the monitor with an external power supply that provides 5V/2A power. You can also contact us for further solutions.

Tips for Use

Please refer to the pictures below to plug and unplug the data cable to avoid damage.

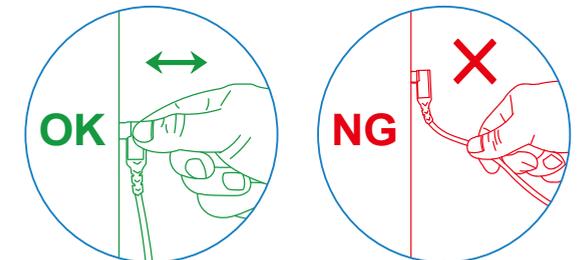

For more detailed information, please refer to the product brochure.