



SOLAR TRIPLE HEAD SECURITY LIGHT - BLACK



the bright way to do home security.

PLEASE READ CAREFULLY AND SAVE THESE INSTRUCTIONS, AS YOU MAY NEED THEM AT A LATER DATE.

 **IMPORTANT SAFETY OPERATING INSTRUCTIONS**

1. Please read all warning and instruction labels which are included in the box and fixture to avoid personal injury, property damage caused by fire, cuts, bruises, death and other dangers.
2. Please follow these general precautions before installing, maintaining, or fixing


 **WARNING**

1. The packing contains small parts that could be swallowed by children
2. Keep the packaging material away from children and pets
3. The solar light is not a toy
4. We do not take responsibility if the instruction manual is not followed correctly or if the product is handled improperly resulting in damage to person or property

PRECAUTION

1. It is important to select an outdoor location with full, direct sunlight where the solar panel can receive at least 8 hours of sunlight each day.
2. It is important to avoid placing the solar light by light sources, such as street lights or porch lights, which may cause the solar light to turn off automatically.
3. To avoid explosion and corrosion, please keep the solar light away from fire and humid environment.
4. No striking to avoid any damages to solar cell.


REF. PARTS



1pc X Light fixture



1pc X Solar panel



1pc X Wall mounting plate



6pcs X Screws



6pcs X Plastic anchors (Φ 0.23inch)


PARAMETER

1. Light Source: up to 1800lumens / 3000-3500K
2. Power Supply: 1pc X 3.7V 2000mAh Li-ion rechargeable battery
3. Detect Distance: 49ft/180 degree
4. Light Duration: TEST/30S/60S/120S

HOW TO OPERATE AND INSTALL LIGHT FIXTURE



Part 1: Operation

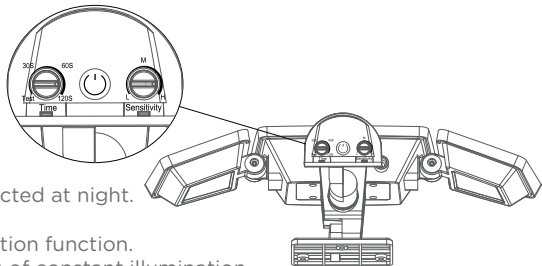

Mode Button:

Press once, it will enter “Auto” mode:

light will be on automatically when motion is detected at night.

Press twice, it will enter “ON” mode:

The “ON” mode acts to override the motion activation function.

This will allow a limited period (about 85 minutes) of constant illumination.

Press three times, it will enter “OFF” mode, light shuts off.

Time Dial:

Determines the duration of the light once motion is detected: 30 seconds, 60 seconds or 120 seconds.

- **TEST:** Allows the light’s motion sensor to be tested day or night.

Once the motion sensor is in the desired position, attempt to trigger the light by moving in the intended detection zone.

If the light illuminates, the motion sensor is positioned correctly.

You are now ready to move the switch to the preferred duration option.

The light will now only turn on in darkness.

Sensitivity Dial:


Controls the distance of the range of motion detection: low, medium or high.

HOW TO OPERATE AND INSTALL LIGHT FIXTURE

RECOMMENDED INSTALL HEIGHT


8-11.5 feet above the ground.

At such a height, the fixture will provide a detection distance of up to 49 feet at 77 degrees Fahrenheit.



The motion sensor is the most sensitive as a person or object moves parallel to the sensor head.

The motion sensor is the least sensitive if a person or object moves directly at the sensor head.

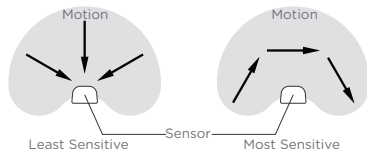


Part 2: Installation

Choose desired mounting location.


Recommended Tools(not included): Power Drill, Phillips Screwdriver, Ladder

Important:


1. Ensure your solar panel is placed where it is exposed to optimum sunlight. Be aware of objects such as trees or property overhangs that may impede the panel's ability to generate a charge.
2. Make sure the remote solar panel and installed light fixture can be wired together with the 10ft cable




1. Use a power drill (not included) to create the holes on your chosen mounting surface.



2. Fasten the solar panel and wall mounting plate with included plastic anchors and screws to your desired surface.




3. Slide the fixture downward securely onto the wall mounting plate.




4. Connect the wire from the solar panel into the socket located under the light fixture. Your solar motion light will now begin to charge.

HOW IT WORKS



1. Solar panel collects sunlight to charge the battery (included) during the day

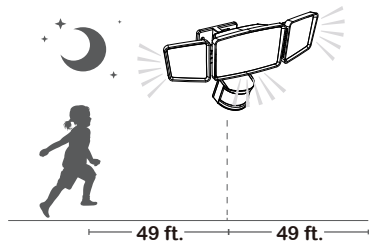

2. Automatically turns on at night when motion is detected, Duration time can be set with 30s/ 60s/ 120s

CLEANING AND MAINTENANCE

1. Use a damp cloth to clean the solar panel
2. To avoid any damage to this light, please do not use any chemical or abrasive cleaner

BATTERY

This product contains (1) 3.7V 18650 2000mAh Li-ion rechargeable battery.

When the battery expires, it must be recycled or disposed of properly.

Please contact your local disposal authority for correct procedure. Do not put battery into fire.


BATTERY REPLACEMENT

- Use a screw driver to remove the 4 screws on the back of the light head.
- Open the battery chamber cover.
- Replace the old battery with new battery making sure the polarity is correct.
- Place back the battery chamber cover by tightening the 4 screws.

Note: the rechargeable Li-ion battery on the center of battery compartment must be replaced with a new 18650 li-ion, 3.7V 2000mAh rechargeable battery.

- Do not mix old and new batteries.
- Do not mix alkaline, standard (carbon-zinc) or rechargeable batteries.
- Exhausted battery is to be removed from the product.

 Warning, only rechargeable battery should be used.

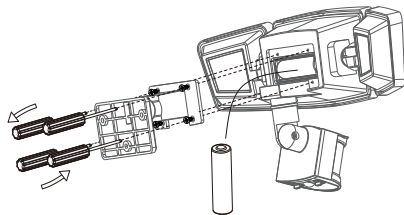

Register & Subscribe today to protect your investment and join our email list!



Why Register?

- Receive your extended warranty
- Get professional warranty support
- Be the first to hear the latest product news.
- Get exclusive deals delivered to you email.

Scan below for link:



homezonesecurity.com
support@homezone-usa.com
US: +1 888-782-5618

Get exclusive offers and deals when you subscribe!

Thank you for choosing Home Zone Security!
We are here to support you every step of the way.

Please be sure to contact our customer support for troubleshooting and register your product for additional benefits. Products must be sold by an authorized reseller or distributor to be valid.