


# Connect Printer to Cura

The first way : The network connection




Step1: After configuring the network through the webpage or Wiibuilder, obtain the IP address. (See “How to connect network” for details)




Step2: Open the Cura(ENTINA). Click “Manage printers”, add “X40” .

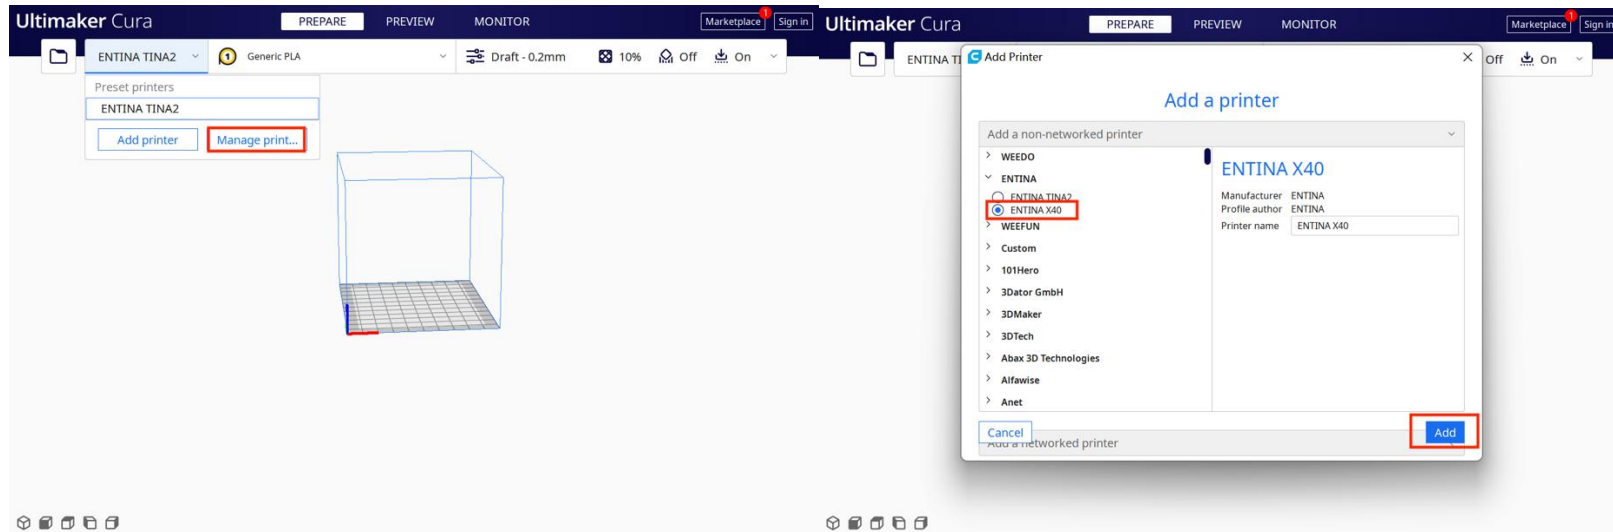

Step3: Click “Connect OctoPrint ” ,enter the IP address, and take a name. Cli “Ok”

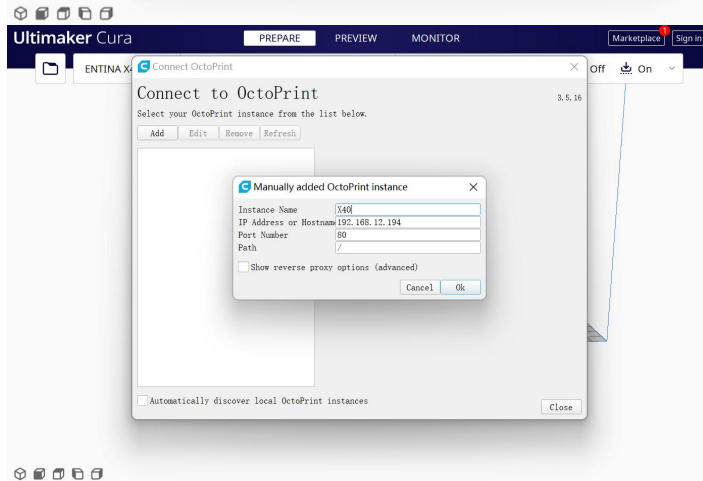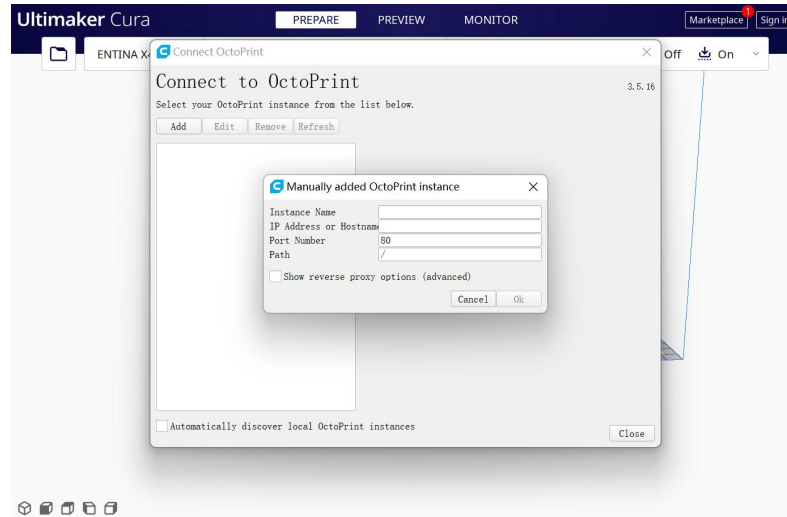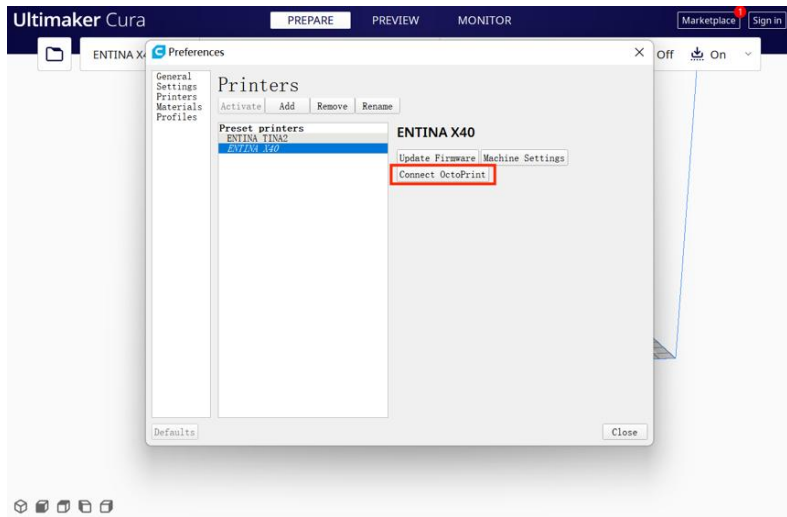

Step4: Click “Connect ”, start to “MONITOR”.

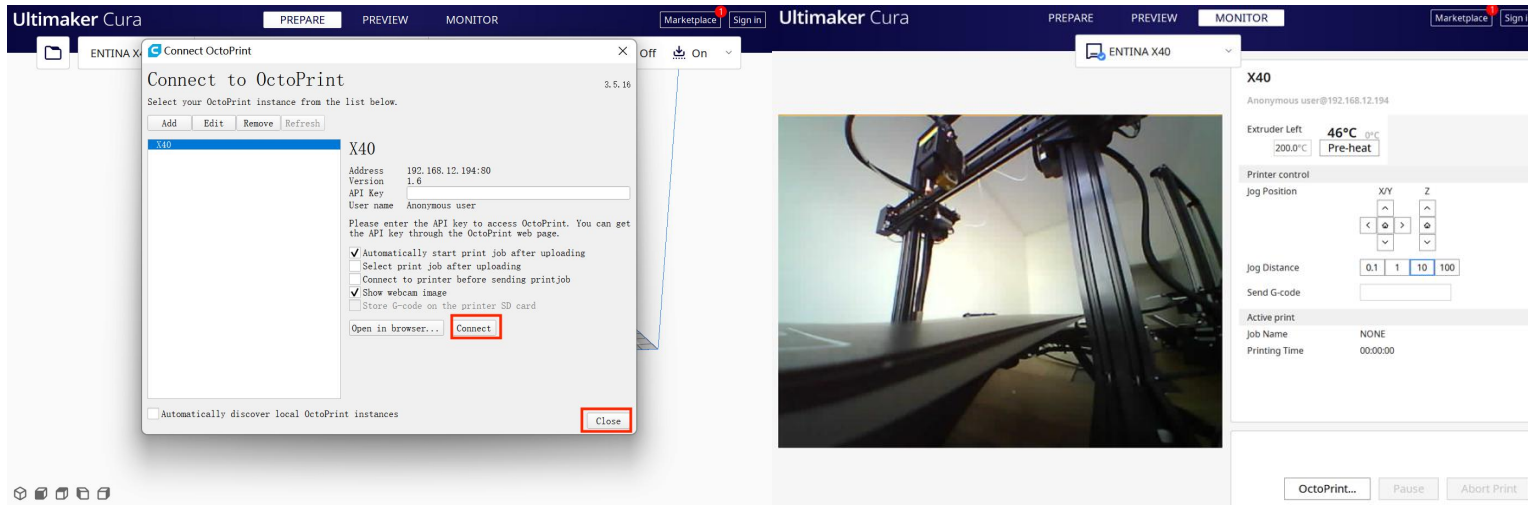


## The second way : USB cable connection

Step1: Connect the printer and computer with a USB cable.

Step2: You need to download the CH340 driver (on the download page) for the first connection.



Step3: Open the Cura(ENTINA). Click “Manage printers”, add X40

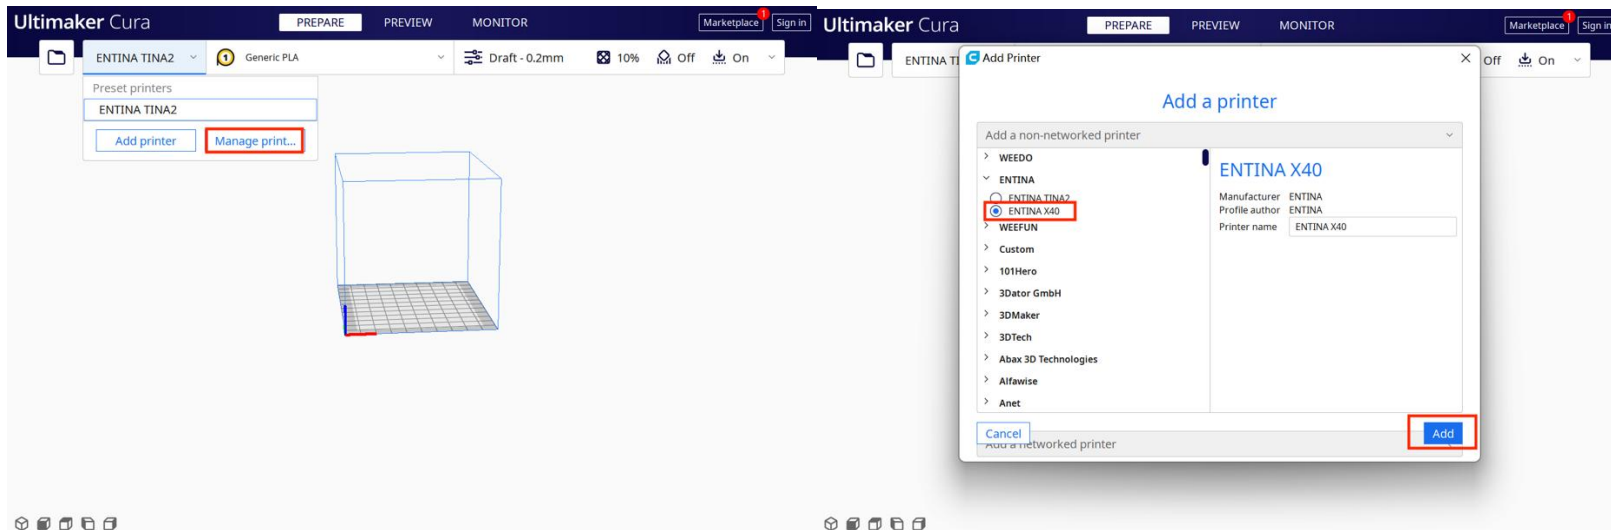

Step4: Click “Add ”, start to “MONITOR” .

