


Lindo

User Manual

Intelligent Battery Spotlight Camera 2K

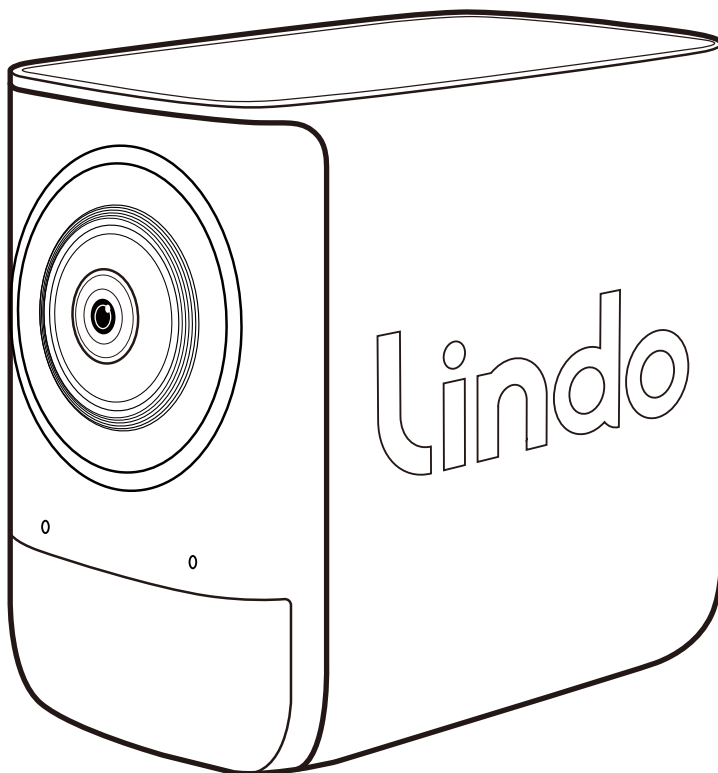


Contents

1. What's Included	4
For Outdoor Camera Installation.....	4
2. Product Overview	5
Intelligent Battery Spotlight Camera 2K Front View.....	5
Learn About the LED Indicator Light Status and Voice Prompt of the Device.....	6
3. Charging the Device	7
Charging the Device.....	7
Charging the Device with Solar Panel.....	8
4. How the System Works	9
How the System Works.....	9
5. Set up the System	10
Download the App and Set up the System.....	10
6. Add Device	11
Create Account.....	11
Activate Device.....	11
Bluetooth Connection.....	12
Wi-Fi Connection.....	13
7. Mounting the Camera	15
Select a Location.....	15
Wall Mounting.....	16
Ceiling Mounting.....	23


8. APP Page Guide	30
Home Page.....	30
Battery Level and Signal Reminder.....	31
Live View Page.....	32
9. NOTICE	34
FCC Statement.....	34
FCC Radiation Exposure Statement.....	35
Notice: Charging Statement.....	35
Customer Service.....	35

1. WHAT'S INCLUDED


For Outdoor Camera Installation




Intelligent Battery
Spotlight Camera 2K




Knob




Mounting Bracket




Screw Packs (Spare
screws and anchors are
included)



C-C Charging Cable



Screw Hole
Positioning Card




User Manual


2. PRODUCT OVERVIEW

Intelligent Battery Spotlight Camera 2K

Front View:

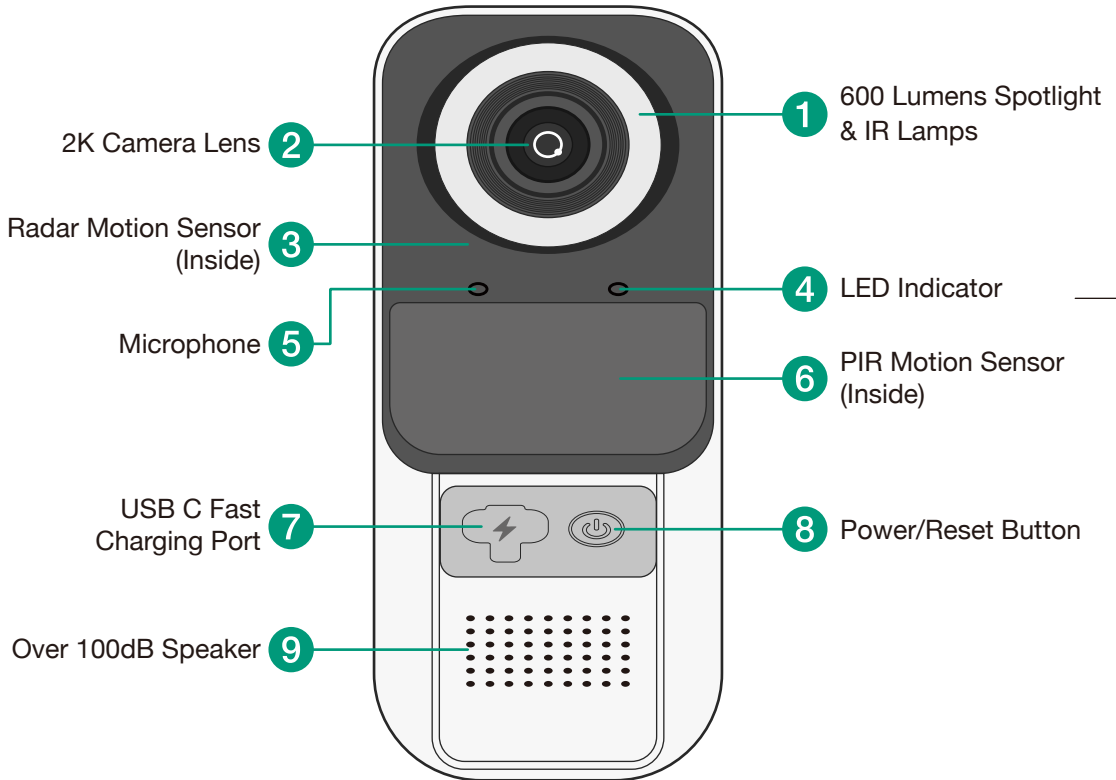

Learn About the LED Indicator Light Status and Voice Prompt of the Device

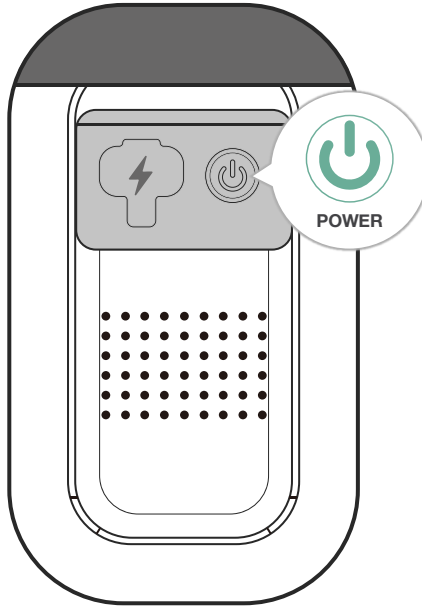


Description	Operation	LED Indicator Light Status	Voice Prompt
Ready to Connect to the Internet	Press the POWER button for 3 seconds	LED light flashes Red & Blue alternatively	A beep
Turn on the Device	Press the POWER button for 3 seconds		"Welcome to Lindo"
Turn off the Device	Press the POWER button 5 times in 5 seconds		A piece of music
Reset the Device	Press the POWER button for 7 seconds	LED light flashes Red & Blue alternatively	"Restore default setting"
Firmware Updating		Red & Blue lights on	
Network Disconnected		Red light flashing slowly	—

3. CHARGING THE DEVICE

Charging the Device

Please fully charge the device before first use.

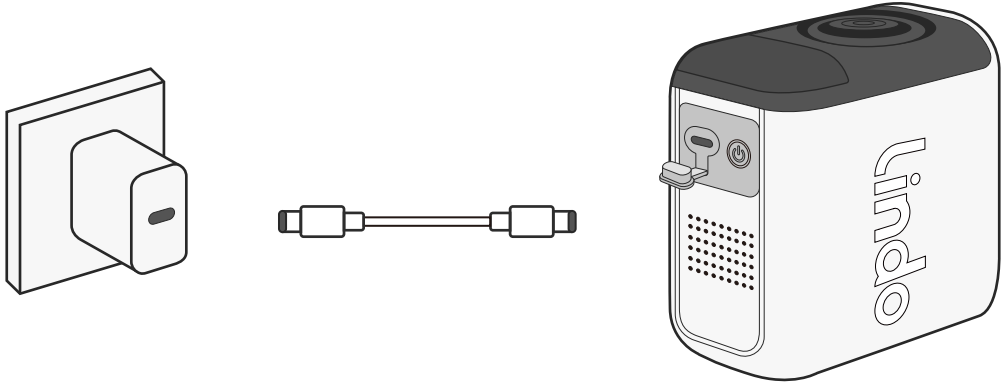

LED indicator

Charging: Blue light keeps on


Fully charged: Blue light turns off

Charging time

3 hours from 0% to 100%

Charging the Device with Solar Panel

Extend the battery life with Lindo Solar Panel (sold separately).

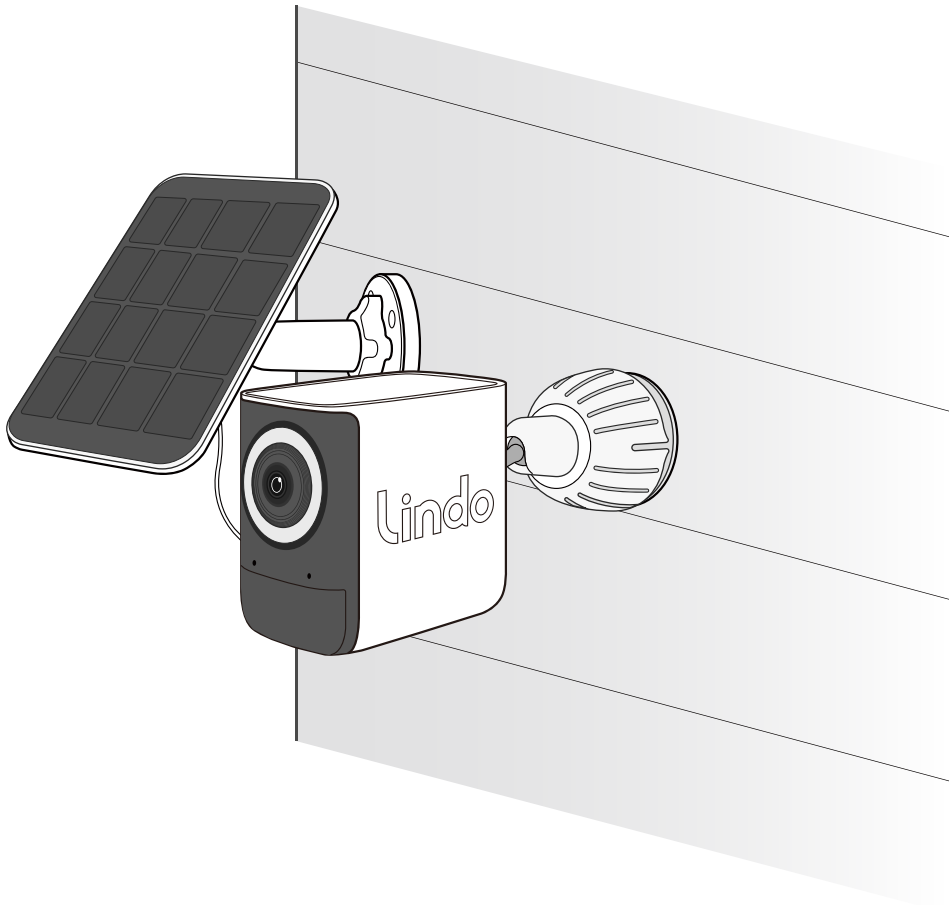


** This page only shows the option to charge the camera with Lindo solar panel. Lindo solar panel is sold separately and is not included in this package.*

4. HOW THE SYSTEM WORKS

HOW THE SYSTEM WORKS

The camera detects motion at your porch and allows you to warn the thieves.

If the distance between the location where your camera is installed and the router exceeds 20ft, you should add a repeater between them.

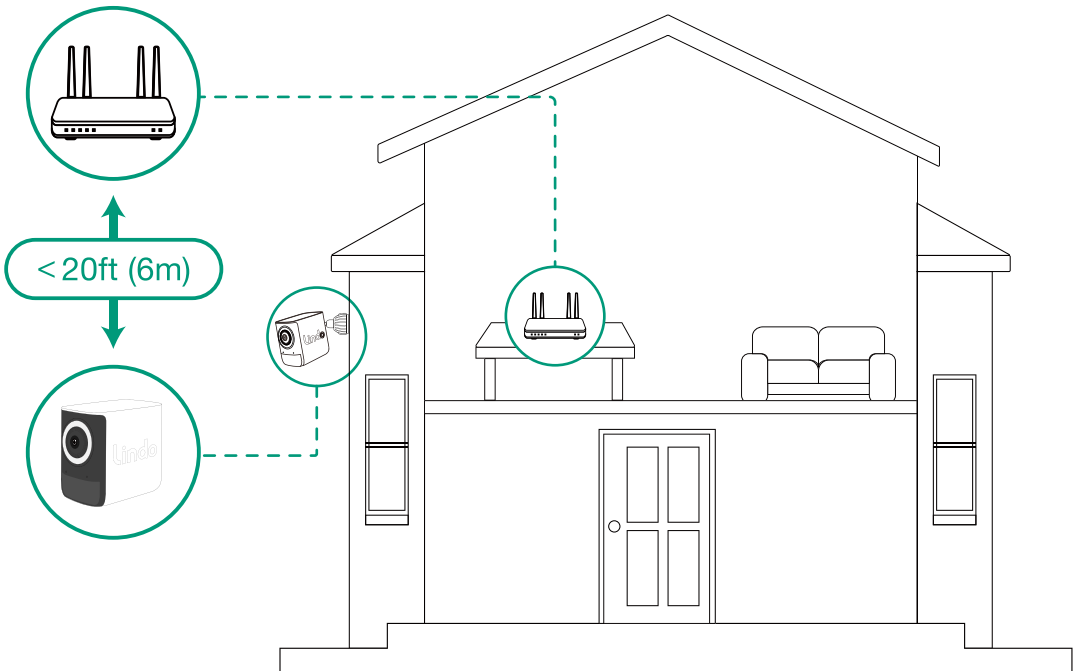

5. SET UP THE SYSTEM

Download the App and Set up the System

Download the Lindo Life app from the App Store (iOS devices) or Google Play (Android devices).



Sign up for a Lindo Life account, then follow the onscreen instructions to complete the setup.



6. ADD DEVICE

Create Account

1. Choose region
2. Fill in your email
3. Set your password (8-20 characters)


Activate Device

1. Press the “**POWER**” button until your hear a BEEP,
Led light flashes **Red** and **Blue** alternatively.



Bluetooth Connection

1. Click on the Bluetooth name to start Bluetooth pairing.

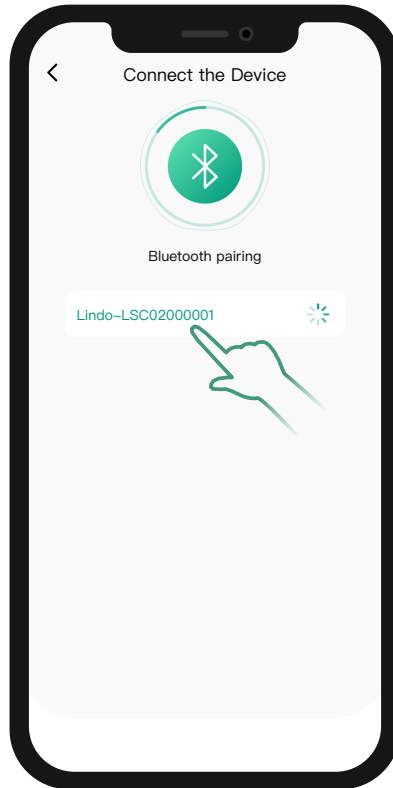


Wi-Fi Connection


1. Select your Wi-Fi (only support 2.4GHz).

2. Enter Wi-Fi password.

* *If you cannot find your Wi-Fi in the Wi-Fi list, manually enter your Wi-Fi to get connected.*

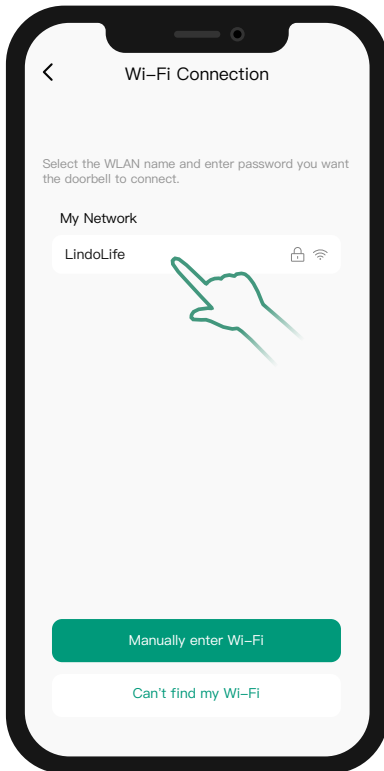


1

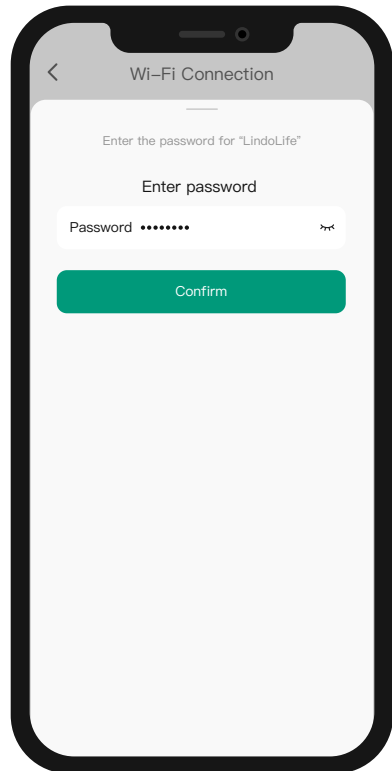


2

Wi-Fi Connection

1. Waiting for doorbell configuration.
2. After the configuration is completed, you can set the device name and enter the APP home page.
3. If you want to go through the installation tutorial, click the "Device Installation" at the bottom.

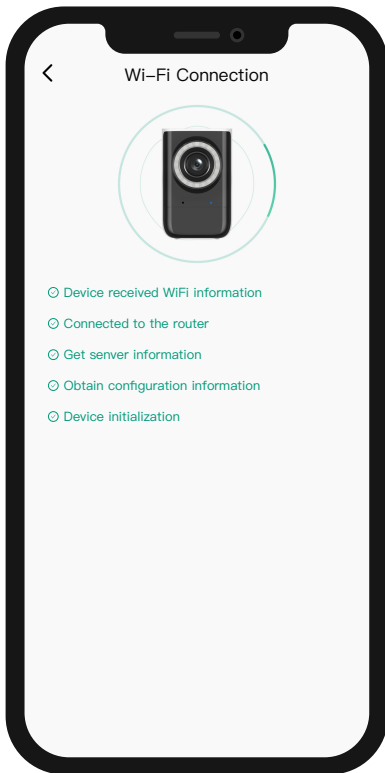

1

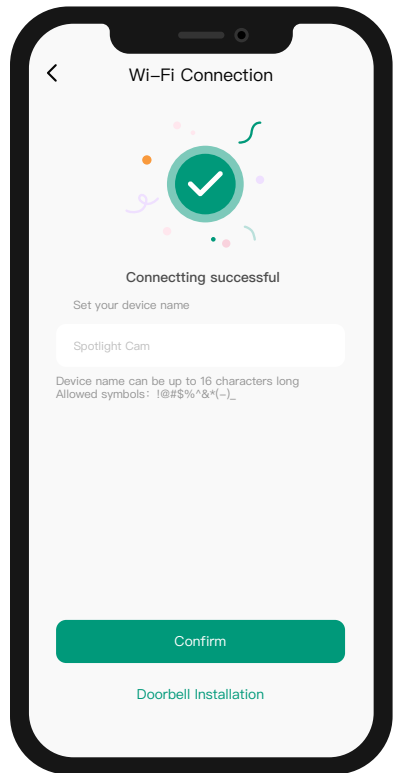


2

7. MOUNTING THE CAMERA


Select a Location

Select a location where you can get the desired view.
We recommend hanging the camera 7-10ft (2-3m) above the ground.

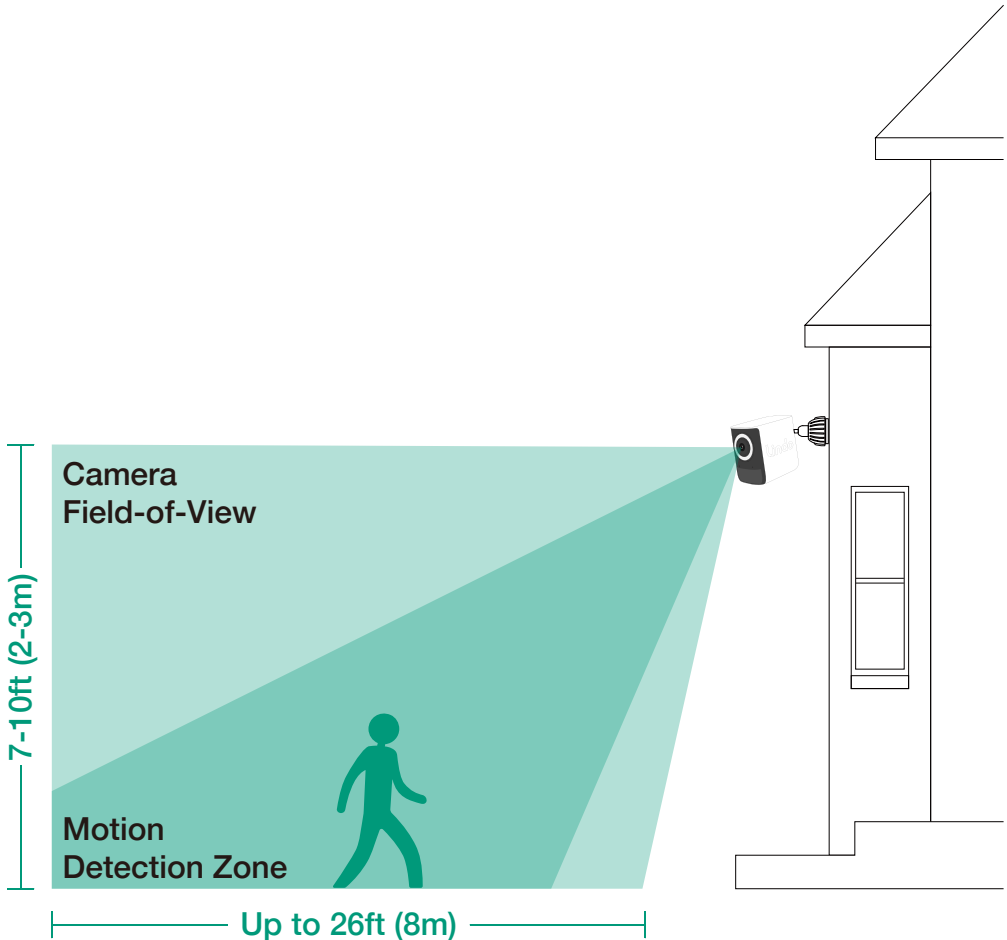


Wall Mounting

Turn the knob of the mounting bracket counterclockwise to loosen and disassemble it.


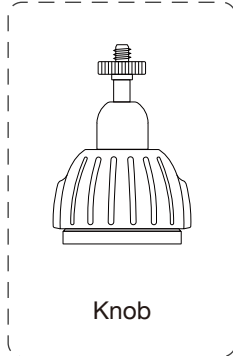


What you need: Knob.

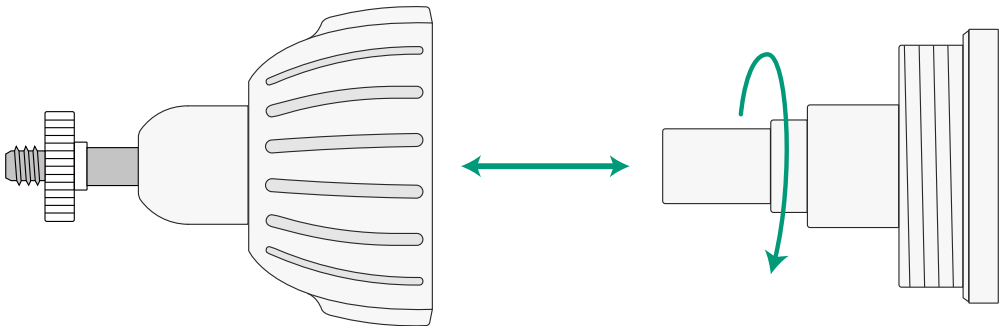


Wall Mounting

Place the screw hole positioning card against the wall to mark the position.

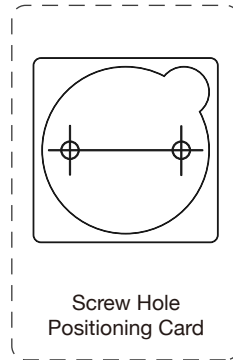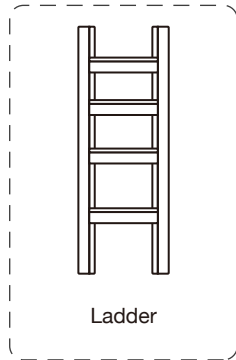


What you need: Ladder, Screw Hole Positioning Card.

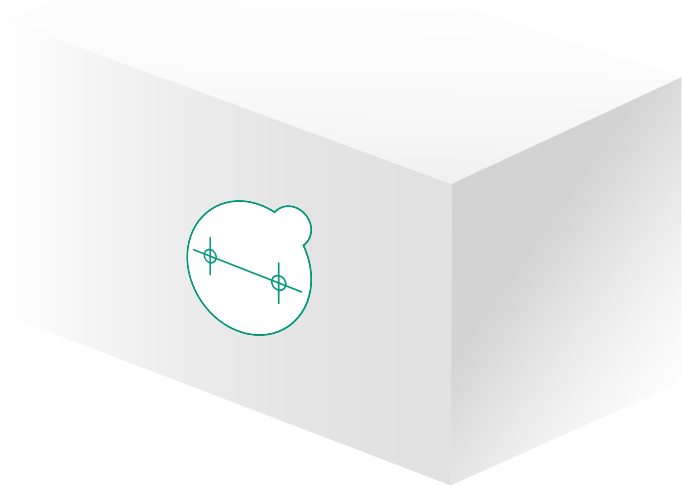


Wall Mounting

Drill holes with a 15/64 inch (6mm) drill bit, then insert the anchors into the holes, anchors are necessary for walls that are made out of hard materials such as concrete, brick, or stucco.

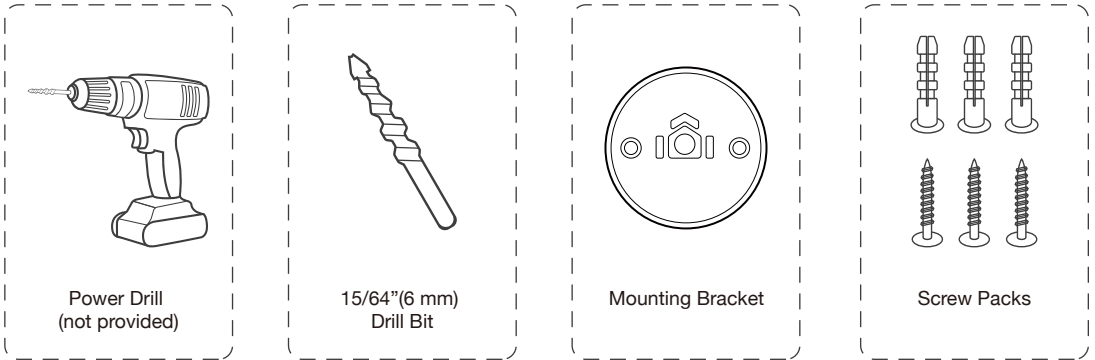


What you need: Power Drill, 15/64" (6 mm) Drill Bit, Mounting Bracket, Screw Packs.

1

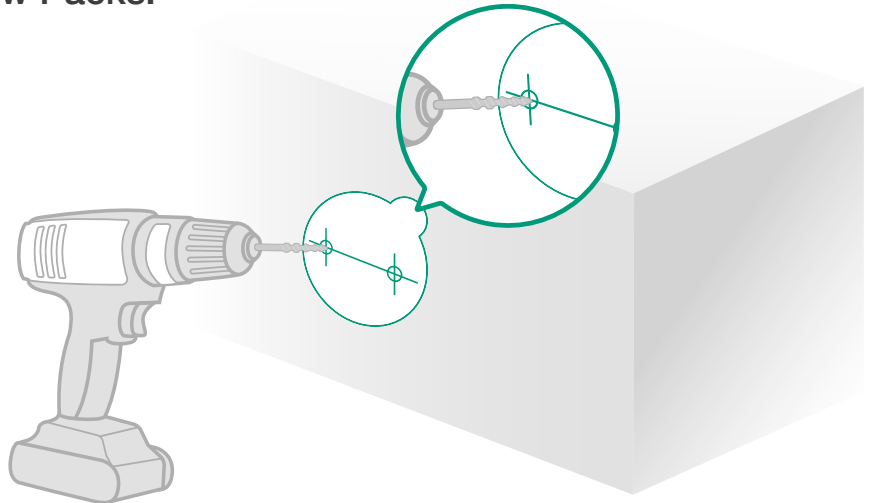


Use the screws to secure the mounting bracket on the wall.

2


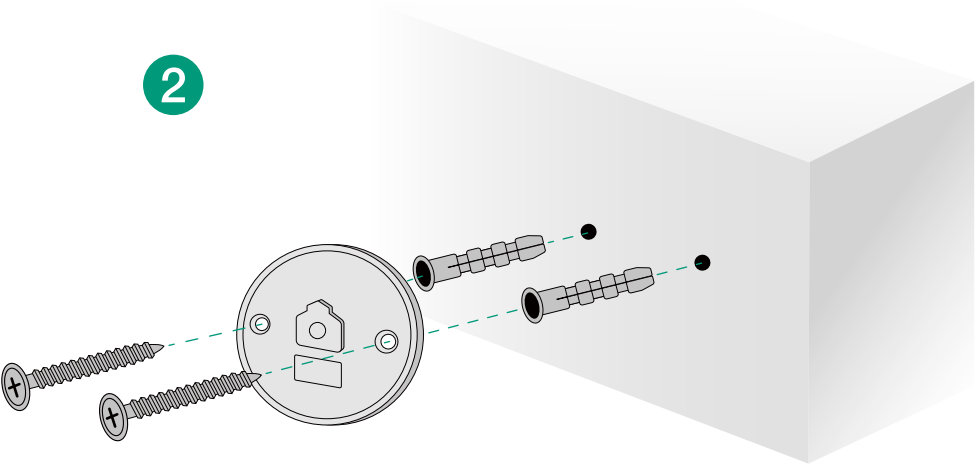


3

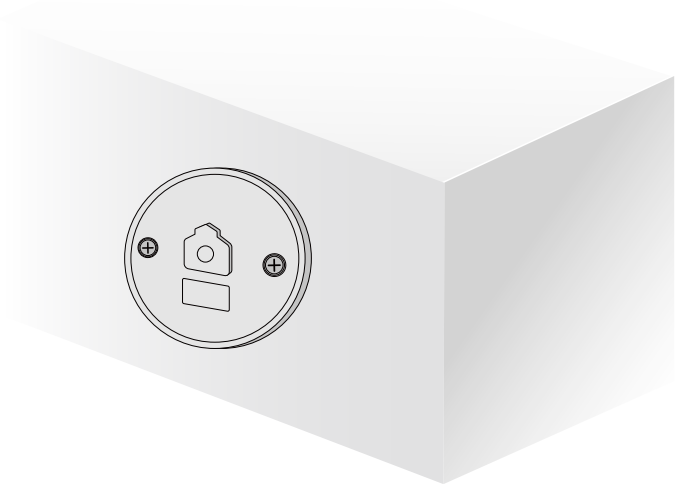


Wall Mounting

Firmly screw the knob of the mounting bracket into the mounting hole.

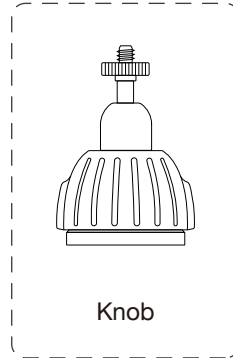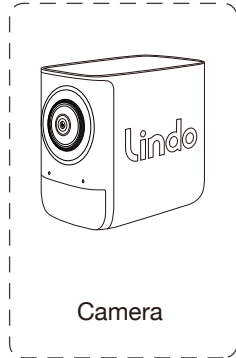


What you need: Ladder, Screw Hole Positioning Card.

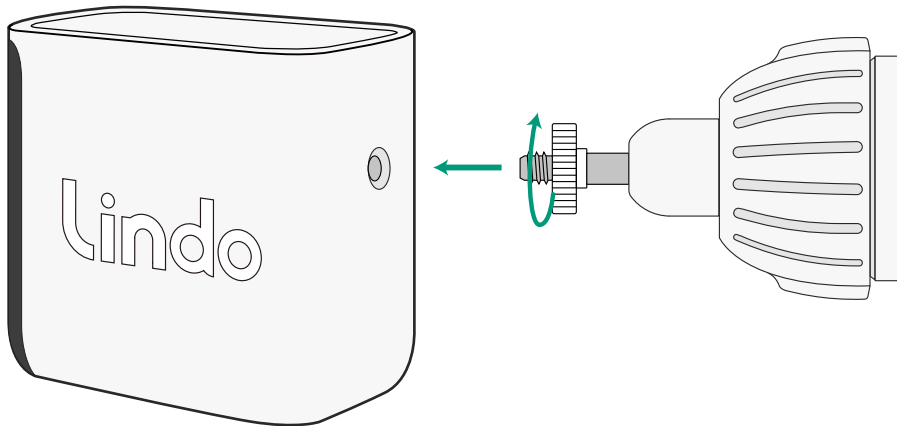

Wall Mounting


Hold and snap the camera to the mounting bracket.

1

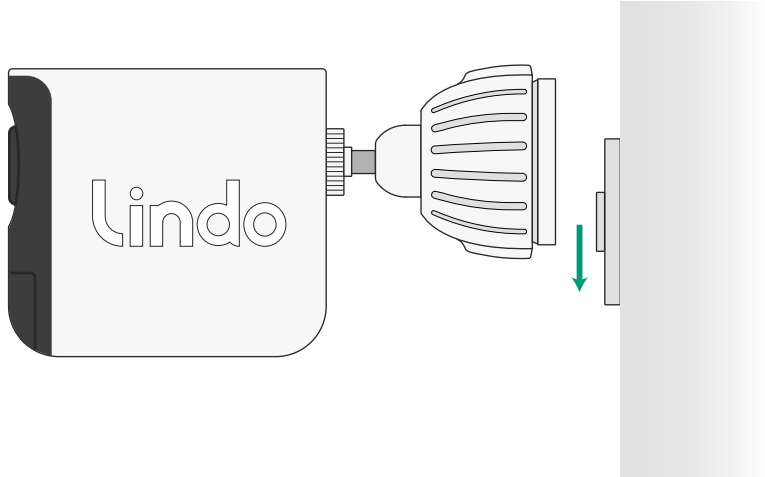


Unscrew the knob to adjust the mounting angle.

2

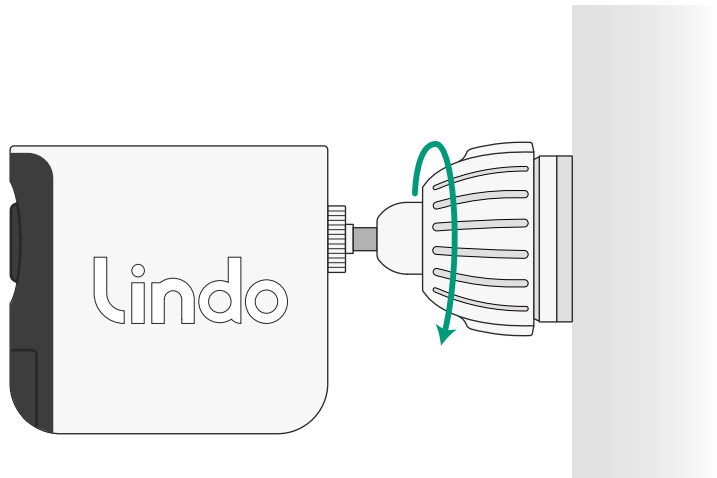


Then firmly screw the knob.

3

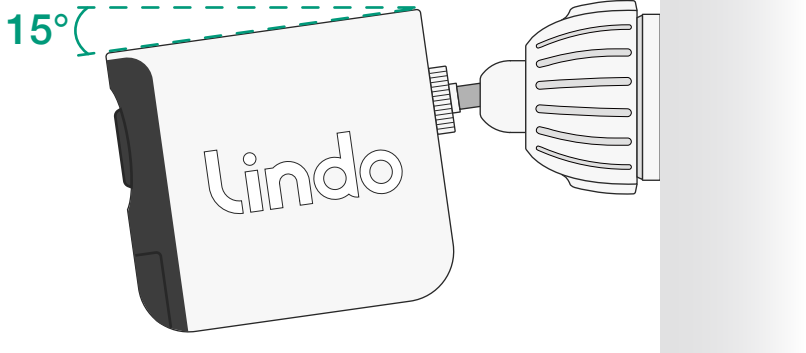


View and check the view of the live stream and signal strength in Lindo Life app.

4

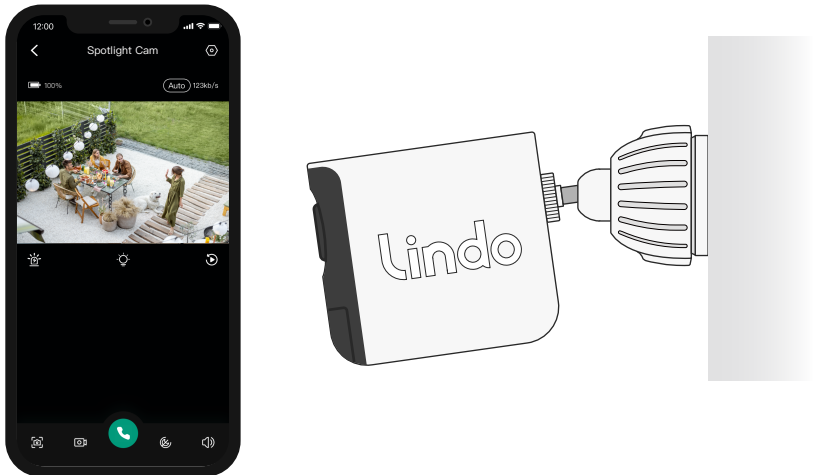


Ceiling Mounting

Turn the knob of the mounting bracket counterclockwise to loosen and disassemble it.


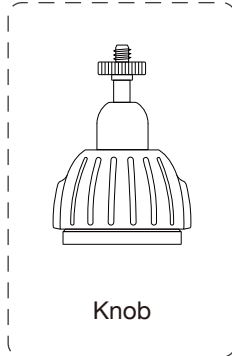


What you need: Knob.

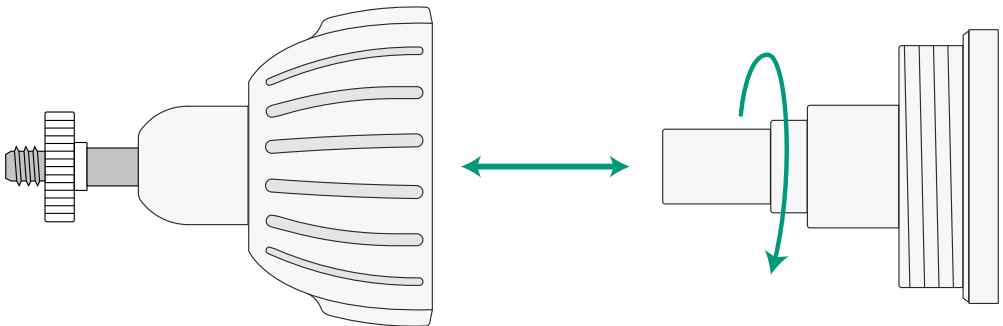


Ceiling Mounting

Place the screw hole positioning card against the wall to mark the position.



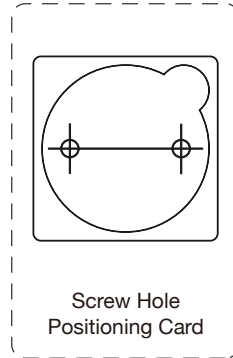
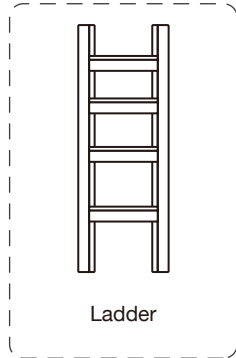


What you need: Ladder, Screw Hole Positioning Card.

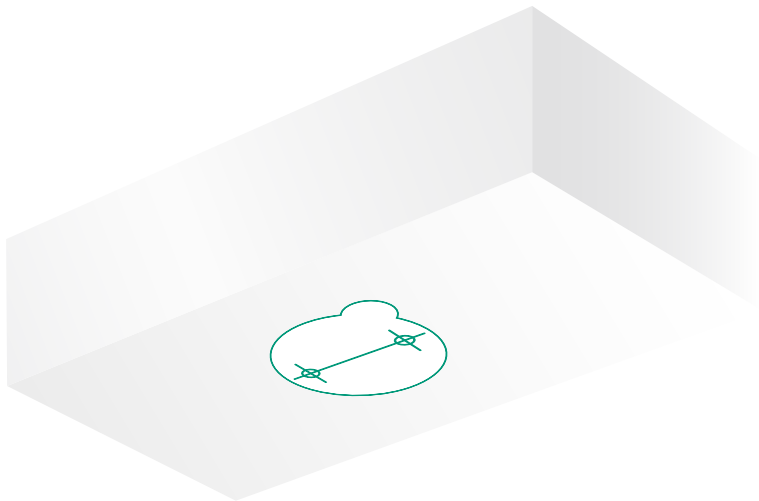


Ceiling Mounting

Drill holes with a 15/64 inch (6mm) drill bit, then insert the anchors into the holes, anchors are necessary for walls that are made out of hard materials such as concrete, brick, or stucco.

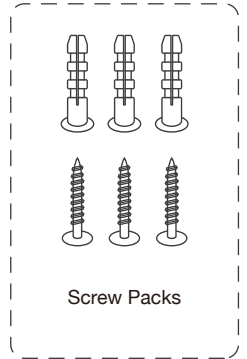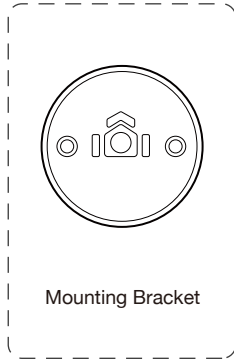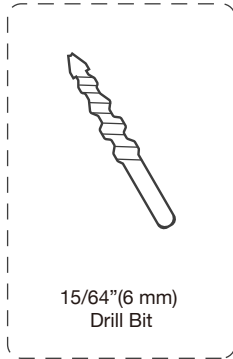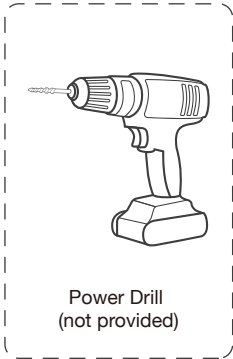


What you need: Power Drill, 15/64" (6 mm) Drill Bit, Mounting Bracket, Screw Packs.

1

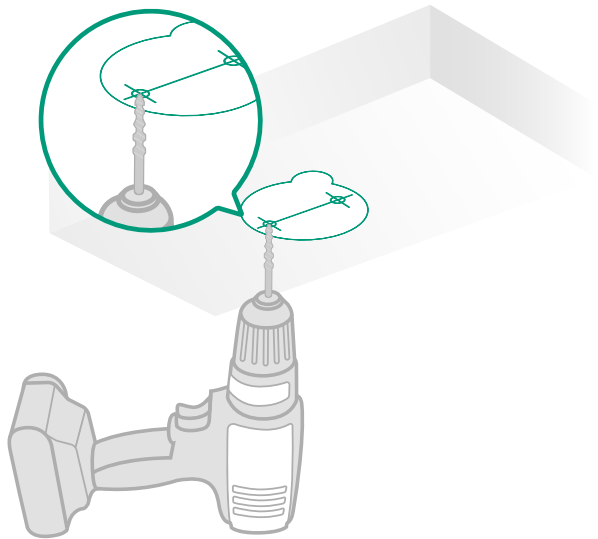


Use the screws to secure the mounting bracket on the wall.

2


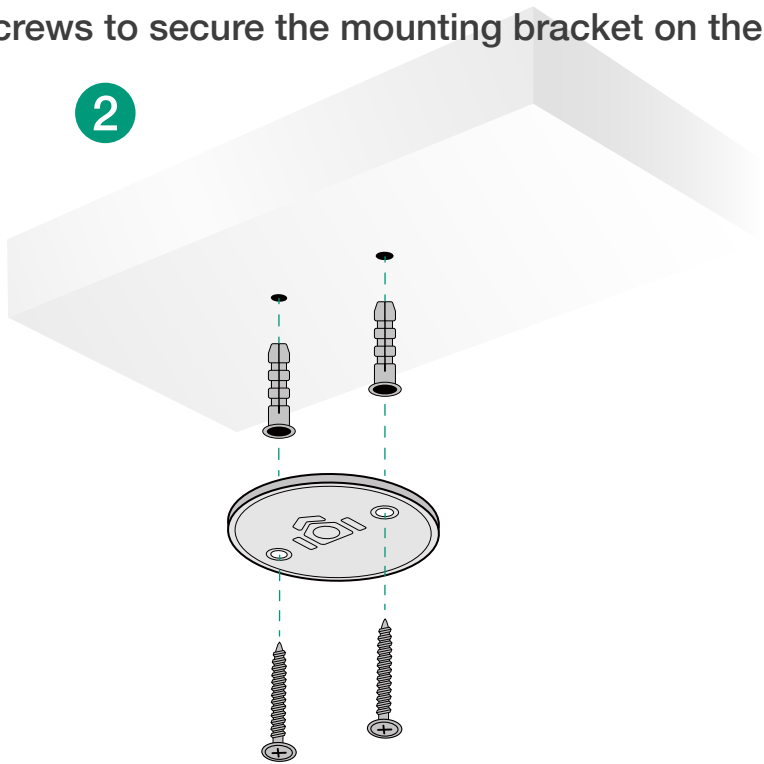


3

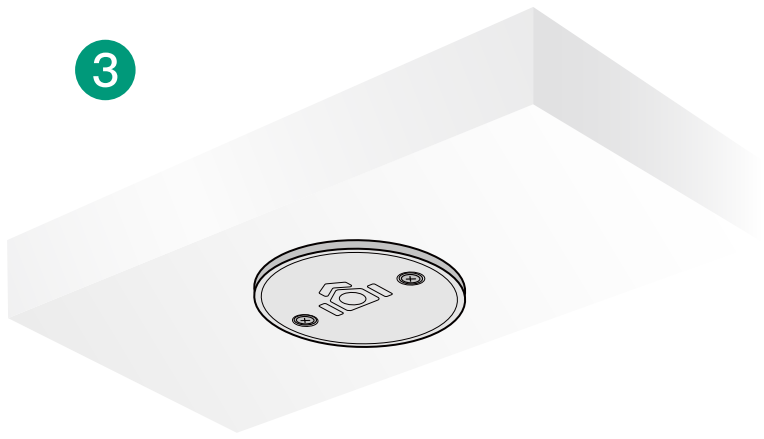


Ceiling Mounting

Firmly screw the knob of the mounting bracket into the mounting hole.

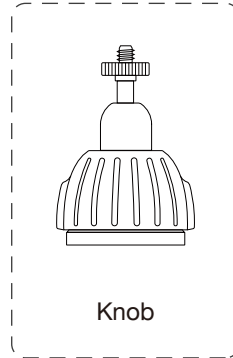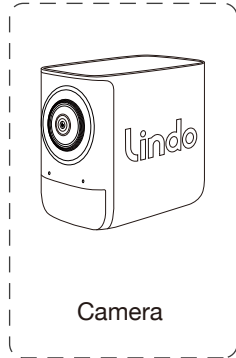


What you need: Ladder, Screw Hole Positioning Card.

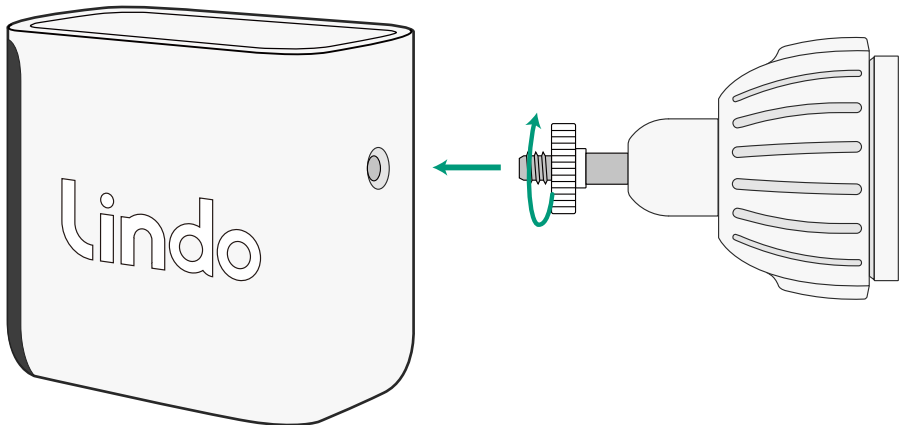

Ceiling Mounting


Hold and snap the camera to the mounting bracket.

1

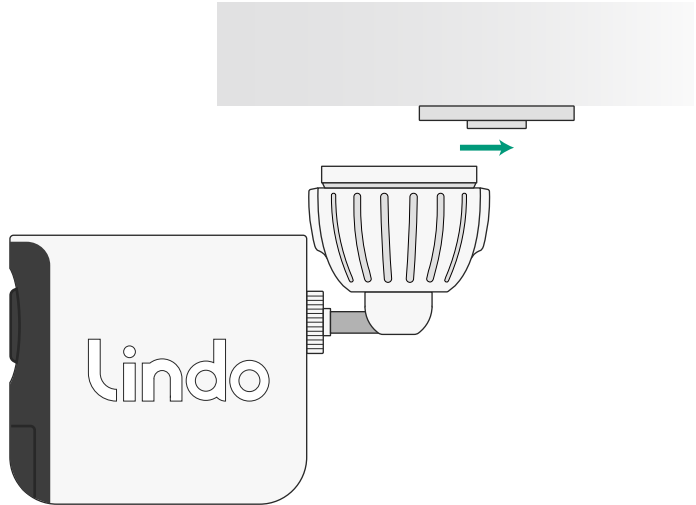


Unscrew the knob to adjust the mounting angle.

2

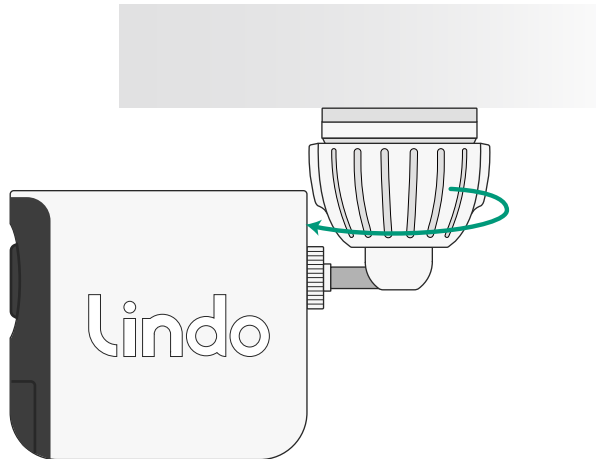



Then firmly screw the knob.

3

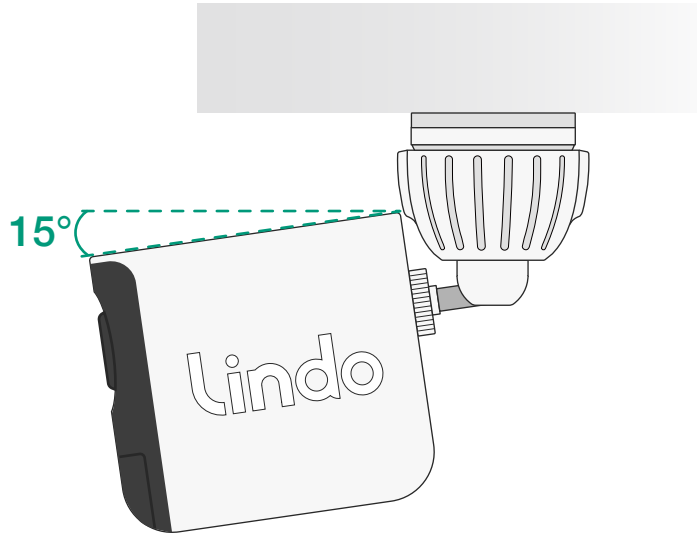

View and check the view of the live stream and signal strength in Lindo Life app.



4

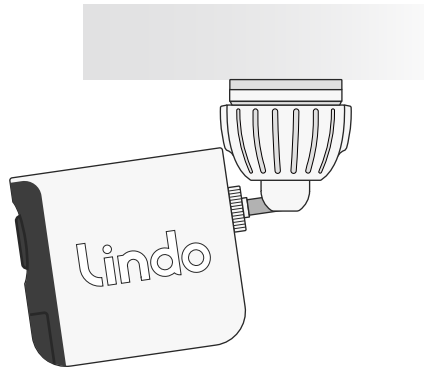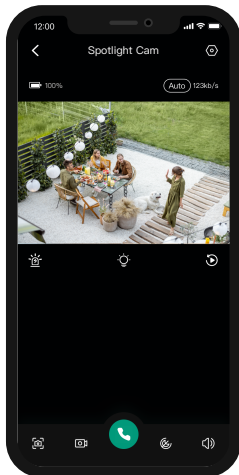







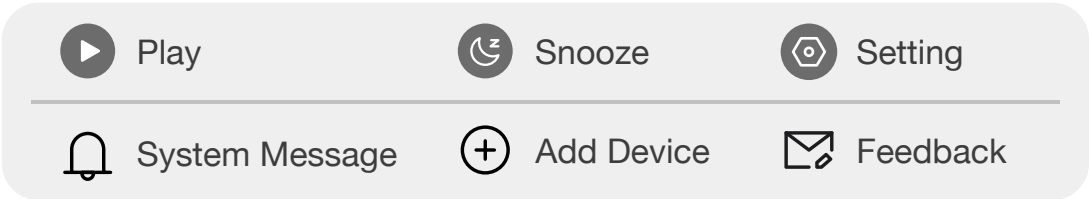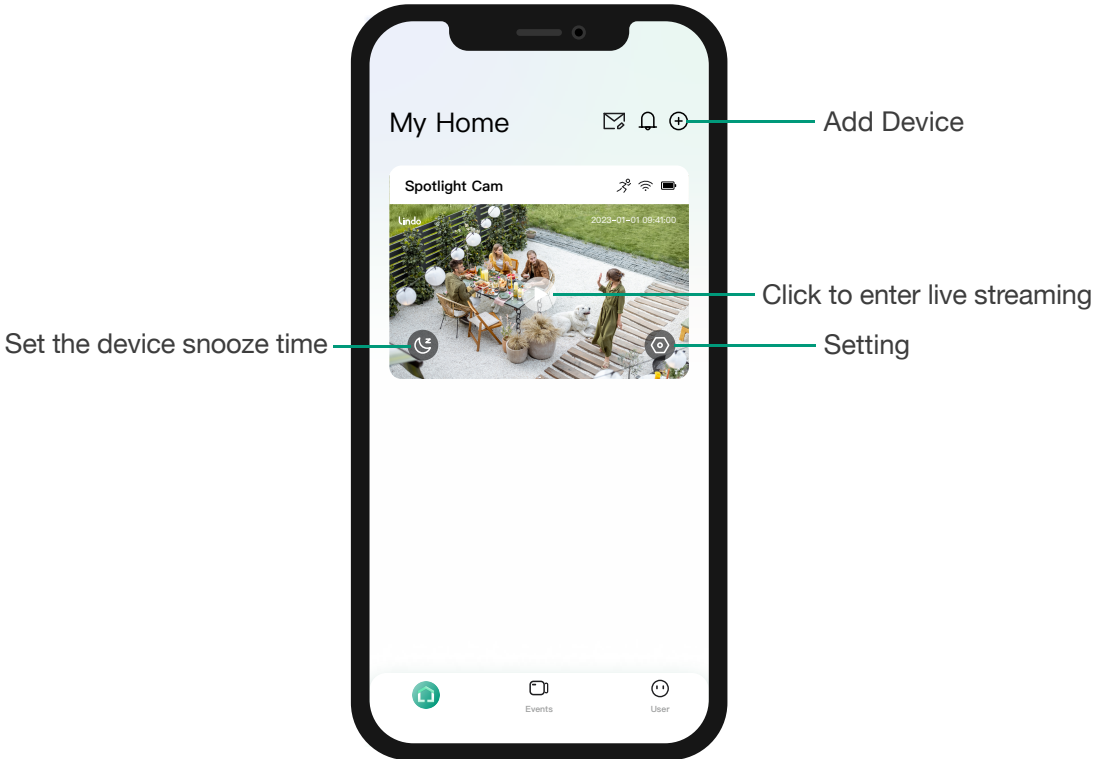






8. APP PAGE GUIDE

Home Page

When you open Lindo Life App, you will see your device(s) and preview image.





Battery Level and Signal Reminder

	>80%		Great
	60-80%		Good
	40-60%		Normal
	20-40%		Bad
	<20%		No signal
	USB Charging		PD Fast Charging
	Solar Panel		



Live View Page

1. You can zoom in and out with two fingers.
2. When you allow Lindo Life App to access photos, you can save snapshot.

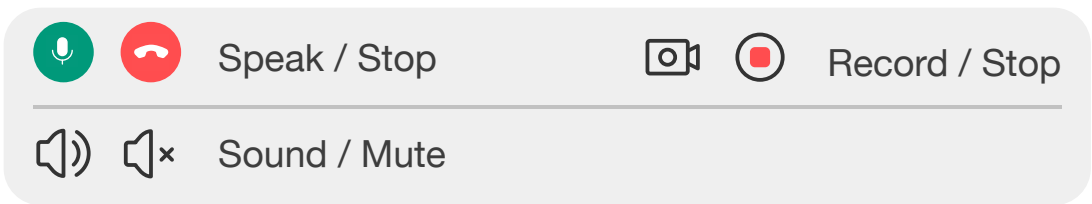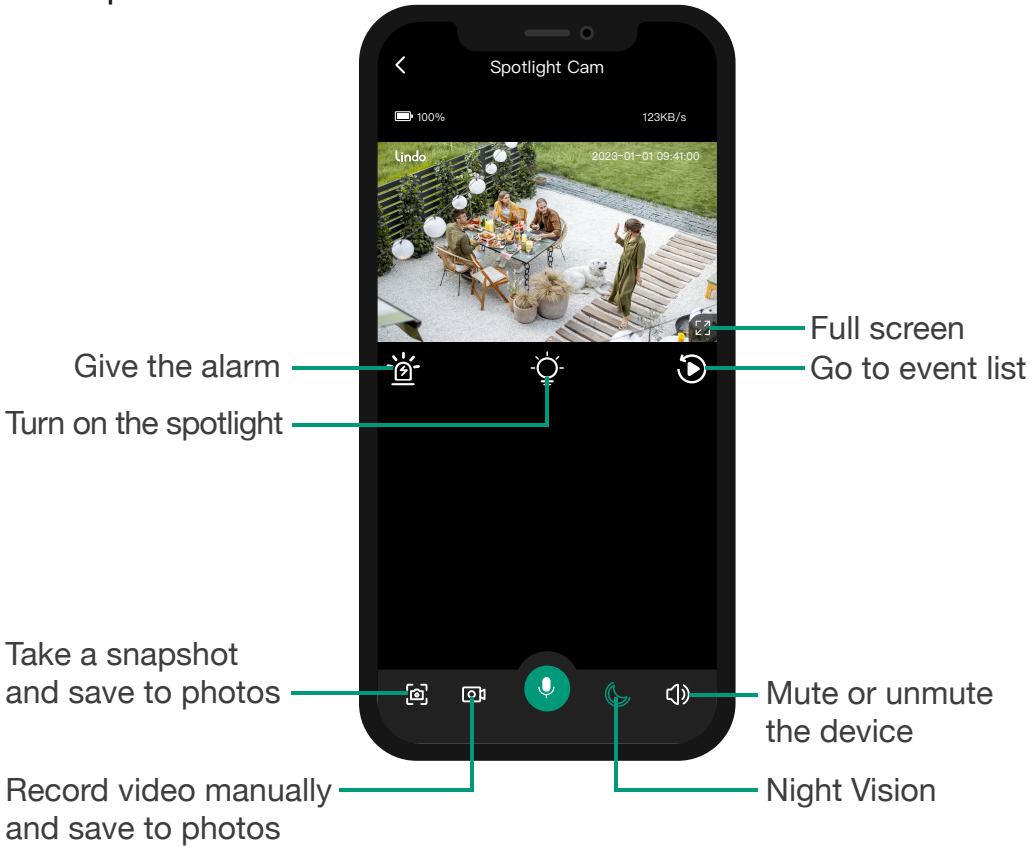

Live View Page

1. Press and hold the light button (bulb icon) to adjust the brightness of the spotlight.
2. Click the night vision button (moon icon) to choose between black and white mode or full-color mode.

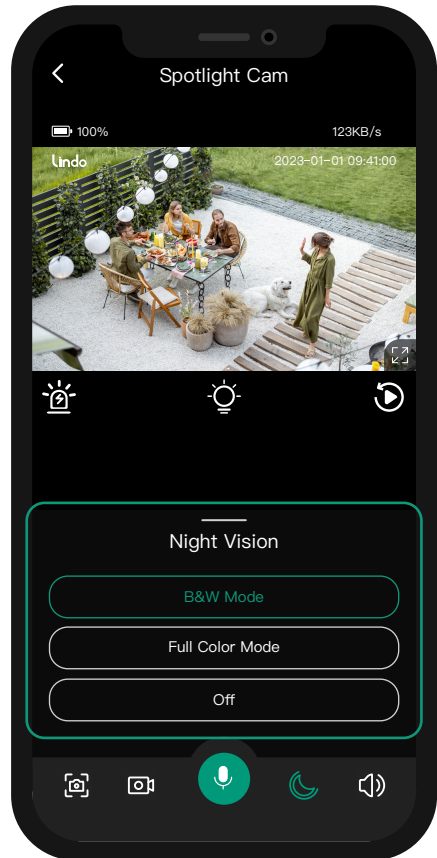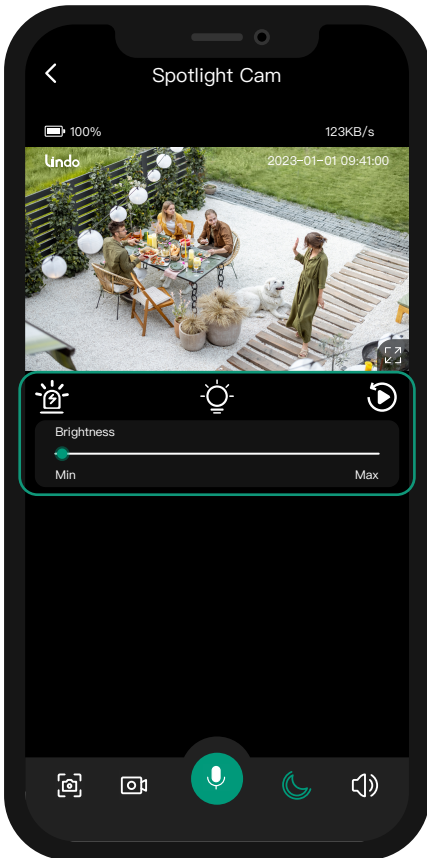

9. NOTICE

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Notice: Charging Statement

When charging your device, you must use a charger and charging cable that meets USB-IF certification and FCC certification.

Customer Service

Warranty

12-month limited warranty

Email Us

Customer Support: support@lindolife.com



@Lindo_life



@LindolifeOfficial



@Lindolife_Official



@Lindolife

Lindo

Lindo Innovation INC. All rights reserved. LINDO and LINDO LIFE Logo are trademarks of Lindo Innovation INC, registered in the United States, Japan, European Union and other countries.