

Welcome

Thank you for purchasing Xodo Smart home products!

We are committed to bringing you excellence with smart technology products that make life more comfortable, convenient, and provide a more dynamic healthy lifestyle.

Table of Contents

Welcome	1
Package Contents	2
Specifications	4
Introduction	5
Xodo Smart App	7
Configure the Light Bulb Settings	15
Installation of Smart WiFi Camera	16
Connect E4	17
Configure the Camera Settings	22
Connect WP1	23
Configure the Smart Plug Settings	28
My Home Page	29
Smart Features	30
Google Home	33
Alexa	35

What's included in the box

You will find the following contents included to help you get started:



Package Contents

E4 Smart Home Camera×1: Micros USB Wall Charger×1,
Micro USB Cable×1, Mounting Screw Sets×3

LB3 Smart Bulb×1

WP1 Smart Plug×2

Product Features

Your E4 Smart home camera has the following features:

- WIFI Connection required
- 1080P HD Camera
- Mobile Remote Viewing
- Infrared Night Vision
- Motion Detection
- Two Way Audio
- Micro SD Card
- Shared User Access with Xodo app

Your LB3 smart home light bulb has the following features:

- Scheduled on/off
- Timer Setting
- Customizable Moods or Color
- Remote Monitoring
- Amazon Alexa Compatible
- Google Home Compatible

Your WP1 smart home wall plug has the following features:

- Scheduled on/off
- Timer Setting
- Remote monitoring
- Amazon Alexa Compatible
- Google Home Compatible

General Notice

Always make sure to follow safety instructions.

- Do not use products if they have become damaged.
- Follow instructions and only operate products in a safe environment.
- Do not operate electronics in wet conditions. Doing so may cause property damage, bodily harm or electrocution.
- Do not disassemble or alter the product. Doing so will void the warranty.

Smart WiFi Camera E4

Power Input: 5V 1A(Min)

Total Power Consumption: 5W(Max)

Support System: Android or IOS

Resolution: 1920 x 1080

Video Compression: H.264 High Profile

WiFi: IEEE 802.11 b/g/n 2.4GHz

Audio: Two-way talk, noise cancellation

Memory Type: Micro SD Card

Storage Support: 128 GB

Monitoring: Motion detection, remote wake up

WiFi Bulb LB3

Working Voltage: 120V

Wattage: 9W

Lumen: 800lm

Color: RGB+2700K

WiFi Smart Plug WP1

Rated Voltage: 100V-240V AC 50Hz-60Hz

Rated Current: 10A

Max Power: 1100W

Output Port: 1 AC (US)

Working Temp: -10~50°C

Support System: Android or IOS

WiFi: 802.11 b/g/n 2.4GHz

WiFi Bulb Introduction



Smart Camera Introduction



Smart Camera Components

IR LED — Measures ambient light to brighten playback brightness.

Light Sensor — Determines when to turn on IR sensor.

MIC — Capture input audio.

Lens — Capture video image.


Reset Button — Setup and configuration button.

Micro USB Port — Power supply.

SD Card Port — - Memory storage of saved photo and video clips.

Smart Plug Introduction

1. Manual control button

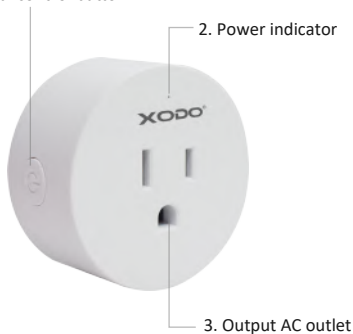

2. Power indicator

3. Output AC outlet



4. Input AC plug

WiFi Smart Plug Components

Button — Press to turn on/off the Plug

Output AC plug — Charging via charger

Input AC plug — Plug in a normal socket

Indicator Light

Blinking blue: Configuration status

Blue light ON: Smart plug is working

Blue light OFF: Smart plug stop working

Download and Install the Xodo Smart APP

Download and install the APP. It can be also be found by searching "Xodo Smart" by Contixo Inc. in the App Store (for IOS) or Google Play Store (for Android).



Xodo Smart

Connect LB3





The welcome screen will appear and then you will be asked to login or register a profile.

1. Register an account by entering your email address and setting up a profile or logging in with an existing account.
2. Configure your WiFi by choosing your network and provide password credentials. The APP supports 2.4 GHz WiFi networks (5 GHz network is not compatible).
3. Additional members can be added later in the Family Settings to allow others to control smart products.

Adding Devices


When detecting devices manually, power on the device and confirm the indicator light is blinking rapidly. (Hold the reset button for 5 seconds) Once you confirm the smart device is ready, press the “Confirm indicator rapidly blink” button. Continue on to the next step. Pressing the “Help” button will offer some troubleshooting guidelines to follow.

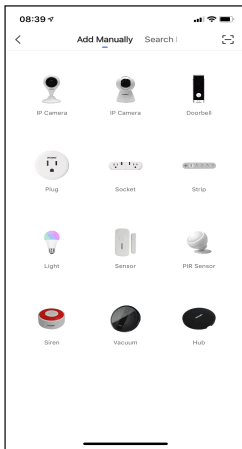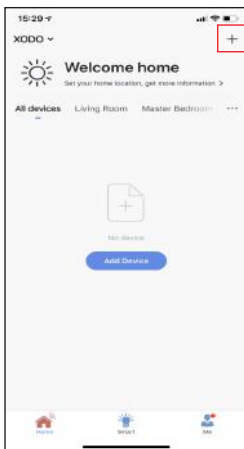

Detecting Device

When detecting devices manually, power on the device and confirm the indicator light is blinking rapidly.

- Once you confirm the smart device is ready, press the “Confirm indicator rapidly blink” button. Continue on to the next step.
- Pressing the help button will offer some troubleshooting guidelines to follow
- If the light bulb is not flashing, try turning the light bulb on and off three times then leave on.

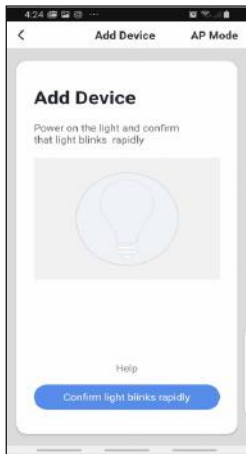

Connect to a WiFi network



The next step to connect the smart device is to connect to a WiFi network.

Now you want to connect the smart device to a local WiFi network. If the proper network is not listed on this page, select the "Change Network" link to see a list of available networks.

Your router may broadcast both 2.4Ghz and 5.0Ghz broadband frequency. Make sure to select the 2.4Ghz Wifi.


Enter your Internet Password and connect to the network.

Connecting



The Connecting screen will appear, it will usually register within by approximately 30% range. The Device found will checkmark green, then Initializing device will complete. After connecting process completes it will continue on toward the next screen.


Confirmation Screen

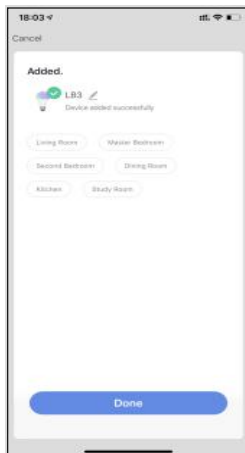

The smart device is added once they are communicating on the same network.


- You can rename the smart device by clicking on the pencil icon.
- You can specify the location.
- Press the Completed button at the bottom of screen to continue to next step.

Home Screen Updated

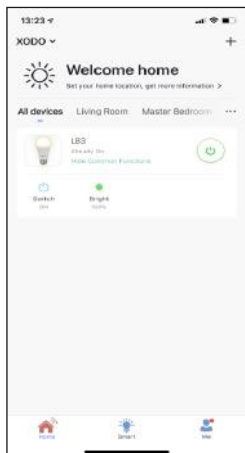

Now that your device has been added, it will show on the home screen along with all other paired Xodo Smart Products. Now you are all set.

White Mode

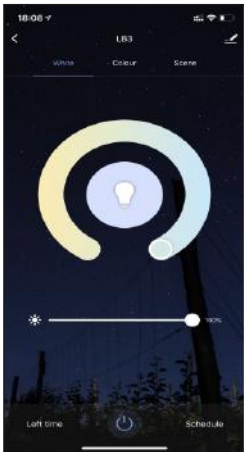

The White Mode screen will allow basic controls over the standard lighting mode.

- Bright controls the brightness
- Color Temp allows the light to take different moods

Color Mode



Color Mode allows additional controls over the lighting

- Saturation will give more brilliance to the lighting
- Bright will allow control over light intensity

Scene Mode



Scene Mode allows additional controls for preset lighting

- Each light mode will provide different lighting effects to choose from.

Schedule




This will keep the bulb in ON/OFF position for a specific duration of time.

1. Click on "Schedule".
2. Click "Add".
3. First configure the hours (left)
4. Next configure minutes (right)
5. Click "Repeat" and choose the day of the week.
6. Select the state of the switch(ON/OFF).
7. Click "Save" to save the settings.


Left Time

This will keep the bulb in ON/OFF position for a specific duration of time.


1. Click "Left time".
2. Select the switch that needs to be set.
3. First configure the hours (left).
4. Next configure minutes (right).
5. Click "OK" to save the settings.

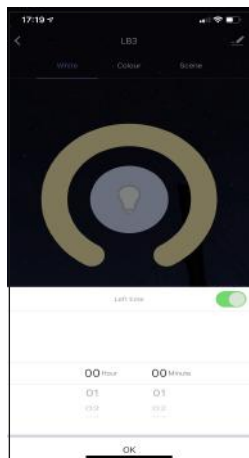

Configure the Light Bulb Settings

Different features can be adjusted from the menu button on the upper right hand button “” on the APP.

1. Device Name can be changed as desired.
2. Device information can check the information of the wifi bulb.
3. Tap-to-Run and Automation allows to check the Smart Automation your device linked with.
4. Supported Third-Party Control provides the information about how to connect your device to Amazon Alexa, Google Assistant.
5. Offline Notification allows to alert you when your device is offline.
6. Add Members to be able to control the device in the Share Device setting.
7. Create Group to control other smart device at the same time.
8. FAQ & Feedback allows users to report issues and get help.
9. Add to Home Screen allows you to add the wifi bulb to the home screen of your smartphone.
10. Check Device Network allows you to check the network connection status.
11. Firmware Information allows to check software or install updates to device.
12. Remove device will remove the wifi bulb from the Xodo Smart app and remove pairing. This is necessary if pairing with a new device.
13. Restore Factory Defaults allows to reset the wifi bulb to factory setting.

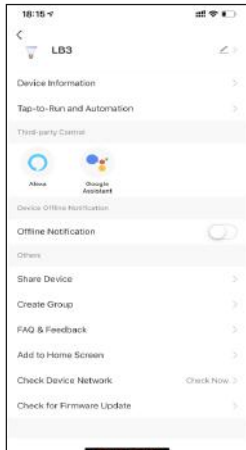

Installation of Smart WiFi Camera

1. Rotate the base counterclockwise and remove camera from mounting base.



2. After removing mounting base, Install the base where you want to install the camera.



3. Install the base securely by using provided mounting screws.



4. The camera will mount back onto the mounting base with a clockwise motion.




5. Connect USB power supply and external memory card.

6. Download Xodo app, create or login to account, and follow app instructions.



Connect E4

The welcome screen will appear and then you will be asked to login or register a profile. Register an account by entering your email address and setting up a profile or logging in with an existing account.

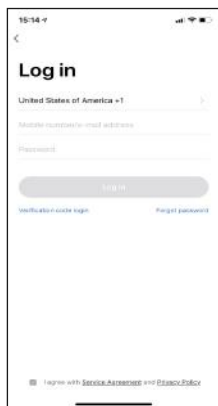

Adding Devices

You will be able to manually add a device. Select IP Camera to continue.

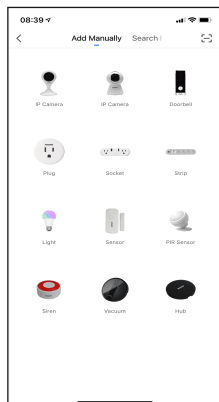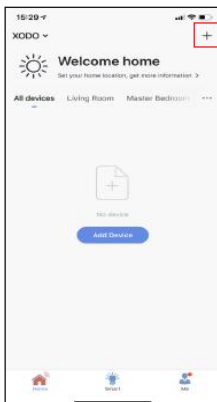

Detecting Device

When detecting devices manually, power on the device and confirm you hear the “Didi” sound. (Hold the reset button for 5 seconds)

Once you confirm the smart device is ready, press the “Next Step” button. Continue on to the next step. Pressing the “Resetting Devices” button will offer some troubleshooting guidelines to follow.



Connect to a WiFi Network

Next step to connect the smart device is to connect to a WiFi network. If the proper network is not listed on this page, select the “Change Network” link to see a list of available networks. Enter the password next to the lock icon. Press “Confirm” to continue .



Scan with Camera Screens

The pairing process will ask for your to use the camera to scan a QR barcode on the screen.

Press “Continue” to begin.

The QR barcode will appear on the screen.

Hold camera in front of the QR barcode until you hear a prompt.


Press the “I Heard a Prompt” button to continue.

Pressing the “No Prompts” will provide some trouble shooting steps to help get camera to scan the QR barcode.




Connecting

After you hear the beep and continue on, the “Connecting” screen will appear. It will usually register within by approximately 30% range. The Device found will checkmark green, then Initializing device will complete. After connecting process completes it will continue on toward the next screen.

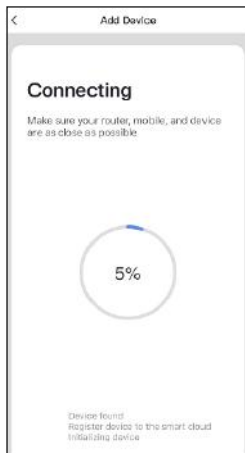


Confirmation Screen

The smart device is added once they are communicating on the same network. You can rename the smart device by clicking on the pencil icon. You can specify the location. Press the “Done” button at the bottom of screen to continue to next step.

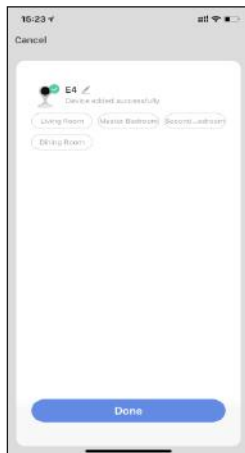

Home Screen Updated


Now that your device has been added, it will show on the home screen along with all other paired Xodo Smart Products. Now you are all set.

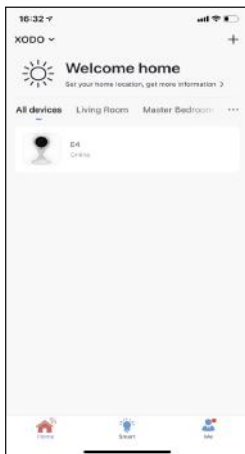


Camera Home Screen

The home screen will show the live camera feed along with camera controls.


1. Press the “Screenshot” button to take a snapshot.
2. Press the “Speak” button to communicate with people next to the smart camera.
3. Press the “Record” button to record video.
4. “Playback” will access stored video from the memory card.
5. Press the “Alarm” button to switch on/off the Motion detection alarm function.
6. “Cloud storage” allows to view your record in cloud storage.
7. Press HD/SD button to switch image quality.

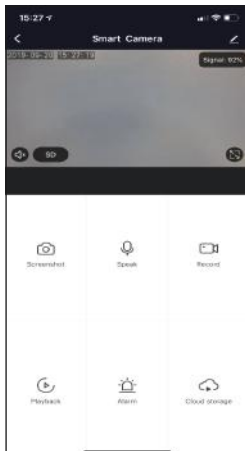

Configure The Camera Settings

Different features can be adjusted from the menu button on the upper right hand button “” on the APP.

1. Device Name can be changed as desired.
2. Device information can check the information of the Camera.
3. Tap-to-Run and Automation allows to check the Smart Automation your device linked with.
4. Basic function settings can set below functions: Flip Screen: on/off; Talk Mode: One-Way Talk/ Two-Way Talk.
5. Detection Alarm Settings allows to switch the Motion Detection on/off . Having the motion sensor on will alert the smart device each time there is movement.
6. Purchase VAS allows to purchase cloud storage.
7. Add Members to be able to control the device in the Share Device setting.
8. FAQ & Feedback allows users to report issues and get help.
9. Add to Home Screen allows to add the Camera to the home screen of your smartphone.
10. Firmware Information allows to check software or install updates to device.
11. Remove device will remove the Smart Camera the Xodo Smart app and remove pairing. This is necessary if pairing with a new device.

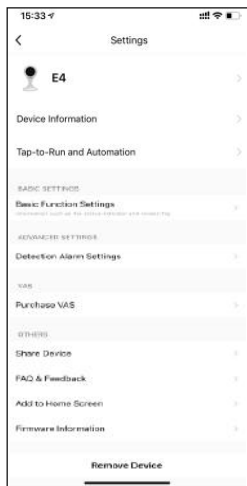



Connect WP1

The welcome screen will appear and then you will be asked to login or register a profile. Register an account by entering your email address and setting up a profile or logging in with an existing account.



Adding Devices

You will be able to manually add a device. Select Plug to continue.

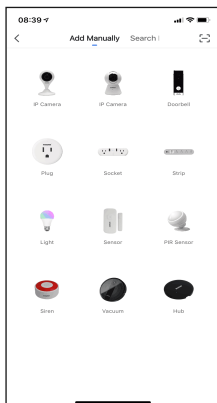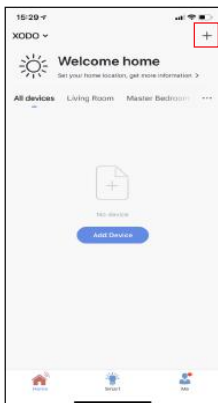

Connect to a WiFi network

The next step to connect the smart device is to connect to a WiFi network. If the proper network is not listed on this page, select the “Change Network” link to see a list of available networks. Enter the password next to the lock icon. Press “Confirm” to continue.




Connecting

The “Connecting” screen will appear. It will usually register within by approximately 30% range. The Device found will checkmark green, then Initializing device will complete. After connecting process completes it will continue on toward the next screen.




Confirmation Screen

The smart device is added once they are communicating on the same network. You can rename the smart device by clicking on the pencil icon. You can specify the location. Press the Done button at the bottom of screen to continue to next step.

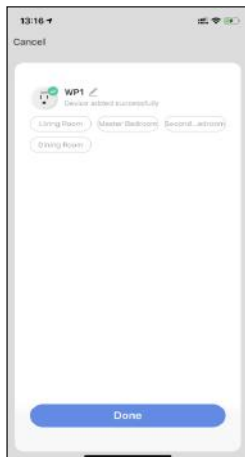

Home Screen Updated


Now that your device has been added, it will show on the home screen along with all other paired Xodo Smart Products. Now you are all set.

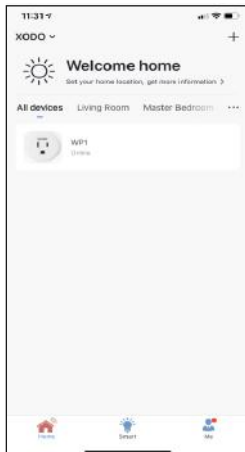

Smart Plug Home Screen

The home screen will show the live plug status.


1. Press the “OFF”/”ON” button to turn off/on the smart plug.
2. Press the “Countdown” button to set countdown on or off.
3. Press the “Schedule” button to set a schedule.

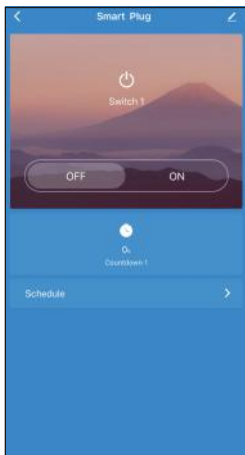

Countdown function

This will keep the sock in ON/OFF position for a specific duration of time.

1. Click "Countdown".
2. Select countdown time
3. Click "OK" to save the settings.

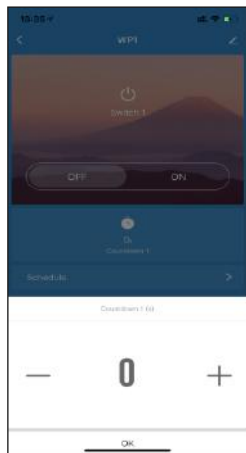


Timer function

This will keep the sock in ON/OFF position for a specific duration of time.


1. Click on "Schedule".
2. Click "Add".
3. First configure the hours (left)
4. Next configure minutes (right)
5. Click "Repeat" and choose the day of the week.
6. Select the state of the switch(ON/OFF).
7. Click "Save" to save the settings.




Configure the Smart Plug Settings

Different features can be adjusted from the menu button on the upper right hand button “” on the APP.


1. Device Name can be changed as desired.
2. Device information can check the information of the wifi plug.
3. Tap-to-Run and Automation allows to check the Smart Automation your device linked with.
4. Upported Third-Party Control provide the information about how to connect your device to Amazon Alexa, Google Assistant, Tmall Genie and DuerOS.
5. Offline Notification allows to alert you when your device is offline.
6. Add Members to be able to control the device in the Share Device setting.
7. Create Group to control other smart device at the same time.
8. FAQ & Feedback allows users to report issues and get help.
9. Add to Home Screen allows to add the wifi plug to the home screen of your smartphone.
10. Check Device Network allows to check the network connection status.
11. Firmware Information allows to check software or install updates to device.
12. Remove device will remove the wifi plug from the Xodo Smart app and remove pairing. This is necessary if pairing with a new device.
13. Restore Factory Defaults allows to reset the wifi plug to factory setting.

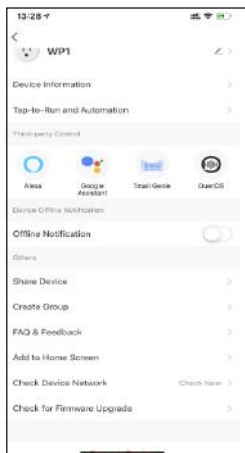

My Home Page

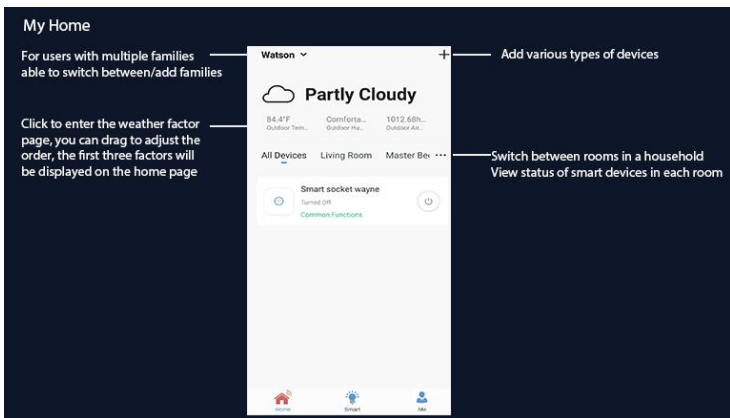


Device Controls

1. Some devices can set group control. Click " in the upper right corner
2. Click "Create Group".
3. The page displays all devices with the same model number and available to be added as a group. Select the device and click "Confirm".



4. Enter group name and click "Save" to finish.

5. When a group has been created successfully, the page will be automatically redirected to the group control panel, where grouped devices can be managed.


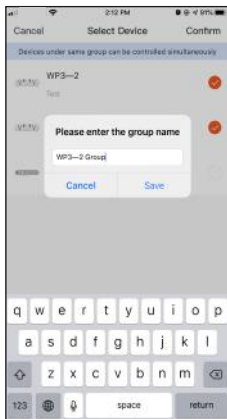


Smart Features

1 Click "Automation" on the "Smart" page.

2 Click "+" to go to the smart configuration page.



3 Select trigger condition.

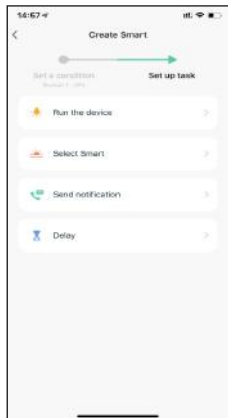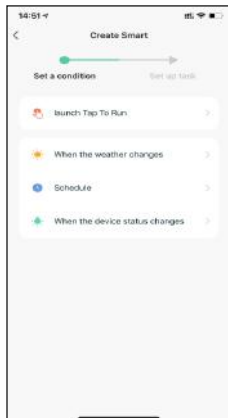

4 Select the action to occur.

5 Click “Name” and enter the automation name.

6 Click “Effective Period” to set a valid time period for automation.

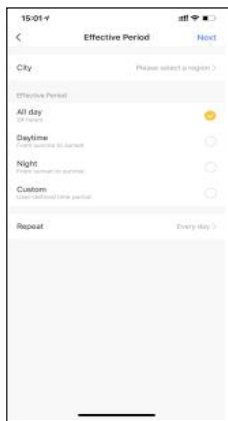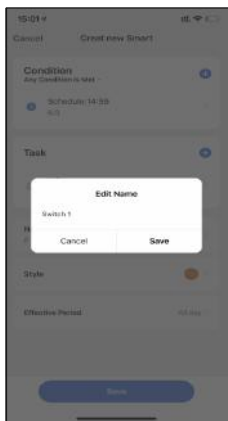


7 Click “Save” and then click “Yes” to create the automation.

8. Click the switch in the lower right corner to select to execute or turn off the automation.






Smart Features - Tap-to-Run

- 1 Click "Tap-to-Run" on the "Smart" page.
- 2 Click "+" to go to the smart settings page.
- 3 Click "launch Tap To Run" to add set automation.



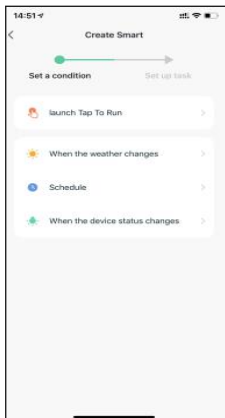


- 4 Click the task to occur.
- 5 Click "Name" and enter the Tap-to-Run's name and click "Save" to finish.

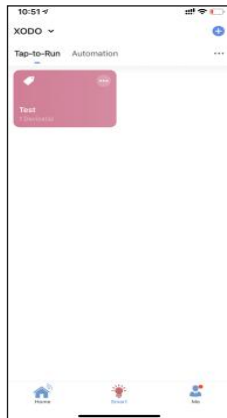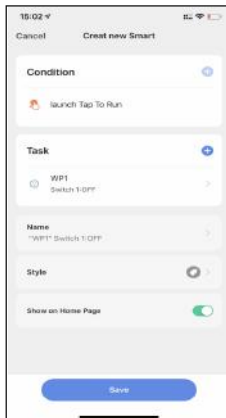
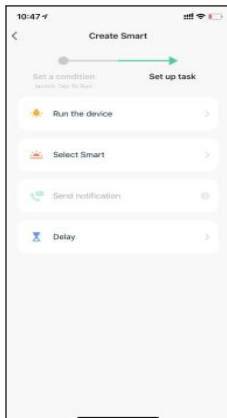


Link Xodo Smart account to Google Home Screen


1. Open Google Play Store or Apple Store and download Google Home
2. Open the Google Home app. Click on Get Started.
3. Login with a Google Account or create a new account.

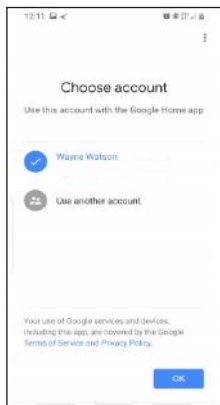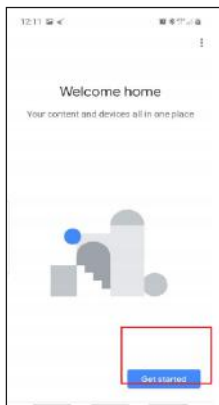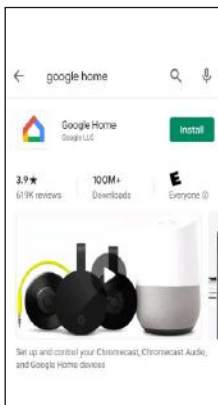



4. Use Location access to find devices on the same wifi network.
5. You will need to permission so Google Home can access device.
6. The app will search for devices to connect.

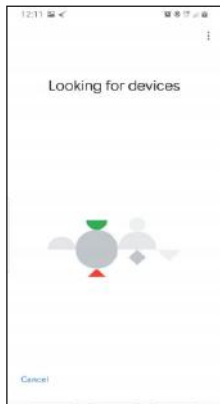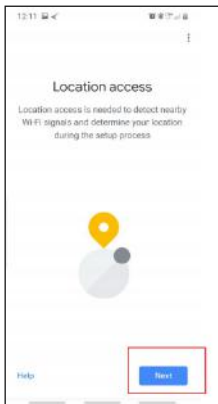

- If no devices can be found that are already setup, select NO.
- A youtube video is available to help instruct how to use smart devices.
- The app will show settings to add devices, setup routines, and adjust settings.

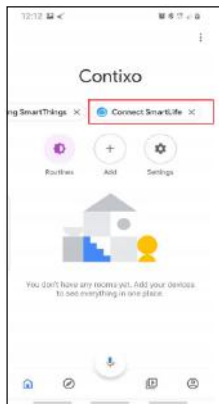

- If the devices are already installed and setup through the Xodo app, you can select the "Works with Google" setup option to continue.
- Configure the home settings by adding address and name to a "Home" group.

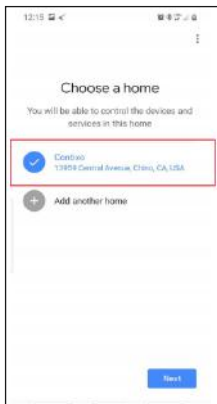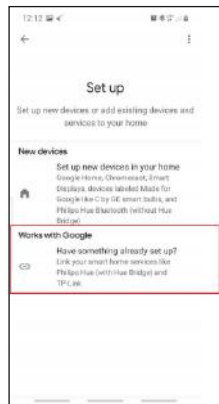




Control your smart devices through Google Home

Now you can control your smart devices through Google Home. Take bedroom light as the example, the supported voice commands are as below:




1. Ok Google, turn on/off bedroom light.
2. Ok Google, set bedroom light to 50 percent.
3. Ok Google, brighten bedroom light.
4. Ok Google, dim bedroom light.
5. Ok Google, set bedroom light to red.

Link Xodo Smart account to Alexa

1. Download the free Alexa app from the Amazon Appstore, Google Play, or the Apple App Store.
2. Open Alexa app to home screen
3. In upper left hand corner open the menu.
4. Next click on "Skills & Games"
5. In top of app you can now search for "Smart Life"
6. Smart Life App will appear.

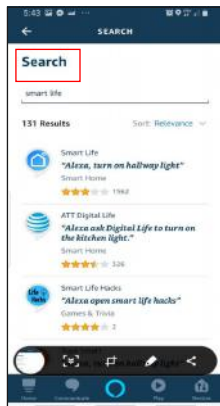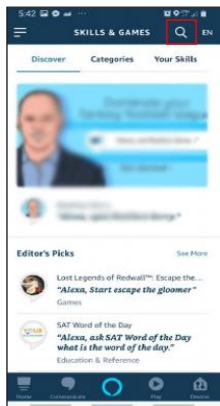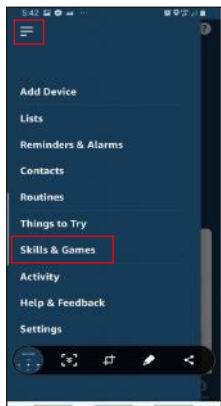

- Open the smart life app to add
- Click Settings
- Manage Smart Home Devices to verify Smart Life has been added.

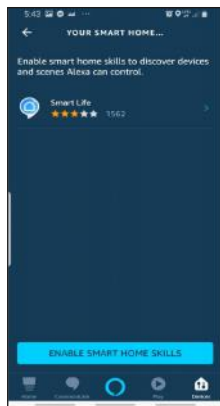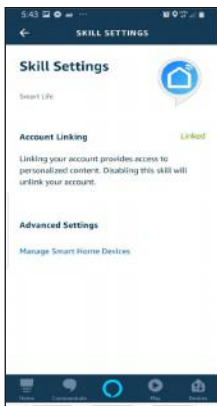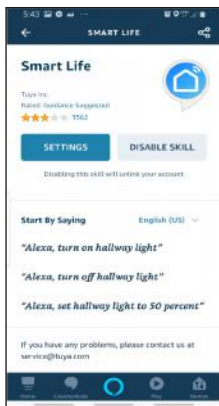

- You will be redirected to the account link page. Type in your Xodo Smart account and password, don't forget to select the country/region where your account belongs to. Then tap "Link Now" to link your Xodo Smart account. The country/region, the account, and the password must match.

