

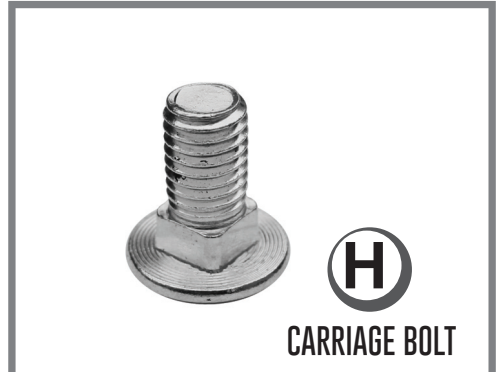
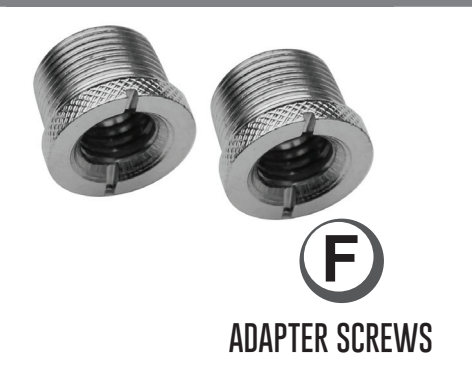


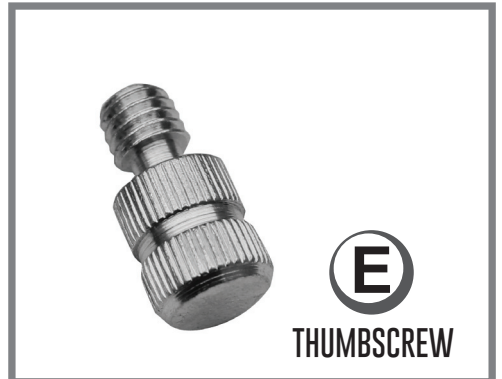

DESKTOP MICROPHONE ISOLATION SHIELD

PACKAGE INCLUDES

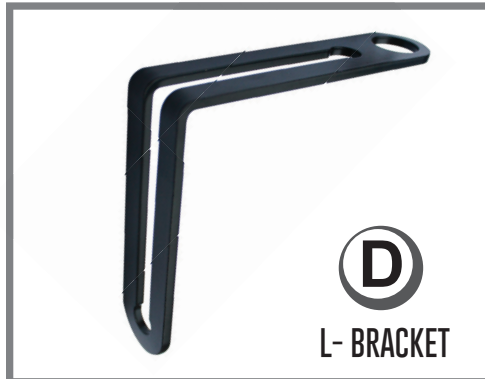

ASSEMBLY INSTRUCTIONS

Perform the following steps to assemble this desktop microphone isolation shield:

1. Invert the **Base (C)**, then insert the **Carriage Bolt (H)** into the bottom so that the square portion of the shank seats into the square hole in the bottom of the **Base**.

2. While holding the **Carriage Bolt** in place, turn the **Base** over and hold it in one hand, then screw the **Microphone Stand (B)** onto the **Carriage Bolt**.

3. Screw one of the **Adapter Screw (F)** into the base of the **Microphone Isolation Shield (A)**.

4. Insert the **Thumbscrew (E)** into the 3/8" hole in the long portion of the **L-Bracket (D)**, then slide it along the groove to the back. The threads of the **Thumbscrew** will protrude through the **L-Bracket** opposite the short portion of the bracket, as shown in the assembly diagram.

5. Screw the remaining **Adapter Screw (F)** on the protruding threads of the **Thumbscrew** on the **L-Bracket**.

6. Screw the **Washer (G)** onto the **Microphone Stand** then insert the **Microphone Stand** through the 5/8" hole of the **L-Bracket**. While holding on to the **L-Bracket** assembly, steadily screw on the **Microphone Isolation Shield** into the **Microphone Stand**.

7. Install your 5/8" **Microphone Clip** or 5/8" **Shock Mount** (not included) into the 5/8" hole of the **Adapter Screw**, securing the **L-Bracket** onto the **Microphone Stand**. Alternatively, if you are using a 3/8" **Microphone Clip**, install a 5/8" to 3/8" **Adapter** (not included) instead to secure the **L-Bracket** in place. Then install your 3/8" **Microphone Clip** or **Shock Mount** onto the adapter.

