

Temporary Area LED Lighting

08-00418

13,000 Lumen (100W)



FEATURES

- 130 Lumen per Watt
- 6 Adjustable Light Panels (0-45-90) Degree
- 5-15 Receptacle to Connect Additional Lights
- Powerful SMD LED
- 6,000 Volt Surge Protection
- LED Life Span of 50,000 hours
- Heavy Duty Metal Spring Hook
- Suitable for Covered Damp Locations

SPECIFICATIONS

- 13,000 Lumen/100 Watt
- 130 Lumen per Watt
- SMD LED
- 5-15 Female Receptacle to connect additional lights
- 5-15 Plug
- 5000 Kelvin Color Temperature
- LED Driver Capable of 120/208/240/277 Volt, 50-60Hz
- 10 foot, 14/3 SJTW Power Cord
- Black
- cETLus Listed

PACK QUANTITY/UPC


- Pack Quantity = 2
- UPC# 8-03058-00418-7





LED Temporary Work Lamp

08-00418

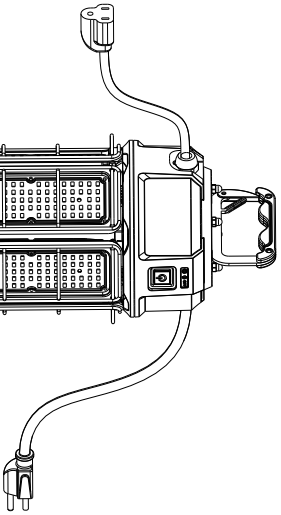

BASIC INFO

Model	Power	Voltage	Lumen	Suitable for
08-00418	100W	AC 120V	13,000lm	Damp Location

1. The driver of this work light can be worked at 120-277V. But the usage only under AC 120V meet the UL/ETL product certification standard.
2. Any modified conversion to these luminaires will immediately void the warranty

Application:
Suitable for construction sites or any other location requiring a temporary work lamp.


CAUTION!!

- Make sure the distances between live part and metal part of the device can satisfy reinforce or double insulation.
- Before installation and maintenance of the device, please disconnect the power to prevent electric shock.
- The LED temporary work light must be installed in an appropriate environment, operating in harsh environments may shorten the lifespan or even damage the device.
- Please keep the device away from any corrosive substance, clean with dry cloth only.
- To ensure personal safety, please make sure the device is staying firmly and securely when install on high places.


INSTALLATION INSTRUCTIONS

Warning: Please check and make sure there is no sign of physical damage to the product when unpacking. Do not use damaged product.


- Step 1**
Tighten the carabiner O hook and fix the hook screw.




- Step 2**
Ensure the installation spot is strong enough to bear a minimum of 66lbs of weight.



- Step 3**
Plug the power cord to a power outlet. Turn on the device and see if the device is operating accordingly.



- Step 4**
Pull down each panel by hand to 45 degree, pull down again to 90 degree to get different lighting angle.




LINKABLE

Products use 14/3 cable
100W - For only use with this product connect up to 9pcs


<http://www.voltec-industries.com/>



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

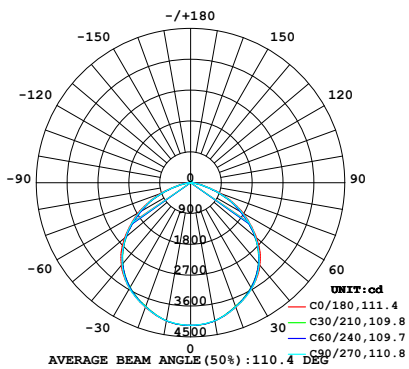

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

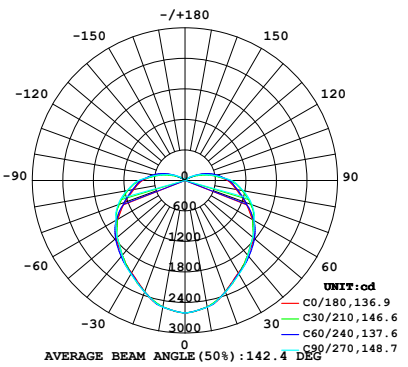

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

