




We design the grind way of life.

GRINDTECH

— Premium Quality —

Instruction manual

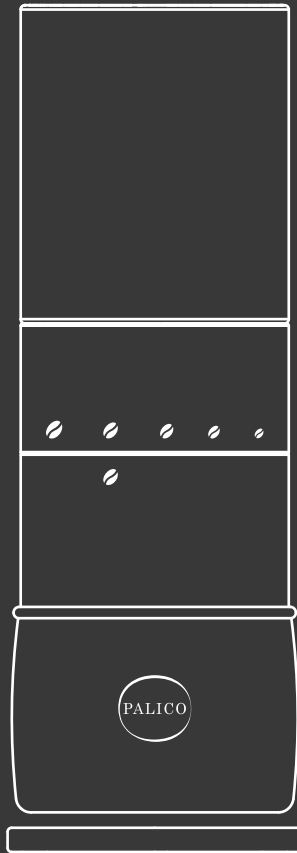

Product Overview:



A Type-C USB cable	G Lower housing
B Charging base	H Silicone cover
C Control panel	I Coffee bean / ground container
D Upper housing	J Travel bag
E Hopper	K Cleaning brush
F Grind size setting	

Tips:

Please charge the Grindtech before first use

- Please use a USB type-c data cable with a power adapter, to connect the wireless charging base. Once connected, the wireless charging base will be ready to use.
- Place Grindtech in the center of the wireless Charging Base, to start charging automatically.
- If you want to check the battery of Grindtech while charging. Please make sure the Bluetooth is connected. Once the Bluetooth is connected, open the App. It will display the Grindtech's status as " Charging" and the battery capacity of Grindtech.
- If the Grindtech is still in low battery, or not working, please check if you have placed the Grindtech onto the right position of the wireless charging base. Please also check if the USB type-c data cable has already been plugged in.

Daily cleaning

- Keep your grinder dry. Grinders cannot be washed by water. You may use the cleaning brush to slightly brush coffee grounds that left in hopper and bean container after used.

Tips:


Maintenance

Coffee beans contain oil. It will coat the hopper, burrs and grinding chamber over time. If you have used the grinder for more than 6 months, deep clean is necessary to remove out all the oil, dirt and coffee pieces. You may use 3-5g rice for cleaning. Cleaning procedure is as below:

- Put the rice into hopper.
- Twist lower housing to choose grind size. Suggested grind size is 4-5 as the motor will be over-heated if the grind size is too fine.
- Before doing normal grinding job, please grind 3-5g coffee beans to make sure that no rice is remained in the hopper, burrs and grinding chamber.

Reminder : The hopper is built inside the grinder. Please do not try to twist out the hopper.


Product Instructions:

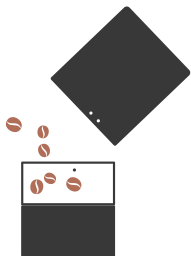

Add coffee beans

- Open the upper housing. Pour coffee beans into the bean hopper.

Note: Coffee bean hopper capacity: 20 - 25g



Selecting your grind size


- Select grind size by rotating the lower housing.

Note: There are 20 grind size setting for different coffee styles – Espresso, Coffeology Press, Pour-over, French Press and Steep.

Reference table


Grind Size	1.0		1.2		1.4		1.6		1.8		2.0		2.2		2.4		2.6		2.8		3.0		3.2		3.4		3.6		3.8		4.0		4.2		4.4		4.6		4.8		5.0	
	Brewing Method	Espresso		Moka Pot		Coffeology Press		AeroPress		Pour-over		Steep		French Press																												

Product Instructions:

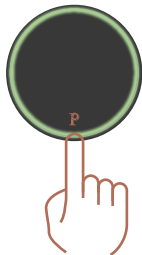

Wake up Grindtech

- Press the “**P**” logo once to turn Grindtech on.
- The top will show breathing **GREEN** light while it is in ready mode.

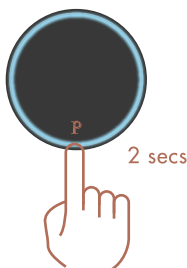

Manual control

- Press and hold the “**P**” logo for 2 seconds to start the grinding process. A breathing **BLUE** light will appear on top of Grindtech.
- Once the desired quantity of beans has been ground, switch off Grindtech by pressing “**P**” logo twice.

Reminder: You can stop the grinding process at any time by pressing the “**P**” logo.



App control

- Open PALICO app to connect with your Grindtech.
- Press Grind once to start the grinding job.
- Press Grind again to stop the grinding job.

Reminder: You can stop the grinding process at any time by pressing the Grind on App.

Product Instructions:



Finish grinding

- Pour the coffee grounds into any brewing tools.
- Enjoy your brewing journey!

Auto-off

- Don't worry if you may forget to switch off Grindtech. It has been designed with automatically turn off after grinding for 2 minutes.

Troubleshooting:

Green light isn't on after press "P" icon

- You cannot turn on the grinder without enough power. Please charge the grinder for 2 hours and then retry.

Clogging

- **RED** light will be on when clogging. The grinder may not be able to grind coffee bean without enough power. Please charge the grinder for 2 hours and then retry.
- If the grinder is fully charged, the grind size may be too fine to grind the coffee beans. Please choose a coarser grind size.

Cannot open hopper

- The finishing of the main housing is smooth. If you may find there is a difficulty to twist out, you may try to use a towel to cover the Grindtech with better gripping.

Troubleshooting:

Hard to Twist Lower Housing for Fine Grounds

- There is a chance very tiny coffee grounds stay inside of the burrs. At that time, you may find it is not so easy to change grind size from medium to fine setting. We suggest you to turn on the grinder and twist the other from coarse grounds, let it grinds for a while then you can reset yours desirable grind size.

Specification:

Brand:	Palico
Color:	Black
Material:	Aluminum, Stainless Steel, Polycarbonate, SAN, ABS
Item Weight:	1.24 lb / 0.56kg
Item Dimension:	64 x 64 x 145 mm
Coffee Ground Container with Lid Dimension:	75 x 75 x 53 mm
Wireless Charging Base Dimension:	77 x 77 x 8 mm
Hopper Weight:	20 - 25 grams
Coffee Ground Container Weight:	20 - 25 grams
Country of Origin:	China
Item model number:	FCG2102