




LECCY & GENESIS


# Video DoorBell V2

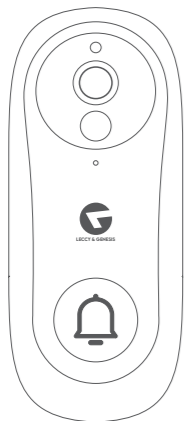

User Manual

www.urjasmart.com

## I. Product Appearance

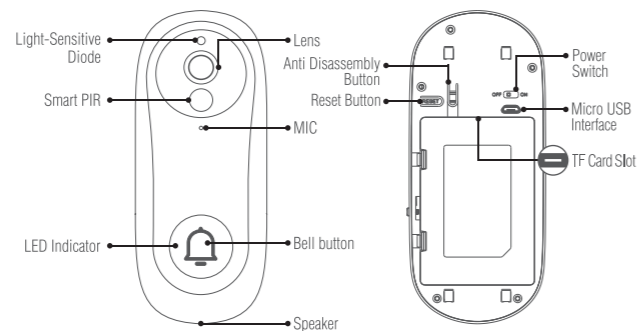

## II. Inside the Box




The images here are for reference only.

- 1 -


## III. Download the APP

Scan the Code and Download "Tuya Camera" App from the following QR Code

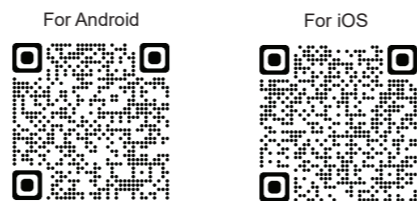

## IV. Register and Login

Open Tuya Camera App (you can scan the QR code on the box to get the app) and press "Sign Up" to register a new account. If you have an account, you can log in with your account & password.

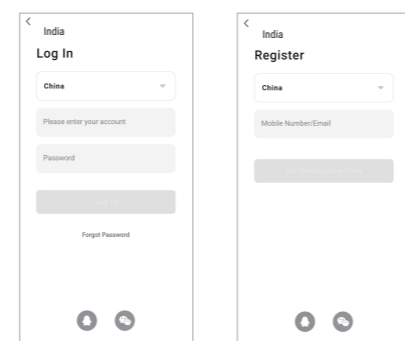


- 2 -

## V. Operation Guide

**1. Add device**  
Special reminder: Keep the doorbell, Chime and router as close as possible (to avoid network failure caused by too far distance).


① After clicking "+" or "Add Device" on the homepage, select "Add Manually - Camera & Lock - Smart Doorbell"

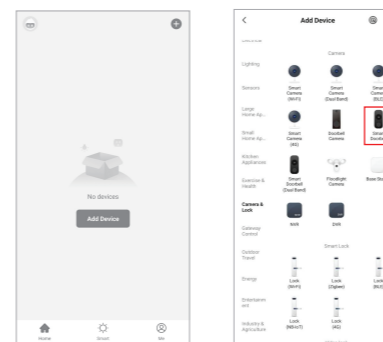


② Toggle the doorbell power button to the ON position, then the doorbell is on.



- 3 -

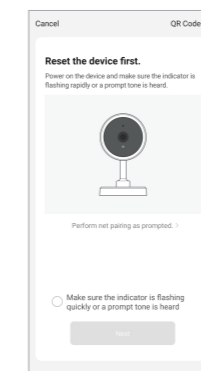

③ Check the doorbell, if the red LED on the device flashes, it indicates it is receiving the configuration data from the device. Click "Make sure the indicator is flashing quickly or a prompt tone is heard", Click Next.

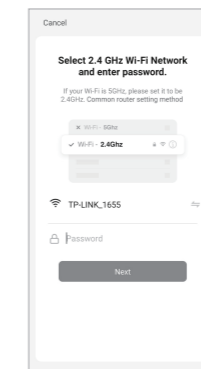


④ Input the WiFi name & password to connect the device to WiFi, click Next.  
Note: The mobile device must be connected to a 2.4GHz WiFi Network

- 4 -




⑤ QR Code will pop up in the screen of mobile phone. Please put the QR Code in front of doorbell at 15-20 cm. On receiving a voice prompt, tap on "I Heard a Prompt" button on the App.

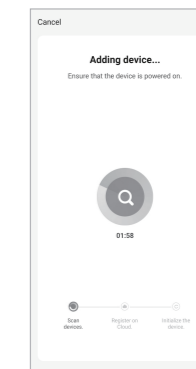

⑥ After confirming, it will notify that it is connecting to the LAN, and then go to the countdown interface.

- 5 -

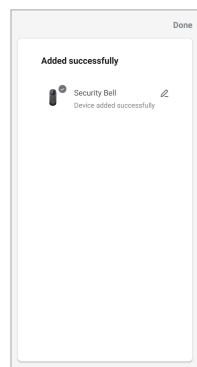

⑦ After binding successfully, take a name for the device, and click Done.

## 2. How to pair and unpair the indoor ding-dong unit and the door-bell

① Pair: Plug the indoor ding-dong unit into power and wait until blue LED is on, then press the doorbell button. When blue LED on indoor ding-dong unit flashes, the pairing is completed. (You can switch the ringtone by pressing music button on the indoor ding-dong unit)

② Unpair: Unplug the paired indoor ding-dong unit, and press the volume button, then plug into the power again, release until the blue LED is always on. The unpaired is completed.

## 3. Camera Installation Method

Special Note:

- ① Keep the doorbell, indoor ding-dong unit and router as close as possible (to avoid network failure due to too far).
- ② The installation height of the doorbell is 1.2~1.5 meters.
- ③ It should be installed on non-metallic materials (to avoid signal shielding), and it is recommended to stick it on the side wall of the door.


- 6 -

## Installation method 1: glue on the wall and fix it (recommended)

① Tear off the red 3M adhesive sticker at the bottom of the upper wall base, and then paste the upper wall base on a smooth wall (such as glass, ceramic tiles, latex wall paint, etc.)


② Hang the doorbell from top to bottom on the base of the upper wall to complete the installation.

Note: The adhesive can only play 100% viscosity after 24 hours after it is glued.

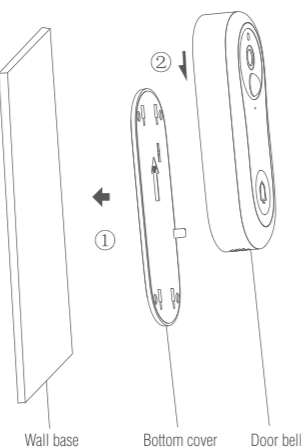

- 7 -


## Installation method 2: Fix on the wall with screws

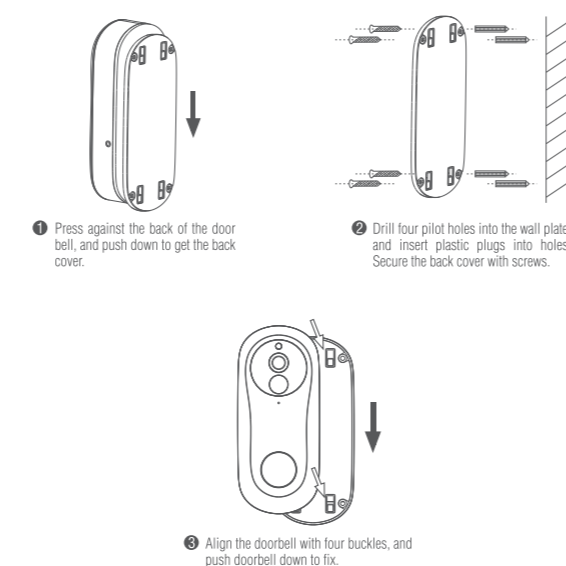

- 8 -

Installation anti-dismantling diagram:

① Install a screw to lock the doorbell and rear panel

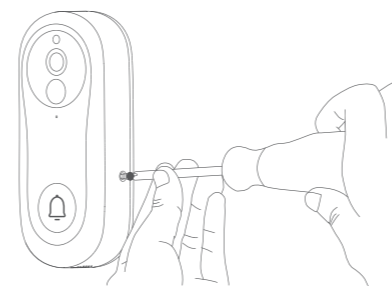

- 9 -

## VI. Function Description

1. Definition: 1080P (1920\*1080) super clear resolution, clear picture, delicate and realistic.

2. Viewing angle: With a 148° large wide-angle lens, the view is wide, and the whole family has a panoramic view.

3. Two-way audio: Bring you real-time intercom, to make the communication easy.

4. Night vision: The camera will turn on the night vision function automatically according to the ambient light. After opening the screen will appear black and white, indoor conditions are clearly visible in 7 meters.

5. Recording storage: support video recording and screenshots, support for guest visits, automatic recording; visitors press the doorbell, will notify the phone, will also automatically record video to the Micro SD card, you can view the visitor record.

6. PIR motion detection: Send alert to your phone when visitor is at your front door or when motion detection is triggered.

7. Instant alert: Get instant alerts when visitor presses the doorbell or when the built-in motion sensor is triggered. You can watch real-time videos, intercom with the visitor via your phone.

- 10 -

## VII. Common Problems

1. Video Doorbell LED indicator and buzzer status:

Status	LED light	Buzzer
System startup	Red light flashes	None
Waiting for distribution network	Red light flashes	None
Scanning QR code	Red light flashes	None
Scanning the QR code successfully	Red light flashes	DI (short sound)
Connecting WiFi	Red light flashes quickly	None
Connect to WiFi successfully	LED light is off	None
Failed to connect WiFi	Red light flashes	None
Reset success	Red light flashes	DI (short sound)
PIR wake up	Blue light flashes	None
Wake up by doorbell	Blue light flashes	None
Low battery reminder	Red light keep on 5s	None

2. Note: Make sure the Doorbell is connected to WiFi in the 2.4 GHz band.

5G WiFi is not supported. Please make sure that the WiFi signal of the wireless router connected to the doorbell is within the coverage.

3. What is the Operating Temperature of the Video Doorbell?

The applicable temperature range: -10°C to +50°C.

Thank You!

Whatsapp & Support

81-81-81-0654 | 844-77-46047

Support: [www.urjasmart.com/support](http://www.urjasmart.com/support)

- 11 -