



Trade, DIY, Bulk

POCKET DOOR SYSTEMS




The quick fit pocket door system

Key features:

- Easy to install rigid frame, supplied pre-assembled.
- Fitted in half the time of other brands.
- Designed for stud and plasterboard.
- Gives a finished wall thickness of 125mm.
- Suits door thicknesses 35 – 44mm.
- Maximum door weight 120Kg.
- Compatible sliding door hardware available.
- Available in single and double format.
- Timber end post and trim included.
- Door and architrave sold separately.

DOUBLE

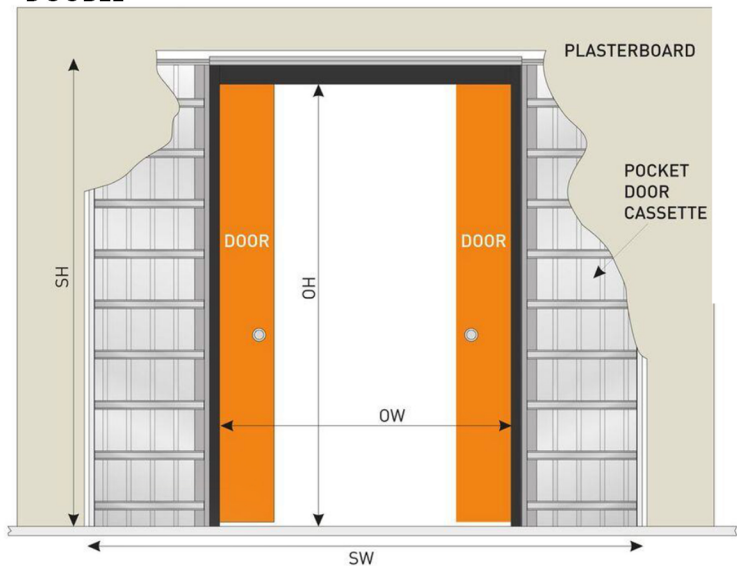

Single Pocket Door – Size Guide

mm	Door Size		Clear Opening Size (walkthrough area)		Structural Opening Size of the Unit		Finished Wall Thickness
	Width	Height	Width (OW)	Height (OH)	Width (SW)	Height (SH)	
POCSYSSGL686	686	1981	650	1970	1425	2075	125
POCSYSSGL762	762	1981	740	1970	1625	2075	125
POCSYSSGL838	838	1981	800	1970	1725	2075	125
POCSYSSGL915	915	1981	890	1970	1925	2075	125

Double Pocket Door – Size Guide

mm	Door Size (individual)		Clear Opening Size (walkthrough area)		Structural Opening Size of the Unit		Finished Wall Thickness
	Width	Height	Width (OW)	Height (OH)	Width (SW)	Height (SH)	
DBLLEAFKIT686	686	1981	1300	1970	2742	2075	125
DBLLEAFKIT762	762	1981	1500	1970	3142	2075	125
DBLLEAFKIT838	838	1981	1600	1970	3342	2075	125
DBLLEAFKIT915	915	1981	1800	1970	3742	2075	125

SINGLE

