

IACT16I-XXX SERIES

The IACT16I series consists of split-core current transformers designed for electronic measurement of AC waveform currents, ensuring galvanic isolation between primary and secondary circuits.

The small spacing for the physical size options (10mm/0.39", 16mm/0.63", 24mm/0.94", 36mm/1.42") allows for flexible installation. Each CT size has a hinge and clipping mechanism that makes it easy to close the CT in tight situations. The CT comes with an 8-foot long twisted pair wire and a 2-pin CT plug.

Specifically tailored for SENSWAY IoT meters with embedded CTids, the ratio error and phase displacement of the IACT16I series have been rigorously tested and meet the accuracy requirements of the IEC 61869-2 Class 1.0 and IEEE/ANSI C57.13 Class 1.2 standards.



Key Features


- Current rating: 50A up to 100Amps
- 333mV RMS at rated output
- Accuracy within 1% from 1% to 100% of rated current
- 50Hz/60Hz operation
- Maximum primary insulation up to 600 V RMS
- UL61010-1, EN61010-1 certified



Model	Rated Amps	Output	Accuracy	Internal Burden (Ohms)
IACT16I-050	50A	333mV RMS	1%	20.15
IACT16I-100	100A	333mV RMS	1%	10.09

Note: the burden resistor is built into the IACT16I-XXX SERIES.

How to Use

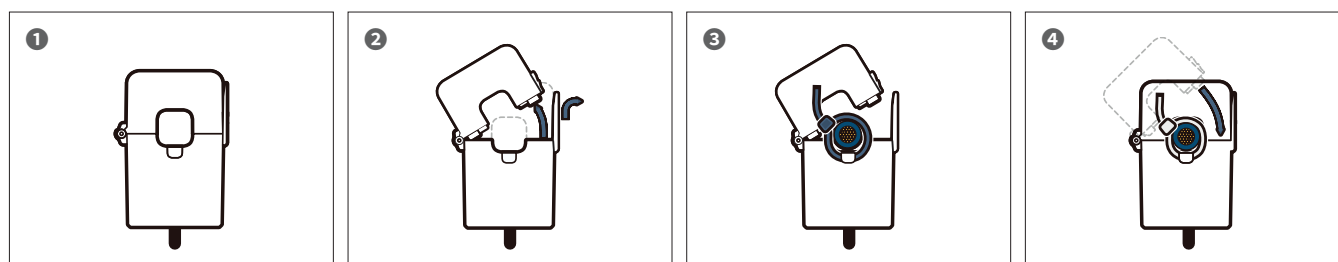

Please refer to "Split-core Current Transformer Installation Guide" for further details.

1. Specifications

- **Line Frequency** : 50 to 60 Hz
- **Maximum Continuous Primary Current** : 120% of rated current
- **Maximum Voltage** : 600 Vac
- **Overvoltage and Measurement Category** : CAT III: 600 Vac
- **Output Lead Wires** :
 - Standard length : 8 ft (2.44 m)
 - Gauge : #26 AWG
- **Voltage** : 600 Vac
- **Output** : Output Voltage is depends on built-in burden resistor
 - Output Voltage at Rated Amps: 333 mV
 - Output Protection: built-in burden resistor

1.1 Accuracy

- **Ratio Error** :
 - Accuracy 1.0% conforms to IEC 61869-2 & IEEE/ANSI C57.13 meets the measuring range from 1% to 100% rated amps
- **Phase Angle** :
 - 50/60 Hz - 0.0 to 1.0 degrees leading from 1% to 120% of rated current

1.2 Regulatory

- CE
- UL/EN61010-1(PICQ) : Pollution Degree: 2 CAT III, 600 Vac
- RoHS Compliant


1.3 Environmental

- **Operating Temperature** : -20°C to +55°C (-4°F to +131°F)
- **Operating Humidity** : Non-condensing, 0 to 85% relative humidity(RH)
- **Operating Altitude** : Up to 2000 m (6561 feet)
- **Pollution Degree** : 2 (controlled environment)
- **Indoor Use** : Suitable for indoor use


1.4 Mechanical

- **Width** : 1.18 inches(30 mm)
 - **Height** : 1.78 inches(45.2 mm)
 - **Thickness** : 1.24 inches(31.6 mm)
 - **Opening** : 0.63 inches(16 mm)
 - **Weight** : 104.03(±3) g
 - **Core material** : high permeability ferrite
-

Dimensions IACT16I-XXX SERIES

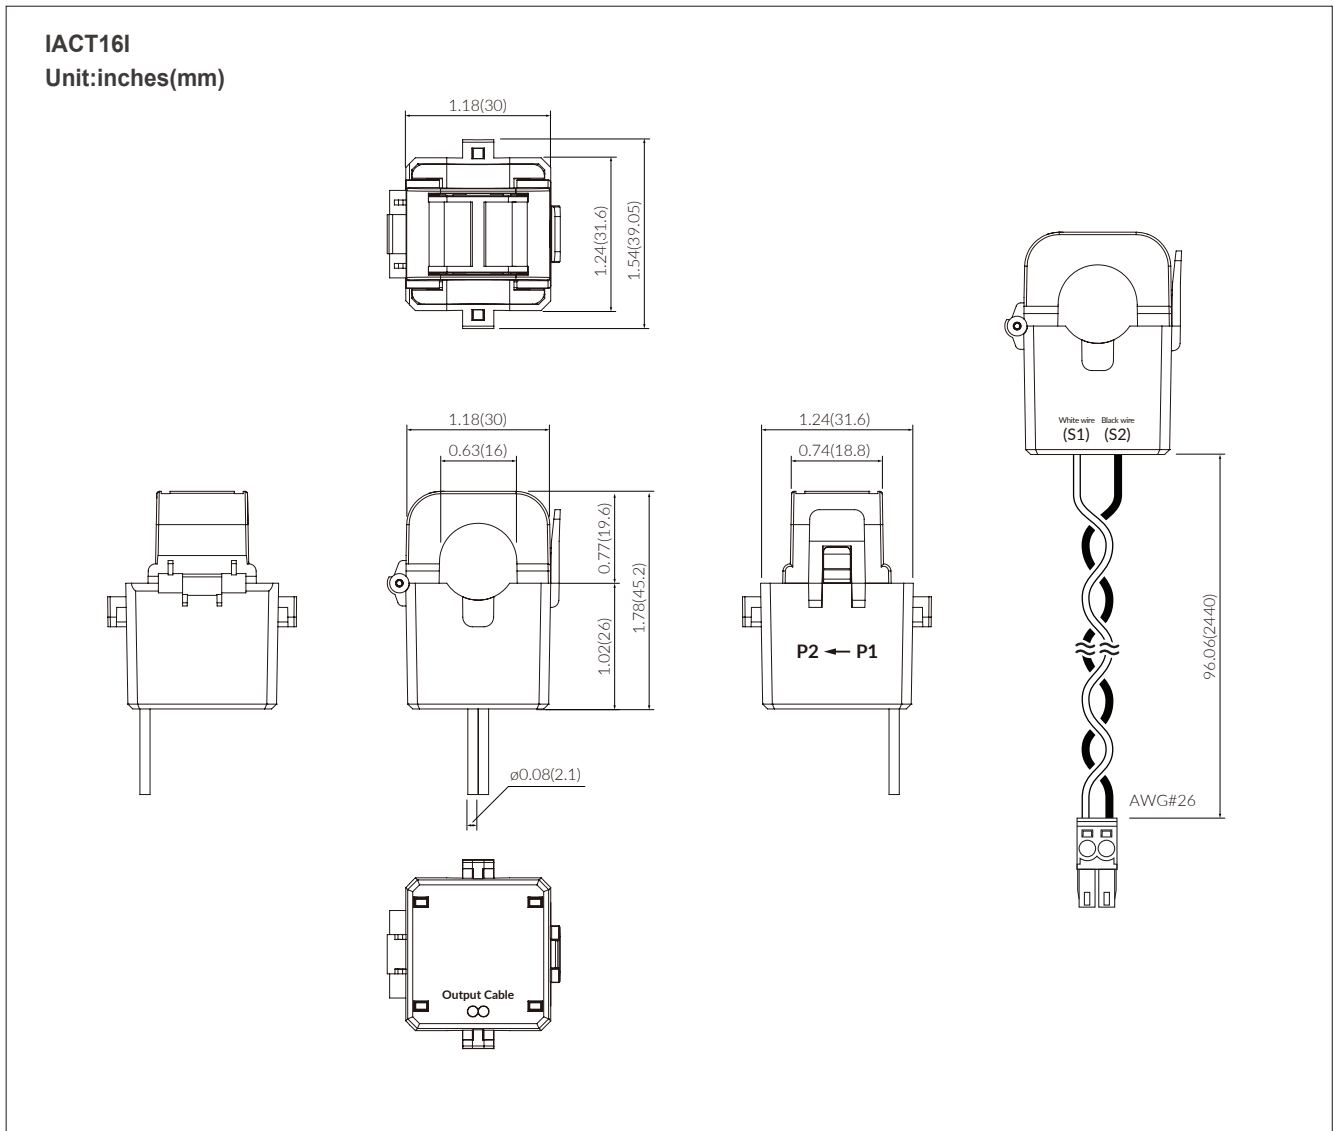


1.5 Labels

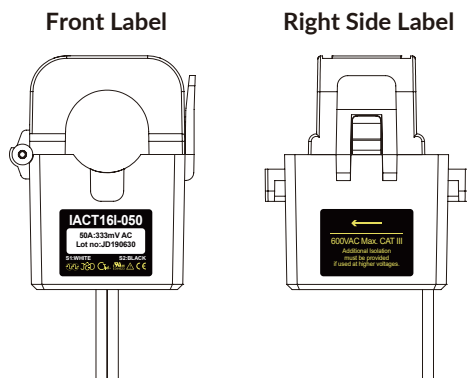


- **Orientation** : Mount the CT referring to the right side label attached(P1->P2).

1.6 Connection

Unit: inches(mm)

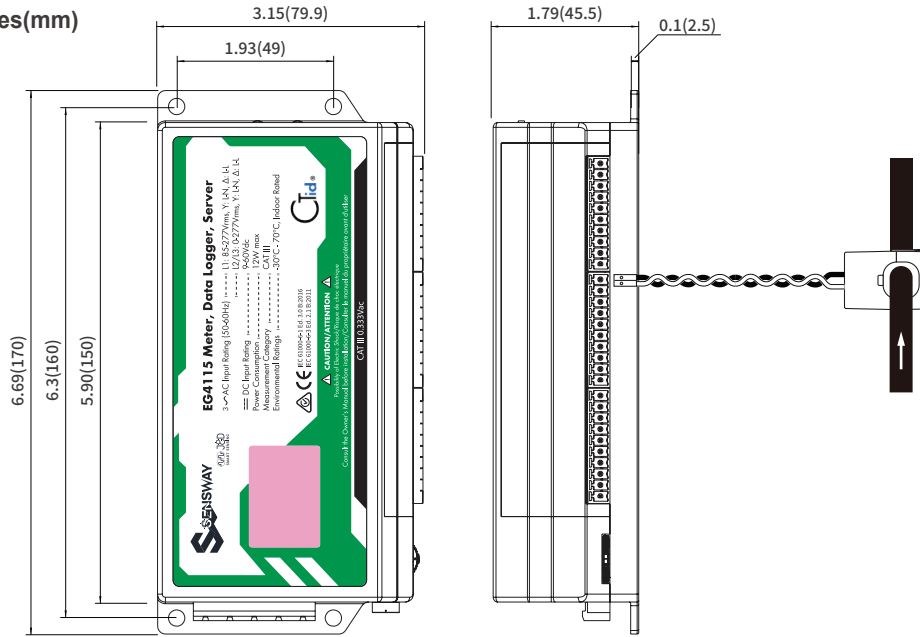


• CT housing color options : Black, White



LED light flashes when commanded through the interface.


1.7 Schematic Diagram

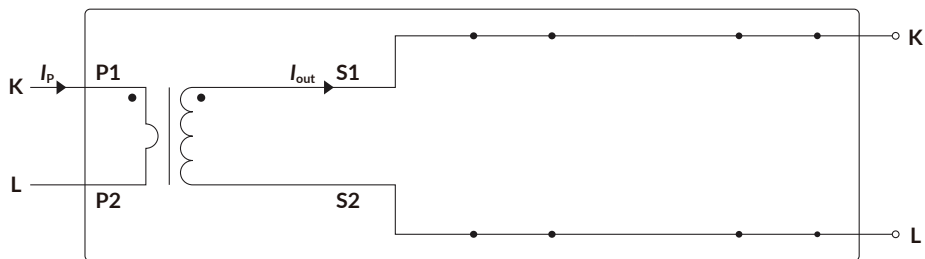


2. Typical Accuracy

- In the following graphs, a positive phase angle error indicates that the output of the CT leads the primary current.
- Graphs show typical performance at 25°C(77°F), 50/60 Hz

2.1 IACT16I-050

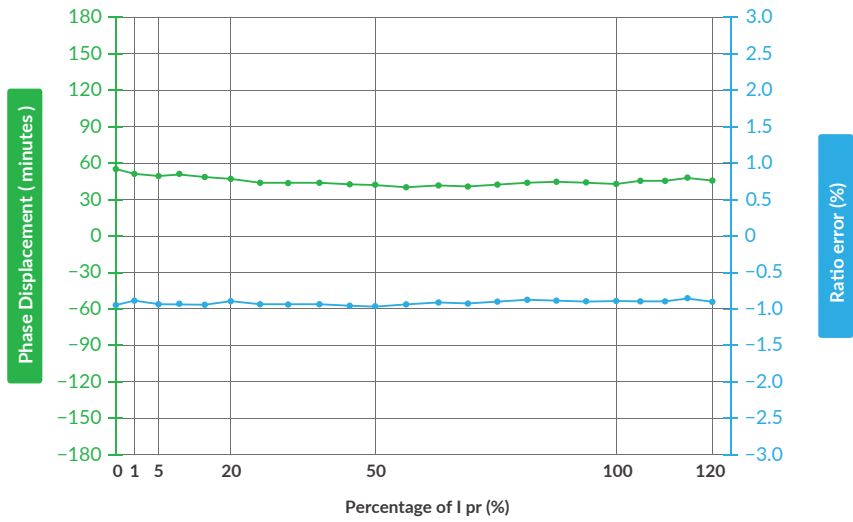

2.2 IACT16I-100

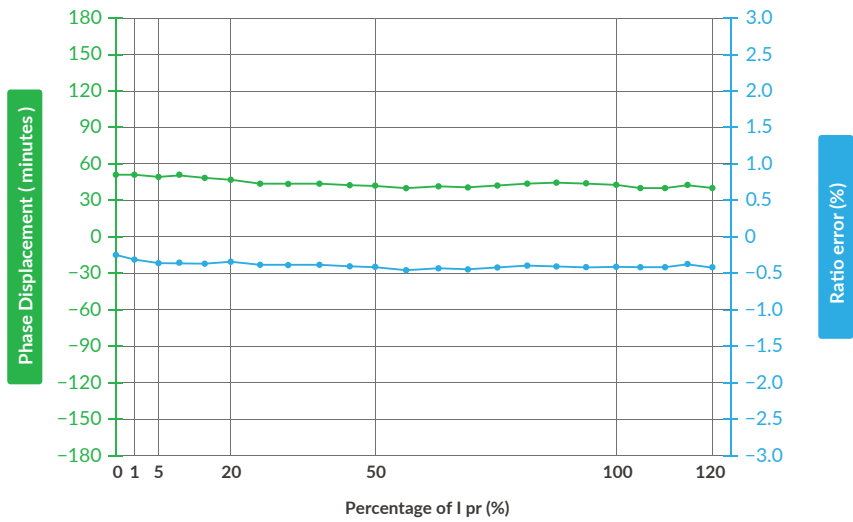

3. Safety

The J&D CTs are UL/EN 61010-1, CE, RoHS compliant and certified, are also conformed up to Pollution degree 2, 600Vac CAT III rated devices.



Please be sure that Failure to follow these instructions can result in serious injury and/or cause damage.

The transducer shall be used in electric/electronic equipment in accordance with the operating instructions of all related systems and component manufacturers with respect to applicable standards and safety requirements.

Follow corresponding national regulations and safe electrical work practices.

This equipment must only be installed and serviced by qualified personnel. And the qualified personnel is one who has skills and knowledge related to the construction and operation of this electrical equipment and installations, and has received safety training to recognize and avoid the hazards involved.



When operating the transducer, there may be dangerous active voltages (e.g. primary conductor) in certain parts of the module. Users should make sure to take all necessary steps to protect against electric shock. The transducer is a built-in device containing conductive parts that are inaccessible after installation.

Therefore, a protective enclosure or additional insulation barrier is necessary.

Safe and trouble-free operation of this converter can only be guaranteed if transport, storage and installation are carried out correctly and operation and maintenance are carried out carefully.

4. Remark

- V_o is positive when I_p flows in the direction of the arrow. (o : output, p : primary current)
- Temperature of the primary conductor should not exceed 55°C(131°F).
- Dynamic performances (di/dt and delay time) are the best with a single bar when the primary hole is completely filled.

5. Attention

Contact areas (air gap) must be kept clean (particle free) to ensure proper performance.