

MUNDUS UNIVERSAL RP BEYOND EA TP/TA MANET Compact/ Concept SG Wall connection profile MR 22/MR 28

## **Fittings for Toughened Glass Assemblies** Technical brochure 2021

dormakaba 🚧



## Content



06

88

**MUNDUS** Cowmponents for toughened glass assemblies



40

UNIVERSAL Components for toughened glass assemblies



72

**RP** Double-action door system for toughened glass assemblies



78

BEYOND Double-action door system for toughened glass assemblies



**EA** Components for single-action doors



102 **TP/TA** Door rails for double-action and single-action doors



132 MANET Compact Single-point fitting system, stainless steel



138 MANET Concept Single-point fitting system, stainless steel



148 MANET Concept Connection system



154 **SG** Centre and corner locks for toughened glass assemblies



176 Wall connection profile Bearing wall connecting profile system



182 MR 22/MR 28 Wall connecting profile system, non-bearing



188 Accessories

# The dormakaba range of fittings for toughened glass assemblies

The dormakaba range of fittings for toughened glass assemblies has matured into one of the most comprehensive available today. It offers ideal options for creating all standard toughened glass assemblies in a manner which is technically sound and visually attractive. This gives the designer a wide variety of options for individual expression in creating with toughened glass – either internally or externally. All dormakaba fittings are based on a modular system, consisting of a base unit, functional inserts and clip-on covers in the widest possible range of finishes. The glass preparations that are needed can be performed quickly and easily. Quality materials and thorough workmanship guarantee a long service life and a reflection of excellence for years to come.

Applications and features		UNDUS rt/Premium	UNIVERSAL patch fittings		EA
For external assemblies	•	٠	•		٠
For internal assemblies	•	٠	•	•	٠
For standard toughened glass assembly types	•	٠	•	•	٠
For individually designed assemblies with corner fittings, fin fittings etc.			•		
For double-action doors	•	•	•	•	
For single-action doors	٠	•	•	•	•
Glass thickness (mm) (Generally, glass thickness tolerances within the +/- 0.5 mm range can be accommodated)	8-12	8-22	8, 10, 12 <sup>6)</sup>	10, 12	8, 10, 12
Glass thickness (mm), for UNIVERSAL with 15 mm pivot point			8, 10		
Max. door weight (kg)	150	200	1102)5)	80	80/1104)
Max. door weight (kg) for UNIVERSAL with 15 mm pivot point			80		
Max. door width (mm)	1,100	1,300	1,1002)5)	1,000/1,2004)	1.000/ 1.100 <sup>4)</sup>
Max. door height (mm)		see Matrix for door dimensions, page 10		2,200/ 3,000 <sup>4)5)</sup>	3.000 <sup>1)2)</sup>
Glass type	TSG	TSG/LSG <sup>3)</sup>	TSG	TSG	ESG
Double-action / single-action door	sa/da	sa/da	sa/da	sa/da	Α
Materials and finishes					
Aluminum, mill finish (Aluminum R 600) (100)					
Aluminum, silver EV1 anodized (similar Eloxal I EV1 / Eloxal II C 0) (101)			•		٠
Aluminum EV1-Deco anodized (compatible with finish 150)				•	
Aluminum, similar satin stainless steel anodized (113, 107)				• (107)	• (107)
Aluminum, silver anodized (Silver N 600 ST) (compatible with finish 114) (150)	•	٠			
Aluminum special color anodized (199)		•	•		•
Aluminum, traffic white powder coated (300)					•
Aluminum, white powder coated (White P 100 SG) (350, RAL 9016)	•	•	•		
Aluminum, special color powder coated (399)			•		•
Brass, polished chromed (501)			•		٠
Brass, polished varnished (502)					
Brass, polished (503)			•		•
Satin stainless steel (Niro S 700 ST) (700)			•		
Polished stainless steel (Niro S 700 HG) (701)			•		
Satin stainless steel (750)	•	•			
Polished stainless steel (751)	•	•			
Page		6	40	78	94

Door rails and locks ideally complement the dormakaba product range for toughened glass assemblies. The door rails grant all requests for wide and heavy doors, also for side panels. They guarantee the maximum protection for the lower glass edge.

With its different types and finishes the lock programme SG meets various requirements for function, safety and appearance.

TP/TA	MANET Compact	SG	Wall connection profile	MR 22/ MR 28
•		•	٠	
•	•	•	•	•
٠	•	٠	•	
0				
•	•	0	0	
•	0	0		
8, 10, 10.76 12, 12.76, 13,5, 15, 17, 19, 21	10, 12	8, 10, 12	8, 10, 12, 12,7, 13,5, 15, 17, 19	6, 8, 10
150*	00		(Elec./	
150*	80		45 kg/m	
1,400*	1,200			
3,500 <sup>1)2)5)</sup> 4,000 <sup>4)</sup>	2,500 <sup>1)2)5</sup>		3,0001)2)5	2,500/ 2,800 <sup>1)2)5</sup>
TSG/LSG <sup>3)</sup>	TSG	TSG	TSG/LSG <sup>3)</sup>	TSG
sa/da	sa/da	sa/da		
•			•	
•		•	•	•
		•	•	•
•				
		•	•	
•		•		
			•	
	•		•	
•	-		•	
			•	
102	132	154	176	182
• • 102	•	154	• • • 176	182

- <sup>1)</sup> For door heights up to 2,500 mm For doors with a height of more than 2,500 mm we have to keep additional conditions/limits:
  - Glass thickness >/= 10 mm
  - Usage of a handle bar with 3 connection points in minimum and a minimum height of 1/2 door height
- <sup>2)</sup> Use of door closers: Doors < / = 1,100 mm must be provided with door closers of type EN 3 (with or without backcheck), and doors > / = 1,100 mm need to be fitted with larger door closers (e.g. EN 4, 5 or 6) with or without backcheck.
- <sup>3)</sup> Laminated safety glass of 2 x toughened safety glass
- <sup>4)</sup> Max. panel weight depends on product combination
- <sup>5)</sup> Further possible glass panel heights on request at our application engineering
- <sup>6)</sup> Under certain circumstances also 15 + 19 mm glass thicknesses

The glass dimension may differ due to items as follows:

- installation type,
- glass tolerance,
- generally use
- 0 Optional
- Standard
   \*Only for double-action doors with door rail top and botton, incl. steel door lever

**Note:** The use of clamp fittings on structured glass surfaces (except of which are satinized glasses) or glasses with large variations in glass thickness is only with the application of a levelling layer permissible.

# **Content** MUNDUS

 $\mathbf{S}$ General information 09**Technical information** 10 Matrix MUNDUS 12 Clamp&Glue technology 14 Type illustration 16 **Technical details** 18 Components 29 Installation details 30 **Accessories MUNDUS** 34 **Glass** preparation 188 Accessories 212 Safety-related information



# MUNDUS

### MUNDUS – The freedom of versatility

#### **Compelling benefits:**

- Clear design lines, no visible fixings
- Wide range of surface finishes, colours and materials
- Particularly easy to install: Many MUNDUS fittings can be mounted on the glass and fixed into place in their as-delivered condition
- Fast installation, simple in-situ adjustment of the installed system
- set up for the right glass thickness: adaptable to different glass thicknesses without the need to change gaskets
- Improved load-bearing performance and more secure hold thanks to high-strength materials (screws and threaded sleeves of high-grade stainless steel capable of absorbing high clamping forces)
- Use of laminated safety glass (LSG) using dormakaba's proven Clamp&Glue technology for high quality and safety demands (MUNDUS Premium)

#### **Elegant** appearance

MUNDUS fittings impress through their elegant design combining sharply defined, straight edges and rounded corners, high-quality materials and careful workmanship. There are no fixings to disrupt the smooth harmony of the surface finish. For a durable, elegant appearance, the cap consists of 2 mm thick and therefore particularly robust material – stainless steel or aluminum.

### MUNDUS offers patch fittings for 24 standard systems and numerous special solutions

- whether for an open-plan residential ambience, attractive office or prestigious shop entrance. Visually and technically impressive, MUNDUS glass fittings are suitable for a wide range of different requirements. The extensive portfolio encompasses connection fittings for the usual 24 standard systems such as PT 10, PT 40 or PT 70. It also accommodates special solutions for custom spatial requirements, such as PT 41 and PT 61 for glass assemblies stiffened with 90° glass fins.


#### Quick and easy to install

MUNDUS fittings offer multi-dimensional in-situ adjustability, ensuring a firm fit every time. They facilitate infinite variability of the vertical gap dimensions and thus consistently correct setting of the pivot axis and zero position.



#### Wide choice of finishes

### MUNDUS – the technical specifications at a glance

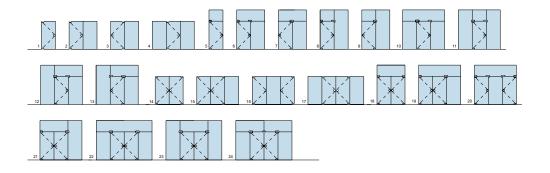

MUNDUS	MUNDU	S Premium	MUNDU	S Comfort
Max. load-bearing capacity	200 kg		150 kg	
Max. panel width	1,30	00 mm	1,10	)0 mm
		dth depends on glass t on the following page	0	
Possible glass thickness	8–12 mm 12–15 mm 15–19 mm 19–22 mm		8-1	.2 mm
Suitable for LSG*		•		_
Supported pivot points in mm	55, 65, 70 mm		55, 65, 70 mm	
Offset adjustability in mm	Infinite (± 3 mm); 52–73 mm		Infinite (± 3 mm); 52–73 mm	
Adjustability of the door/insert	Multi-d	imensional	Multi-dimensional	
Cover materials	Stainless steel, c	Iluminum, glass etc.	Stainless steel, aluminum	
Test cycles:	1,0	00,000	500,000	
Inhouse-Test according to EN 12400 Inhouse-Test according to EN 1670	Test certificates fr	om an external accredit	ed authority can be	provided on request.
Materials and finishes	Availability	Corrosion class	Availability	Corrosion class
Standard collection				
Aluminum, white powder coated (White P 100 SG) (350, RAL 9016)	•	4	•	4
Aluminum, silver anodized (Silver N 600 ST) (compatible with finish 114) (150)	٠	4	•	4
Satin stainless steel (Niro S 700 ST) (for MUNDUS) (750)	•	4	•	4

•	4	•	4
•	4	_	
•	4	_	
•	4	_	
	• • • • • •	4      4      4      4      4      4      4      4      4	• • • • • • • • • • • • • • • • • • •

•

1 - 4 Corrosion class according to EN 1670 (independent test confirmation on request) • Standard - not available

\* LSG out of 2 x TSG (= 2 panes each with a minimum glass thickness of 5 mm). Can be implemented with separately ordered gaskets and deploying dormakaba's proven Clamp&Glue technology.

4

•

Polished stainless steel (Niro S 700 HG)

(for MUNDUS) (751)

4

### **MUNDUS – Matrix for door dimensions**

#### This matrix is only used to select the correct fitting and does not represent a static!

height		8 mm width					nm gla (mm)			-15 m width				5–19 n width					nm gla (mm)	
(mm)	1,000	1,100	1,200	1,300	1,000	1,100	1,200	1,300	1,000	1,100	1,200	1,300	1,000	1,100	1,200	1,300	1,000	1,100	1,200	1,300
2,000																				
2,100																				
2,200																				
2,300																				
2,400																				
2,500																				
2,600																				
2,700																				
2,800																				
2,900																				
3,000																				
3,100																				
3,200																				
3,300																				
3,400																				
3,500																				
3,600																				
3,700																				
3,800																				
3,900																				
4,000																				



Suitable for use without any technical limitations.

Pull handle necessary extending over 1/2 of the door height with at least 3 fixing points.

Glass and fitting must be adhesive-bonded. Use of MUNDUS fittings is not recommended. Please contact your dormakaba partner

in order to discuss possible alternatives. This door dimension is unfortunately not possible with MUNDUS.

MUNDUS

Technical information

### Extensive suitability, effortless installation






#### MUNDUS Premium – Providing a totally reliable hold – Clamp&Glue technology

### Providing a totally reliable hold – Clamp&Glue technology

Proven dormakaba technology for the installation of laminated safety glass. An additional adhesive bond ensures a firm hold and permanent cohesion between fitting and glass.

### The bonding process following the fixing of the fitting is remarkably easy:

- Before commencing with the gluing operation, you will need to replace the standard gaskets with special gaskets suitable for laminated safety glass\*
- The glue is fed through the holes provided until it emerges from the overflow openings in the clamp fittings
- The process is then repeated on the rear face
- Allow the glue to harden.




\*The LSG gaskets may only be used when fixing glass using the Clamp&Glue technology


## MUNDUS and laminated safety glass (LSG) – a combination that offers impressive advantages:

- High safety for users, even in the case of large glass assemblies
- Improved acoustic insulation and reduced noise levels achievable by integrating a sound deadening film
- Deploying glass doors as a design element specially designed films for individual aesthetics
- Use of LSG comprising 2 x TSG (= 2 panes each with a minimum glass thickness of 5 mm).

### Type illustration

#### Toughened glass assemblies with fittings (55/65/70 mm pivot point) and locks.

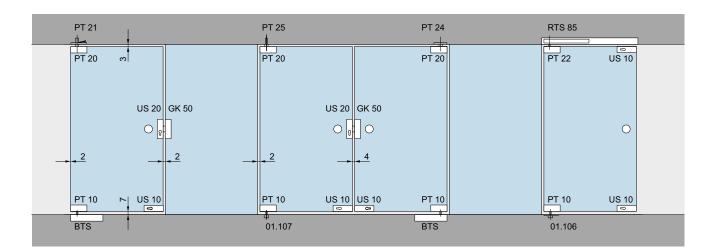

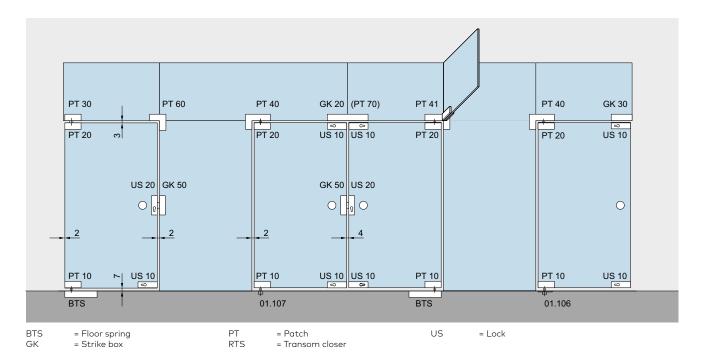

### Maximum door weight and width for MUNDUS fittings

Max. door weight: MUNDUS Premium: 200 kg MUNDUS Comfort: 150 kg

Max. door width: MUNDUS Premium: 1,300 mm MUNDUS Comfort: 1,100 mm For doors with a height of more than 2,500 mm we should keep additional conditions/limits:

- Glass thickness  $\geq$  10 mm
- Usage of a handle bar with 3 connection points in minimum and a minimum height of 1/2 door height

The max. panel width depends on glass thickness and weight. For more information please see on page 10, MUNDUS - Matrix for door dimensions.

#### Use of door closers:


Doors < / = 1,100 mm must be provided with door closers of type EN 3 (with or without backcheck), and doors > / = 1,100 mm need to be fitted with larger door closers (e.g. EN 4, 5 or 6) with or without backcheck.

#### **Glass panels**

The individual glass panels may show production tolerances in geometry and dimensions that sum up to larger deviations in larger glass assemblies. These deviations are not shown in the exemplary constructional set up above.

#### Note for stiffening elements:

"Left" or "Right" is always determined from the outside and as viewed from above.



۲

65 mm

0

### Easy to install, easy to adjust


#### Fast and uncomplicated fixing


55 mm

MUNDUS patch fittings always fit snugly on the glass thanks to their multi-dimensional variability. They facilitate infinite adjustment of the vertical gap dimensions and location accuracy in terms of both pivot point and zero position.


#### Optimum gap dimensions

Thanks to the infinitely variable, multi-dimensional adjustability of the patch fittings, the door can be optimally aligned following installation.






#### Multi-dimensional adjustability even when mounted

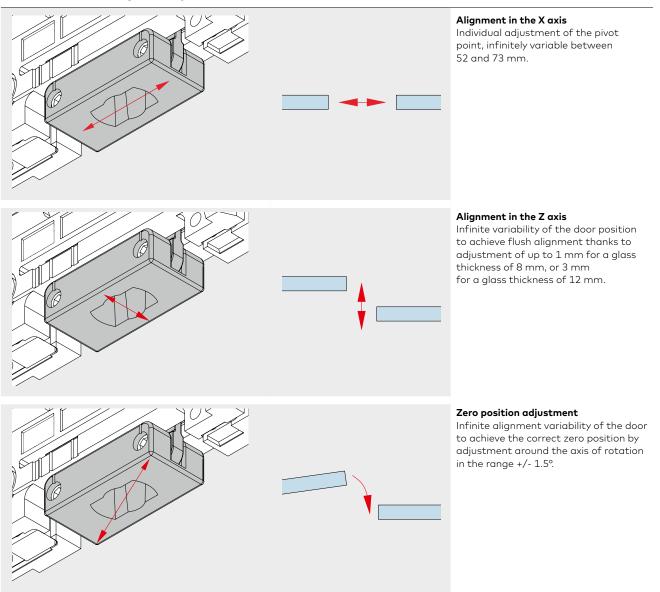

#### Easy to install, safe and secure

With MUNDUS, you do not require new or additional gaskets in order to adjust the fittings to the glass thickness. With MUNDUS, the glass thickness is defined by two screws in the base unit of the patch fitting, allowing the use of glazing ranging from 8 to 22 mm.



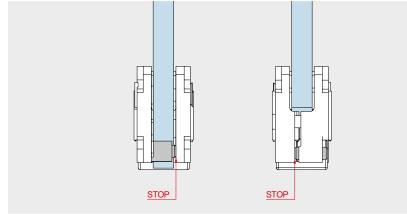

#### Suitable for different glass thicknesses

MUNDUS Premium: Accommodating glass thicknesses of 8–12 mm, 12–15 mm, 15–19 mm and 19–22 mm with infinite adjustability in a single fitting. The gaskets that you had to separately order for toughened safety glass are now a thing of the past. You always have the right fitting to hand. That means: fast installation, more time, more design content.

Glass thickness:	8–12 mm
	12–15 mm
	15–19 mm
	19–22 mm
Max. Door weights:	200 kg

#### MUNDUS Comfort:

Glass thickness: 8–12 mm Max. Door weights: 150 kg


#### Protection from unauthorised access

The positioning of the clamping screws also provides for additional protection against unauthorised access to your interiors. The screws are distributed on both sides of the base unit so that disassembly from one side is not possible.



### **Patch fittings**

#### Shown with 10 mm glass. When used with other glass thicknesses, the measurements change accordingly.

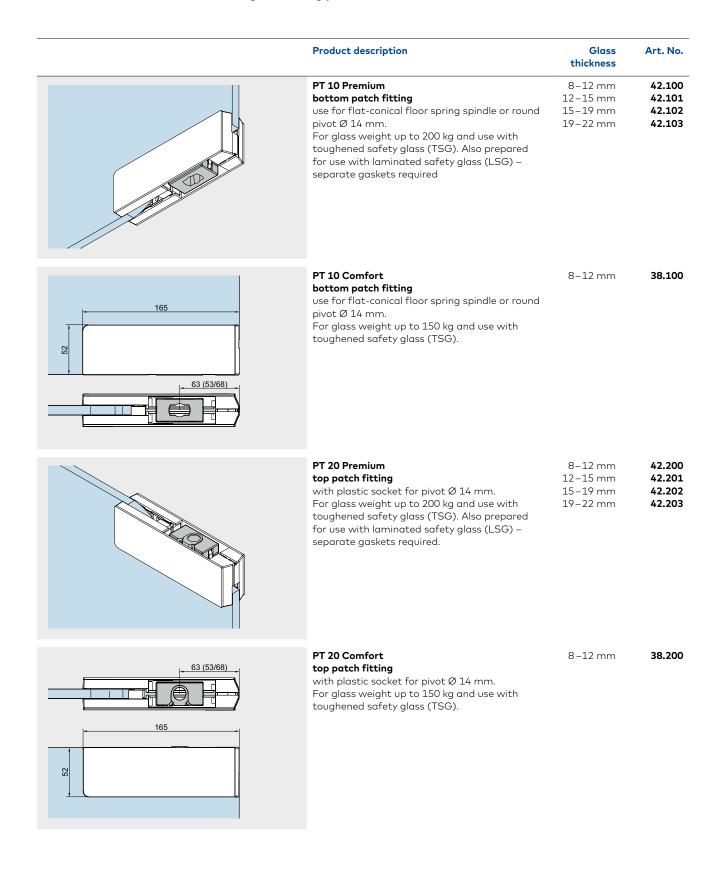

Product description	Glass thickness	Art. No.
PT 22 Premium* top patch fitting for a glass weight up to 80 kg with insert for transom closer RTS. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.	8–12 mm 12–15 mm 15–19 mm 19–22 mm	42.220 42.221 42.222 42.223
<b>PT 22 Comfort*</b> <b>top patch fitting</b> with insert for transom closer RTS. For use with toughened safety glass (TSG).	8-12 mm	38.220
<b>PT 30 Premium</b> overpanel patch fitting with pivot Ø 14 mm and M 8 tapped hole at side. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) − separate gaskets required.	8–12 mm 12–15 mm 15–19 mm 19–22 mm	42.300 42.301 42.302 42.310
<b>PT 30 Comfort</b> overpanel patch fitting with pivot Ø 14 mm and M 8 tapped hole at side. for use with toughened safety glass (TSG).	8-12 mm	38.300
* The maximum permissible door heights and door widths used and its spring strength / closing force. The maximu combination with an RTS transom-concealed door close allowable panel width is 1,100 mm.	um allowable door	weight in

Product description	Glass thickness	Art. No.
<b>PT 30 Premium</b> overpanel patch fitting with stop insert. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.	8–15 mm 15–19 mm 19–22 mm	42.303 42.305 42.311
<b>PT 30 Comfort</b> overpanel patch with stop insert. For use with toughened safety glass (TSG).	8–15 mm	38.303
<b>PT 30 Premium</b> overpanel patch fitting with blanking insert. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.	8-15 mm 15-19 mm 19-22 mm	42.306 42.308 42.312
<b>PT 30 Comfort</b> overpanel patch with blanking insert. For use with toughened safety glass (TSG).	8–15 mm	38.306
Fixing plate for MUNDUS overpanel patch fitting PT 30 and MUNDUS overpanel strike box GK 30 Weight in kg: 0.039 Only available in satinized stainless steel, polished stainless steel or powder-coated stainless steel. Optionally wall anchor and threaded rod are applicable. (see page 31.)		38.313


	Product description	Glass thickness	Art. No.
A REAL PROPERTY OF A REAL PROPER	PT 40 Premium patch for overpanel and sidelightwith pivot Ø 14 mm.For use with toughened safety glass (TSG).Also prepared for use with laminated safety glass (LSG) – separate gaskets required.Please note:The load-bearing capability of the overpanel (fan light) is only ensured when using suitable 	8–12 mm 12–15 mm 15–19 mm 19–22 mm	42.400 42.401 42.402 42.470
	<b>PT 40 Comfort</b> <b>patch for overpanel and sidelight</b> with pivot Ø 14 mm. For use with toughened safety glass (TSG). <b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.	8–12 mm	38.400
	PT 40 Premium patch for overpanel and sidelight with stop insert. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required. Please note: The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.	8–15 mm 15–19 mm 19–22 mm	42.403 42.405 42.471
	<b>PT 40 Comfort</b> <b>patch for overpanel and sidelight</b> with stop insert. For use with toughened safety glass (TSG). <b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.	8–15 mm	38.403

	Product description			Glass thickness	Art. No.
	Also prepared for use glass (LSG) – separa Please note: The load-bearing cap	ed safety glass (TSG). with laminated safety te gaskets required. ability of the overpane ured when using suitab		8-15 mm 15-19 mm 19-22 mm	42.406 42.408 42.409
	Please note: The load-bearing cap	ed safety glass (TSG). ability of the overpane ured when using suitab		8–15 mm	38.406
left	PT 41 Premium patch for overpanel and sidelight with pivot pin Ø 14 mm and fin fitting*. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.	with pivot pin with stop insert	left right left	8-12 mm 12-15 mm 15-19 mm 19-22 mm 2-15 mm 12-15 mm 19-22 mm 8-15 mm 15-19 mm 15-19 mm 19-22 mm	42.410 42.411 42.422 42.472 42.420 42.421 42.422 42.474 42.413 42.415 42.473
		with blanking insert	right	8-15 mm 15-19 mm 19-22 mm 8-15 mm 15-19 mm 19-22 mm	42.423 42.425 42.475 42.416 42.418 42.419
			right	8–15 mm 15–19 mm 19–22 mm	42.426 42.428 42.429

#### Please note:

The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.

\* Left hand fin (illustration shows left hand) / right hand fin. Left or right hand are determined by view from outside.




Product description			Glass thickness	Art. No.
PT 41 Comfort	with	left	8–12 mm	38.410
patch for overpanel and sidelight	pivot pin	right	8–12 mm	38.420
with pivot pin	with	left	8–15 mm	38.413
Ø 14 mm and fin fitting*. For use with toughened	stop insert	right	8-15 mm	38.423
safety glass (TSG).	with	left	8–15 mm	38.416
	blanking insert	right	8–15 mm	38.426

The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.

\* Left hand fin (illustration shows left hand) / right hand fin. Left or right hand are determined by view from outside.

#### **Connector patches**


#### Shown with 10 mm glass. When used with other glass thicknesses, the measurements change accordingly.

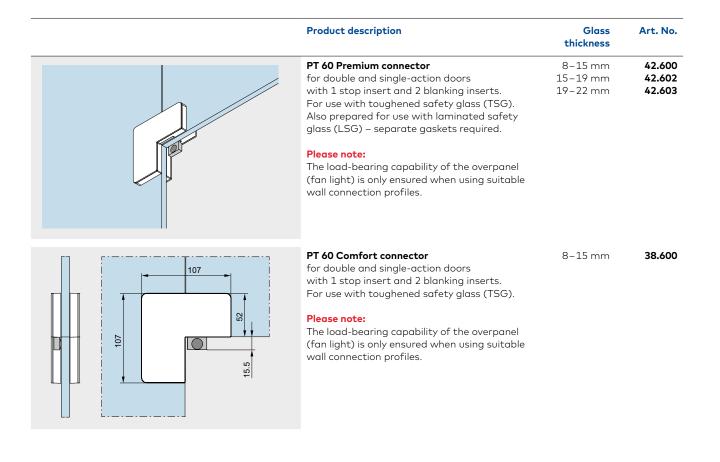

Product description	Glass thickness	Art. No.
<b>PT 70 Premium</b> overpanel connector with 2 stop inserts and 2 blanking inserts. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.	8–15 mm 15–19 mm 19–22 mm	42.700 42.702 42.703
<b>PT 70 Comfort</b> <b>overpanel connector</b> with 2 stop inserts and 2 blanking inserts. For use with toughened safety glass (TSG).	8-15 mm	38.700

#### Locks and strike boxes

#### Shown with 10 mm glass. When used with other glass thicknesses, the measurements change accordingly.

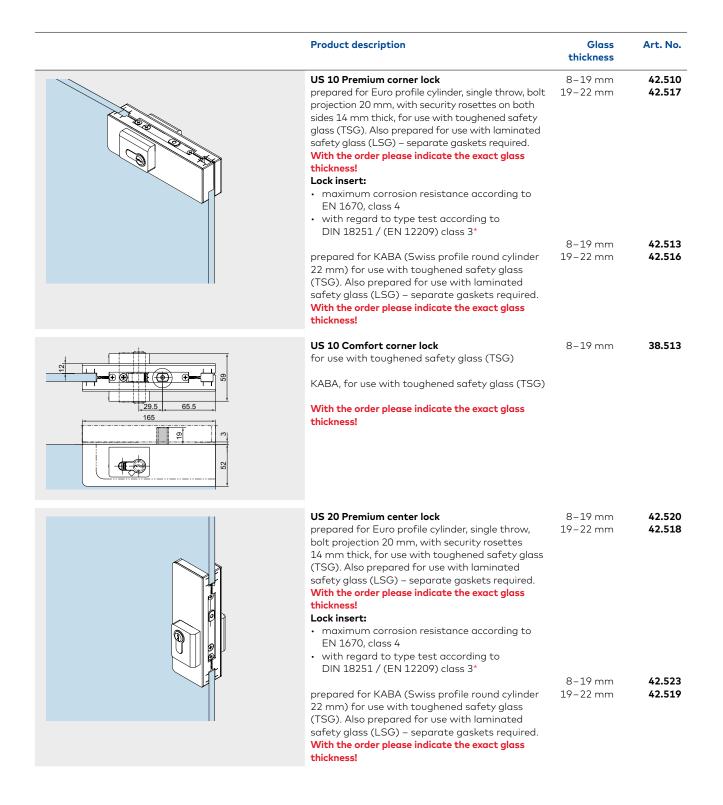


	Product description	Glass thickness	Art. No.
	<b>US 20 Comfort center lock</b> for use with toughened safety glass (TSG)	8–19 mm	38.520
	KABA, for use with toughened safety glass (TSG) With the order please indicate the exact glass thickness! * Extract from DIN 18251, class 3: Type-test with 50,000 locking bolt operating cycles. Furthermore the lock was tested successfully by a neutral testing institute with	8–19 mm	38.523
	100,000 locking bolt operating cycles. GK 30 Premium	8–15 mm	42.530
	single overpanel strike box with tapped hole at side. Suitable for corner lock US 10. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required. To install correctly, you will need to use either a	15–19 mm 19–22 mm	42.532 42.548
	screw-on fixing bracket, a wall anchor or a threaded rod fixing, see page 31.	0.13	28 520
	GK 30 Comfort single overpanel strike box with tapped hole at side. Suitable for corner lock US 10. For use with toughened safety glass (TSG). To install correctly, you will need to use either a screw-on fixing bracket, a wall anchor or a threaded rod fixing, see page 31.	8–12 mm	38.530
ARE AND	GK 20 Premium double overpanel strike box Suitable for corner lock US 10 consisting of two GK 30 with threaded connecting bolt. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required.	8–15 mm 15–19 mm 19–22 mm	42.526 42.528 42.529
	<b>GK 20 Comfort</b> <b>double overpanel strike box</b> Suitable for corner lock US 10 consisting of two GK 30 with threaded connecting bolt. For use with toughened safety glass (TSG).	8-12 mm	38.526

	Product description	Glass thickness	Art. No.
A REAL PROPERTY OF A REAL PROPER	GK 40 Premium corner overpanel strike box Suitable for corner lock US 10. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required. Please note: The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.	8–15 mm 15–19 mm 19–22 mm	42.540 42.542 42.547
	<b>GK 40 Premium</b> <b>corner overpanel strike box</b> Suitable for corner lock US 10. For use with toughened safety glass (TSG). <b>Please note:</b> The load-bearing capability of the overpanel (fan light) is only ensured when using suitable wall connection profiles.	8–12 mm	38.540
	GK 50 Premium strike box Suitable for center lock US 20. For use with toughened safety glass (TSG). Also prepared for use with laminated safety glass (LSG) – separate gaskets required. With the order please indicate the exact glass thickness!	8–19 mm 19–22 mm	42.550 42.553
	GK 50 Comfort strike box Suitable for center lock US 20. For use with toughened safety glass (TSG). With the order please indicate the exact glass thickness!	8–19 mm	38.550


### Installation details (in contrast to UNIVERSAL)

**Advisory:** Please note that the upper pivots for MUNDUS and those for UNIVERSAL are not mutually compatible. The spigot diameters of the MUNDUS fittings vary.

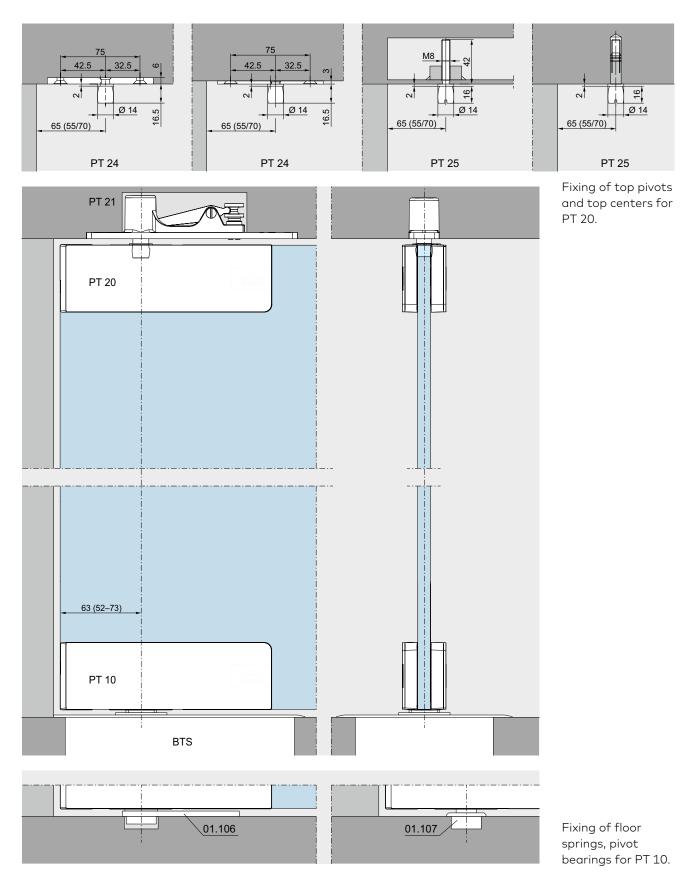


### Top bearing, pivots for MUNDUS

**Advisory:** Please note that the upper pivots for MUNDUS and those for UNIVERSAL are not mutually compatible. The spigot diameters of the MUNDUS fittings vary.

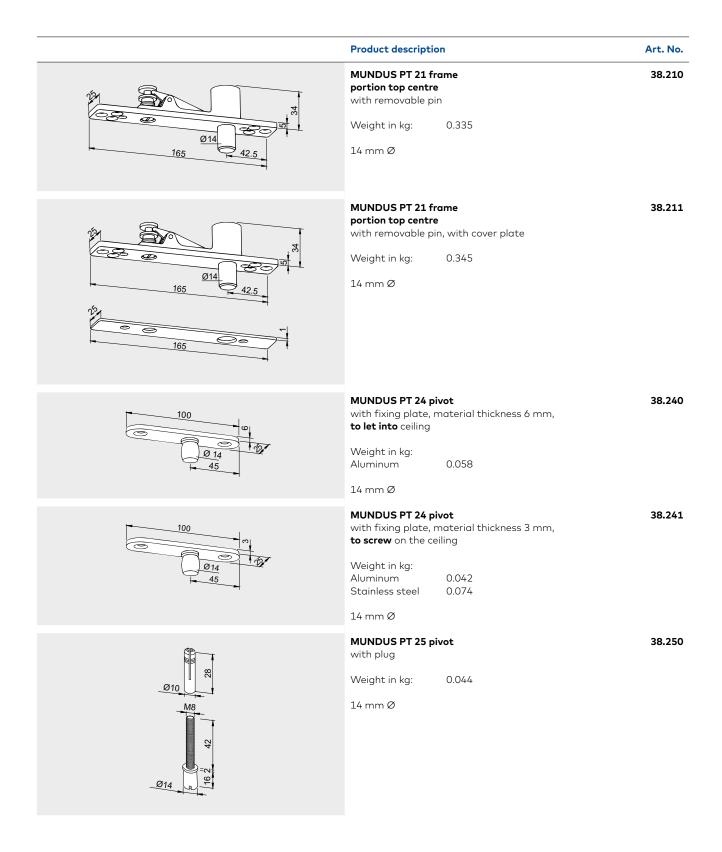


### Wall connection for MUNDUS

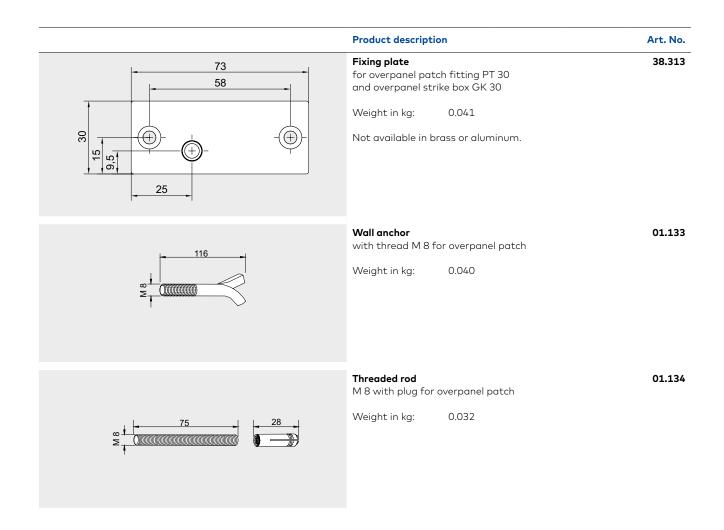


# Floor bearing, lock keeper plate, floor socket for MUNDUS


	Product description	Art. No.
92 0 14 F.F.L. 40 25 15	Floor pivot bearingwith round pivot 14 mm Ø, and cover plate; height adjustable by 5 mm max. door weight 100 kgWeight in kg: Aluminum0.155 Brass0.170 Stainless steel0.169	01.106
	Floor pivot bearing with round pivot 14 mm Ø and pin 24 mm Ø max. door weight 100 kg Weight in kg: 0.078	01.107
0KFF 36.5 27 9	Floor bearing with profile spindle (longer spindle on request), max. door weight 200 kg Stainless steel, max. door weight 200 kg Weight in kg: 0.254	04.602 04.603
94 Ø15.5 55 55	Lock keeper plate, stainless steel, two parts, adjustable ± 5 mm Weight in kg: 0.048	05.190
$ \begin{array}{c}                                     $	Floor socket, zinc coated brass for lock bolt         Weight in kg:       0.020         Floor socket, aluminum, with spring and plastic stopper, dirt protection         Weight in kg:       0.026         Eccentric socket, eccentric, zinc coated brass, with adjustable plastic socket insert	05.192 05.193 05.194
05.192 05.193 05.194	Weight in kg: 0.020	

### Accessories for use with laminated safety glass

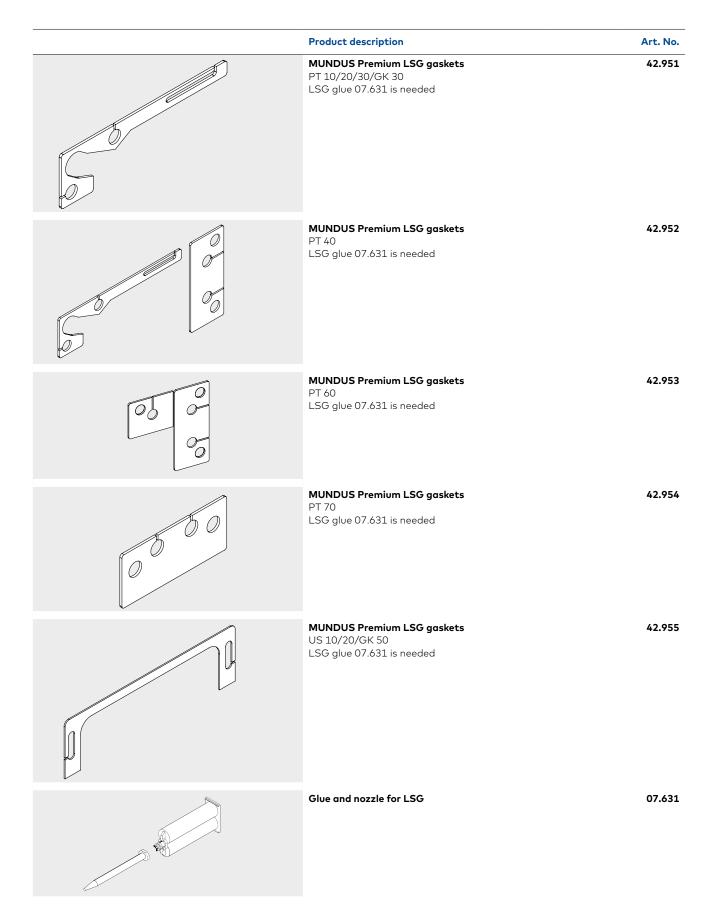

### **Glass preparation patch fittings**

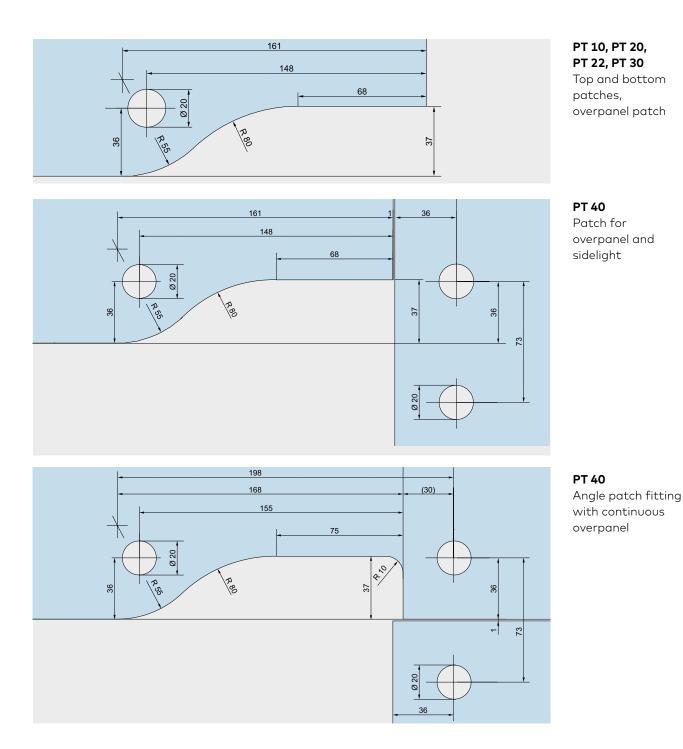

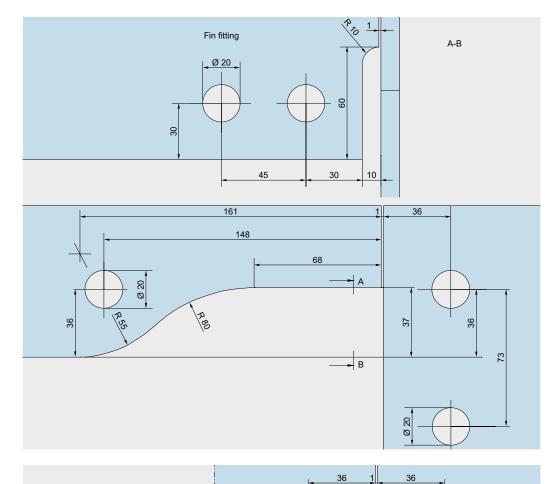




**PT 60** Connectors for overpanels and sidelights


36

73

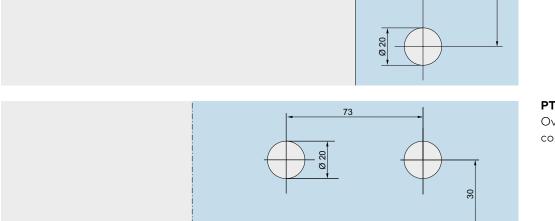


Ø 20




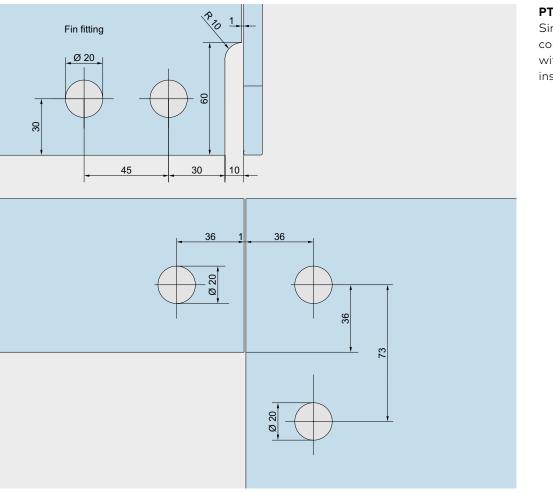



### Glass preparation locks and strike boxes

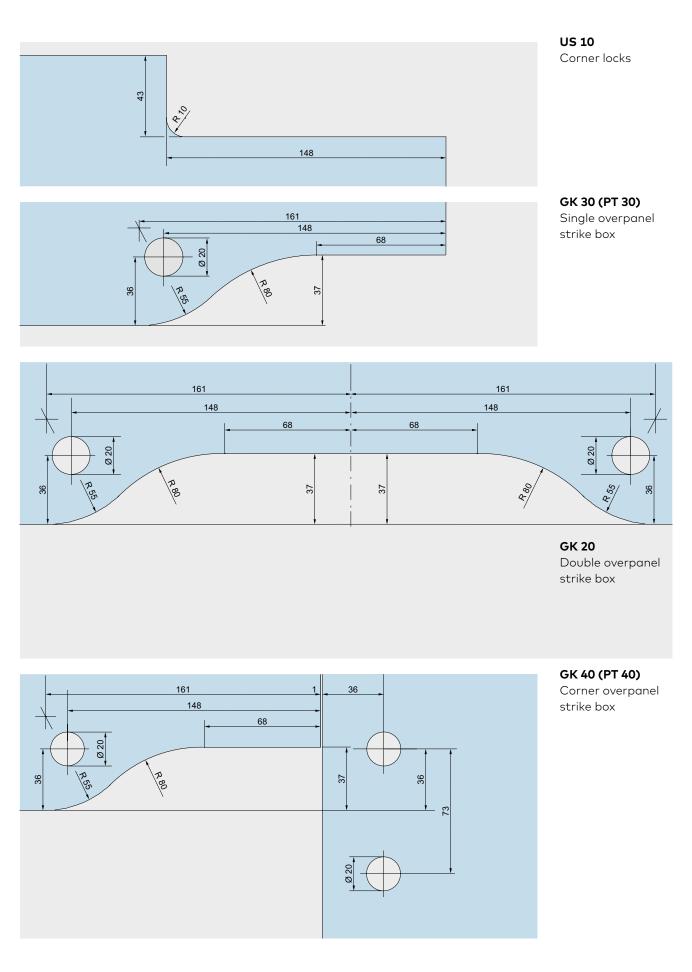

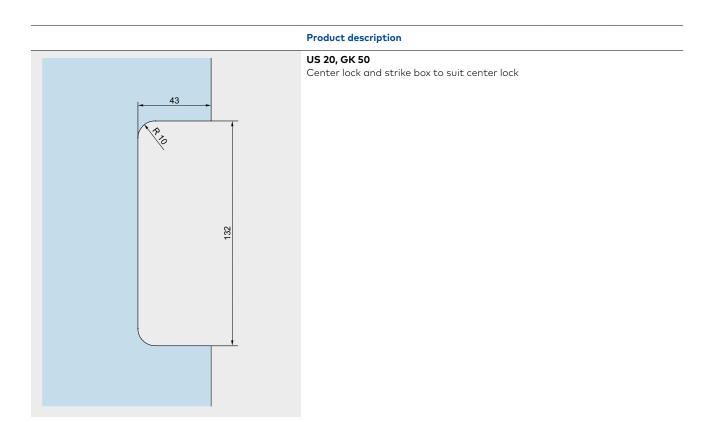

#### 38

### Space for your notes

# **Content** UNIVERSAL

42	General information
44	Type illustration
48	Components
60	Glass preparation
70	Installation details
188	Accessories
212	Safety-related information

# UNIVERSAL

### UNIVERSAL ... as the name says


With its broad spectrum of basic types and variants, the UNIVERSAL range of patch fittings enables the realisation in toughened glass of almost any conceivable design. Toughened glass assemblies can be provided with fixed parts in widely differing arrangements – with corner fittings or fin fittings at different angles, and with double or single-action doors in single-leaf or double-leaf designs.

#### Easy glass preparation, secure fixing

dormakaba has an intimate knowledge of the special properties of glass as a building material. This has led to the design of fittings requiring only minimal glass preparation – a quick and easy cut-out with additional holes. Carefully considered and positive measures have been taken to create the maximum clamping surface with optimum clamping efficiency.

#### Suitable for common glass thicknesses

UNIVERSAL fittings are supplied as standard with gasket to suit 10 mm glass (TSG). For 8 mm and 12 mm glass, correspondingly thicker and thinner gasket is available. Some patches are even designed to fit directely with different glass thicknesses.

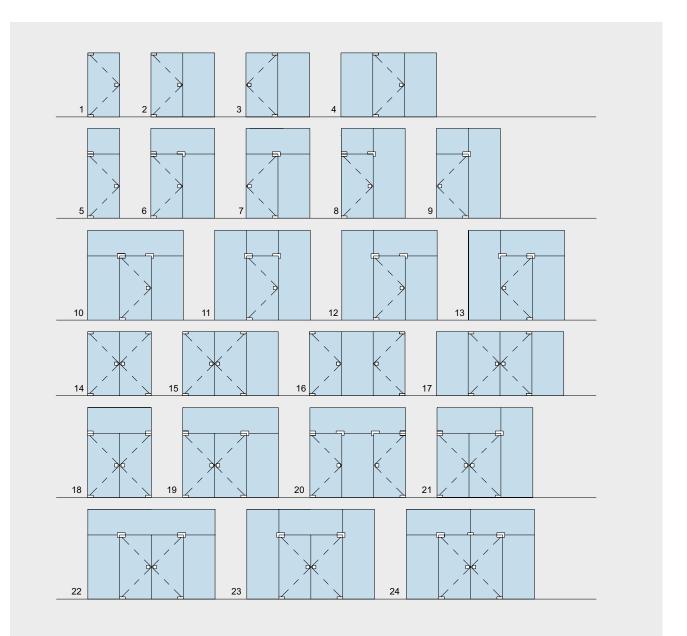

#### Variable pivot point

The inserts for corner and overpanel patches in the UNIVERSAL program have been designed and manufactured to give two options in the pivot point distance from the sidepanel or frame. It can be either 55 mm or 65 mm. At 65 mm pivot point and the use of a special round profile (page 124) doors can be built with a constant air gap of only 4 mm. For information regarding patch fittings UNIVERSAL with 15 mm pivot point for pinch free doors see page 62 and following pages.

#### Reliability built in

Quality materials and thorough workmanship mean that UNIVERSAL fittings have the features necessary to meet the most demanding of specifications. The fittings are designed to cope with large and heavy doors up to a maximum weight of 110 kgs: for instance, a door blade 3,000 mm high by 1,100 mm wide, using 12 mm glass is quite possible. Please contact our Application Engineering department for more information. For heavier and wider doors up to a maximum of 150 kg and max. 1,400 mm and for high frequented doors, rails with reinforced straps are available.

#### Matching range of locks


The UNIVERSAL range includes every type of accessory, and of course, a variety of locks and strike boxes in a matching design concept, giving the designer plenty of choice from the options available.

#### Short delivery times

All the common patterns and types are available exstock (factory). Specials will be prepared promptly.

### Type section

#### Toughened glass assemblies with fittings (55/65 mm pivot point) and locks. All standard assembly types see page 42.

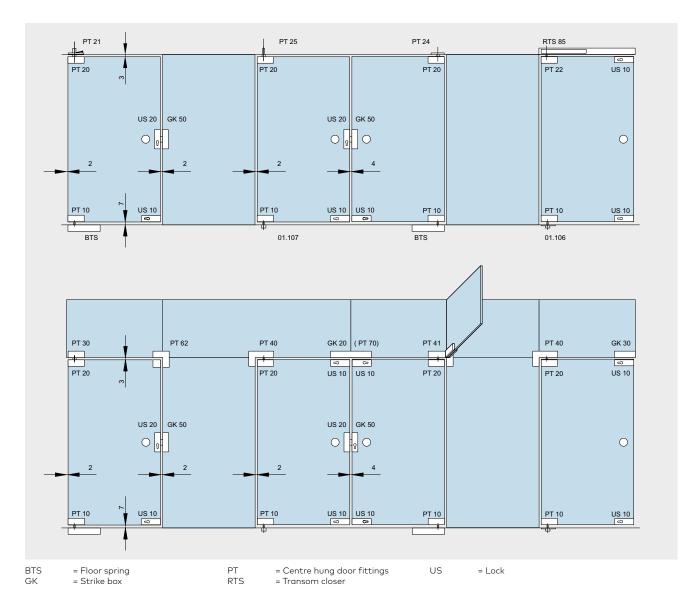

### Maximum door weight and width for UNIVERSAL fittings

max. door weight: 110 kg\* max. door width: 1,100 mm\*\* For doors with higher frequency and in public areas we would advice to use a door rail for doors above 110 kg and door width larger than 1,100 mm. For door weights up to 150 kg and widths up to 1,400 mm door rails should be used.

#### \* For door heights up to 2,500 mm

For doors with a height of more than 2,500 mm we have to keep additional conditions/limits:

Glass thickness >/= 10 mm

 + Usage of a handle bar with 3 connection points in minimum and a minimum height of 1/2 door height

#### \*\* Use of door closers:


Doors < / = 1,100 mm must be provided with door closers of type EN 3 (with or without backcheck), and doors > / = 1,100 mm need to be fitted with larger door closers (e.g. EN 4, 5 or 6) without backcheck.

#### Torque for fixing screws

Screws M 6: 10 Nm (4 mm)\* Screws M 6: 15 Nm (5 mm)\* Screws M 8: 20 Nm (5 mm)\* \*Allan key size

#### Please note: If angle fittings or fin fittings are used:

"Left" or "Right" have to be determined in any case by view from outside and above.



### UNIVERSAL Motion – the self-closing patch fitting

A patch fitting with hydraulic self-closing function is not just convenient but also efficient: The hydraulic technology proves its advantage without requiring a power supply and any visible mechanism. UNIVERSAL Motion is like a reliable employee with intrinsic values: the space-saving technology is integrated in the compact bottom patch fitting and does not require any additional installation space.

#### Eight reasons for the one.

- **Completely smart.** In UNIVERSAL Motion, the door closing function is integrated in a compact, well-shaped unit. A subtly functional design.
- **Almost invisible.** What looks like a patch fitting manages the closing of doors by itself. An additional floor spring is not required.
- **Clear savings.** Less effort and cost-efficient. You need only two fittings for the self-closing swing door: UNIVERSAL Motion and PT 20.
- **Comfortable function.** The door closes softly by itself. The hydraulic door movement is achieved simply in the fitting without extra installation, without power supply.
- **Simple installation.** UNIVERSAL Motion consists of very few parts. The glass door is clamped in the fitting. No prior changes to the floor are required.
- For the existing building. Retrofitting is clearly simpler than before. The floor need not be sawn nor milled beforehand.
- **Simple positioning.** The material and composition of the floor are not critical factors. You need to place only four vertical bores for the bottom pivot bearing.
- **Different surface finishes.** The dormakaba colour palette creates systematic diversity. The colour spectrum corresponds to the standard UNIVERSAL fittings. A custom-made colour scheme as per RAL is also possible. Simply matches the contemporary interior.



#### **Technical features:**

Glass thickness:	10 + 12 mm ESG
Door width:	von 650 mm bis 1000 mm*
Door height:	max. 3000 mm
Door weight:	max. 100 kg
Pivot point:	67 mm

The screw depth in the bottom of the supplied screws for the floor pivot bearing is 65 mm.

Available in the surface variants stainless steel and aluminium, as well as the product variants with 90 degree hold-open (Tolerance window: +/- 3 degrees) and without hold-open.

UNIVERSAL Motion is intended for indoor use. The fitting is not suitable for outdoor applications and for doors in high-frequency areas / public buildings.


UNIVERSAL Motion is tested by dormakaba according to DIN EN 1191:2013 for 300,000 test cycles.

#### **Technical notes:**

The 90-degree detection has a tolerance range of +/-3 degrees due to the manufacturing process.

Due to insufficient pressure equalisation within the rooms, the door can lose its zero position when closed, caused by pressure or suction loads. This is due to the environment or external influences and does not represent a product defect. All spring-supported and hydraulic closing devices are affected. The problem can only be mitigated or avoided by creating significantly larger and stronger floor springs (e.g. BTS 80) can be used (depending on the wind loads).

<sup>\*</sup> Door widths smaller than 650 mm can be realized from a product technical point of view. However, this is not recommended, as the opening forces to be applied then lie outside the DIN 12217 standard.

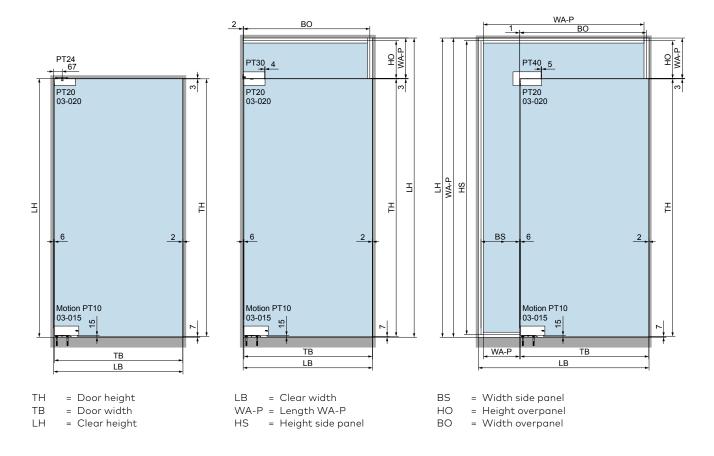

#### Hint:

To extend the tolerance range, it is possible to increase the glass bore for the PT20 from ø20 to ø22.



### **Patch fittings**

#### Shown with 10 mm glass. From 12 mm glass the measurements change accordingly. Accessories see page 188 and following.

Product description	Glass thickness	Art. No.
PT 10 UNIVERSAL         Bottom patch         with insert for floor spring spindle, or round pivot 14 mm Ø         With the order please indicate the exact glass thickness!         Weight in kg:         Aluminum       0.564         Brass       0.680         Stainless steel       0.662	10 mm 13 - 19 mm	*03.100 03.280
Floor pivot bearing for damp environments, with insert for PT 10 UNIVERSAL without floor recess, max. door weight 80 kg Weight in kg: 0.195 Only for UNIVERSAL applications, not suitable for MUNDUS.	10 mm	01.137
PT 20 UNIVERSAL Top patch with plastic socket for top pivot 15 mm Ø With the order please indicate the exact glass thickness! Weight in kg: Aluminum 0.477 Brass 0.593 Stainless steel 0.575	10 mm 13 - 19 mm	*03.110 03.281
PT 22 UNIVERSAL Top patch with insert for RTS transom closer Weight in kg: Aluminum 0.578 Brass 0.695 Stainless steel 0.677	10 mm	03.112

	Product description	Glass thickness	Art. No.
	PT 29 UNIVERSAL Top patch with pivot fixing plate, to countersink into ceiling (pivot point = 55 mm) max. door width: 1,000 mm max. door weight: 70 kg Weight in kg:	10 mm	03.114
	Aluminum 0.544 Brass 0.692		
-5 <u>1</u> -5 <u>1</u> 	<b>PT 30 UNIVERSAL</b> <b>Overpanel patch</b> with pivot 15 mm Ø, with M8 tapped hole at the side	10 mm 13 - 19 mm	*03.120 03.282
	With the order please indicate the exact glass thickness!Weight in kg: Aluminum0.528Brass0.654Stainless steel0.636		
	<b>PT 30 UNIVERSAL</b> <b>Overpanel patch</b> with stop insert	10 mm 13 - 19 mm	*03.420 03.482
To a local de la construcción de	With the order please indicate the exactglass thickness!Weight in kg:Aluminum0.528Brass0.654Stainless steel0.580		
164	PT 30 UNIVERSAL Overpanel patch with blank insert With the order please indicate the exact glass thickness!	10 mm 13 - 19 mm	*03.421 03.484 not illustrated
	Weight in kg: Aluminum 0.519 Brass 0.645 Stainless steel 0.571		

	Product description	Glass thickness	Art. No.
NS 0 8 0 0 0 8 0 0 0 8 0 0 0 0	Fixing plate for overpanel patch PT 30 UNIVERSAL Weight in kg: Aluminum 0.016 Brass 0.038 Stainless steel not available, satin chrome on brass supplied.		03.128
	Wall anchor with thread M 8 for overpanel patch PT 30 Weight in kg: 0.040		01.133
	<b>Threaded rod</b> M 8 with plug for overpanel patch PT 30 Weight in kg: 0.032		01.134
	PT 51 UNIVERSAL Double overpanel fitting with fin fitting on one side and 2 pins 15 mm diameter Usable for glass thicknesses up to 12 mm. If thicker glasses are required, please talk to our Application Engineering people. Weight in kg: Aluminum 1.299 Stainless steel 1.576	10 mm	03.160
	PT 40 UNIVERSAL         Patch for overpanel and sidelight         with pivot 15 mm Ø         With the order please indicate the exact         glass thickness!         Weight in kg:         Aluminum       0.755         Brass       0.958         Stainless steel       0.937	10 mm 13 - 19 mm	<b>*03.140</b> <b>03.283</b> not illustrated

	Product description	Glass thickness	Art. No.
	PT 40 UNIVERSAL         Patch for overpanel and sidelight         with stop insert         With the order please indicate the exact glass thickness!         Weight in kg:         Aluminum       0.755         Brass       0.958         Stainless steel       0.937	10 mm 13 - 19 mm	*03.440 03.483 not illustrated
	PT 40 UNIVERSAL         Patch for overpanel and sidelight         with blank insert         With the order please indicate the exact         glass thickness!         Weight in kg:         Aluminum       0.746         Brass       0.949         Stainless steel       0.928	10 mm 13 - 19 mm	<b>*03.441</b> <b>03.485</b> not illustrated
30 5 5 6 0 15 55/65	PT 41 UNIVERSAL         Patch for overpanel and sidelight         with fin fitting inside, with pivot 15 mm Ø         PT 41 UNIVERSAL         Patch for overpanels and sidelight         with stop insert         Weight in kg:         Aluminum       0.952         Stainless steel       1.197	10 mm 10 mm	**03.162/ 03.163 **03.262/ 03.263 not illustrated
	PT 41 UNIVERSAL Patch for overpanels and sidelight with fin fitting on both sides, with pivot 15 mm Ø Weight in kg: Aluminum 1.149 Stainless steel 1.457	10 mm	03.161

\* Suitable gaskets have to be used for systems with an 8 or 12 mm glass thickness. These are available on page 196.
\*\* Left hand fin (illustration shows left hand) / right hand fin. Left or right hand are determined by view from outside.

	Product description	Glass thickness	Art. No.
	<b>PT 42 UNIVERSAL</b> <b>Overpanel patch for single action doors</b> with angled connector inside, pivot 15 mm, angle 90°		**03.164/ 03.165
	PT 60/61 UNIVERSAL Connector for overpanel and sidelight, for double or single action doors with one stop insert and two blank inserts, also suitable for 12 mm glass thickness. With the order please indicate the exact glass thickness! Weight in kg:	10 mm 13 - 19 mm	*03.150 03.452 not illustrated
106	Aluminum 0.343 Brass 0.461 Stainless steel 0.436 PT 62 UNIVERSAL Connector		03.173
	for overpanel and sidelight, with stop Weight in kg: Aluminum 0.475 Stainless steel 0.670		
	PT 70 UNIVERSAL Overpanel connectorwith two stop inserts and two blank inserts, also suitable for 12 mm glass thicknessWith the order please indicate the exact glass thickness!Weight in kg: AluminumAluminum0.272 Stainless steel0.335	13 - 19 mm	<b>*01.150</b> <b>01.158</b> not illustrated
	<ul> <li>Suitable gaskets have to be used for systems wit These are available on page 196.</li> <li>Left hand fin (illustration shows left hand) / righ Left or right hand are determined by view from a</li> </ul>	t hand fin.	glass thickness.

Left or right hand are determined by view from outside.

 Product description	Glass thickness	Art. No.
<b>Overpanel-sidelight connector</b> Weight in kg: Aluminum 0.146		12.536
PT 71 UNIVERSAL Overpanel connector with fin fitting Weight in kg: Aluminum 0.458 Stainless steel 0.608		01.161
PT 80 UNIVERSAL ConnectorWith the order please indicate the exact glass thickness!Weight in kg: Aluminum0.555 Stainless steel0.780	13 - 19 mm	*03.170 03.472 not illustrated
PT 81 UNIVERSAL Connector with fin fittingWeight in kg: Aluminum0.784 Stainless steel1.065		03.175

	Product description	n	Glass thickness	Art. No.
	PT 80 UNIVERSAL Connector angle 90° Weight in kg: Aluminum Stainless steel	0.467 0.540		03.171
	PT 80 UNIVERSAL Connector, shortened, angle 90 Weight in kg: Aluminum Stainless steel	0.236 0.270		03.470
53	<b>PT 90 UNIVERSAL</b> Screw on fitting Weight in kg: Aluminum Brass Stainless steel	0.120 0.160 0.155	13.5–19 mm	07.021 07.210
28	<b>PT 91 UNIVERSAL</b> <b>Corner fitting</b> Weight in kg: Aluminum Brass Stainless steel	0.120 0.160 0.155	13.5–19 mm	07.023 07.211

Product description Glass Art. thickness	
PT 80 UNIVERSAL 03. Connector, angle 135° Weight in kg: Aluminum 0.472 Stainless steel 0.541	
Side connector       10, 12 mm       01.         with fixing plate       Also suitable for 8 mm glass thickness.       10, 12 mm       01.         Weight in kg:       Aluminum       0.313       10, 12 mm       01.         Stainless steel       0.376       0.376       01.       01.	92 × 60 0 22
Gasket     8 mm     01.       not illustro       Please indicate glass thickness and Art. No.     12 mm     01.       of fitting.	
Aluminum round profile       03.         for pinch free doors with       65 mm pivot point, consisting of 2 halves, prepared for UNIVERSAL fittings or door rails (76.5 mm or 100 mm).         Please indicate:       • Panel height (max. 2,500 mm, higher dimension on request)         • Required preparation of the profile for top and bottom fittings	
Aluminum round profile, 03. as above, stock lenght 6,000 mm (unprepared)	
Aluminum round profile, 03. as above, stock lenght 3,000 mm (unprepared)	
Aluminum round profile, 03. as above, stock lenght 2,800 mm (unprepared) Weight in kg/m:	
rails (76.5 mm or 100 mm). Please indicate: • Panel height (max. 2,500 mm, higher dimension on request) • Required preparation of the profile for top and bottom fittings Aluminum round profile, as above, stock lenght 6,000 mm (unprepared) Aluminum round profile, as above, stock lenght 3,000 mm (unprepared) Aluminum round profile, as above, stock lenght 2,800 mm	

### Locks, complete for 10 mm glass thickness

	US 10 UNIVERSAL corner lock, prepared for Europrofile cylinder, single throw, bolt projection 20 mm, with security rosettes on both sides, 14 mm thick. Lock insert: • high corrosion resistance according to EN 1670, class 4 • with regard to type-test according to DIN 18251, class 3** With the order please indicate the exact glass thickness! prepared for KABA For half profile cylinder Left hand top/ right hand bottom Left hand bottom/right hand top Weight in kg: Aluminum 0.942 Brass 1.061 Stainless steel 1.053	10 mm 13, 15, 19 mm	03.206 03.285 03.340 03.288 03.287
94 Ø15.5	Lock keeper plate, stainless steel, two parts, adjustable ± 5 mm Weight in kg: 0.048 Alternative (not illustrated): Floor sockets		05.190 05.192 05.193 05.194
	GK 30 UNIVERSAL Single overpanel strike box with threaded hole at side, to suit US 10 corner lock With the order please indicate the exact glass thickness! Weight in kg: Aluminum 0.418 Brass 0.555 Stainless steel 0.536 GK 30 UNIVERSAL with stop	13, 15, 19 mm	03.230 03.295 not illustrated *03.234/03.235 not illustrated
	Weight in kg: Aluminum 0.463 Stainless steel 0.597		

 Extract from DIN 18251, class 3: Type-test with 50,000 locking bolt operating cyc Furthermore the lock was tested successfully by a neutral testing institute with 100,000 locking bolt operating cycles.

Product description	Glass Art. No. thickness
GK 20 UNIVERSAL         Double overpanel         strike box to suit US 10 corner lock,         consisting of two GK 30 with threaded         connecting bolt         Weight in kg:         Aluminum       0.844         Brass       1.096         Stainless steel       0.948	03.245
GK 20 UNIVERSAL with stop         Weight in kg:         Aluminum       1.490         Brass       4.465         Weight in kg:         Aluminum       0.709         Brass       1.035         Stainless steel       1.010         Can be used for glass thickness of up to m         thicker glasses, please get in touch with o         ment beforehand.	
<b>GK 40 UNIVERSAL</b> <b>Corner overpanel strike box</b> to suit US 10 corner lock	03.250
GK 40 UNIVERSAL with stop Weight in kg: Aluminum 0.754 Brass 1.035 Stainless steel 1.010	*03.254/03.255 not illustrated
* Order of Art. No.: left hand fin / right hand fin	- determined by view from outside.


\* Order of Art. No.: left hand fin / right hand fin – determined by view from outside (Illustration shows left hand)


	Product description	Glass thickness	Art. No.
32	US 20 UNIVERSAL Centre lock, prepared for Europrofile cylinder, single throw, bolt projection 20 mm, with security rosettes 14 mm thick.	10 mm	03.215
15:	<ul> <li>Lock insert:</li> <li>high corrosion resistance according to EN 1670, class 4</li> <li>with regard to type-test according to DIN 18251, class 3**</li> </ul>		
	With the order please indicate the exact glass thickness!	13, 15, 19 mm	<b>03.286</b> not illustrated
<u>26</u> 51	Prepared for KABA		03.345
	Prepared for half profile cylinder		*03.290/03.289
	Weight in kg: Aluminum 0.942 Brass 1.061 Stainless steel 1.053		


Lett or right hand are determined by view from outside. (illustration shows left hand)
 \*\* Extract from DIN 18251, class 3: Type-test with 50,000 locking bolt operating cycles.
 Furthermore the lock was tested successfully by a neutral testing institute with 100,000 locking bolt operating cycles.


	Product description	Glass thickness	Art. No.
397	GK 50 UNIVERSAL Strike box to suit US 20 centre lock	10 mm	03.224
	With the order please indicate the exact glass thickness!	13, 15, 19 mm	03.296
164	Weight in kg:		
	Aluminum 0.602 Brass 0.730		
	Brass 0.730 Stainless steel 0.727		
51			

### **Glass preparation fittings**

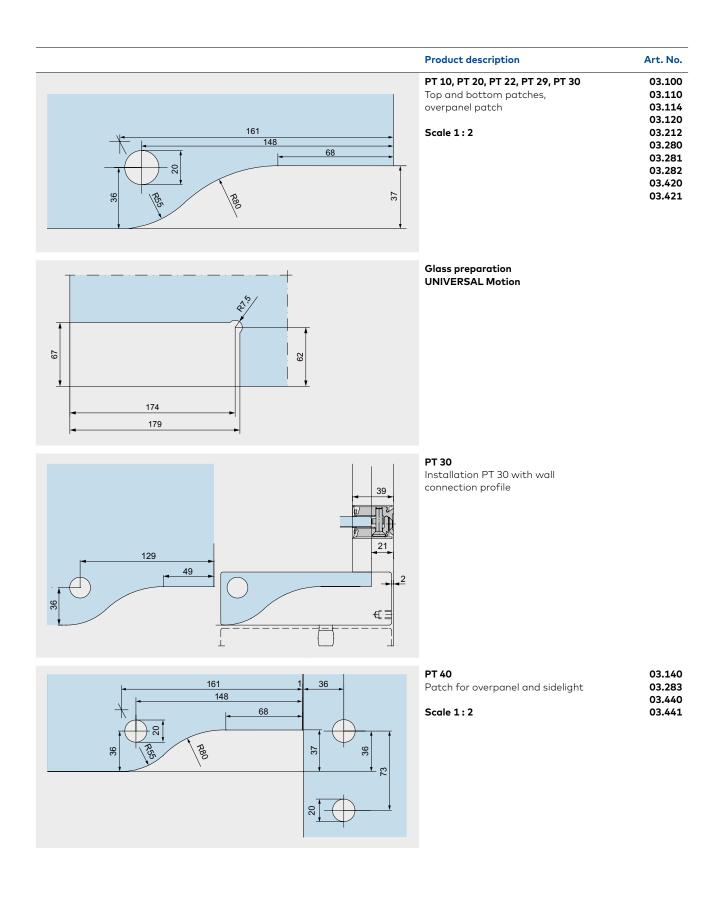

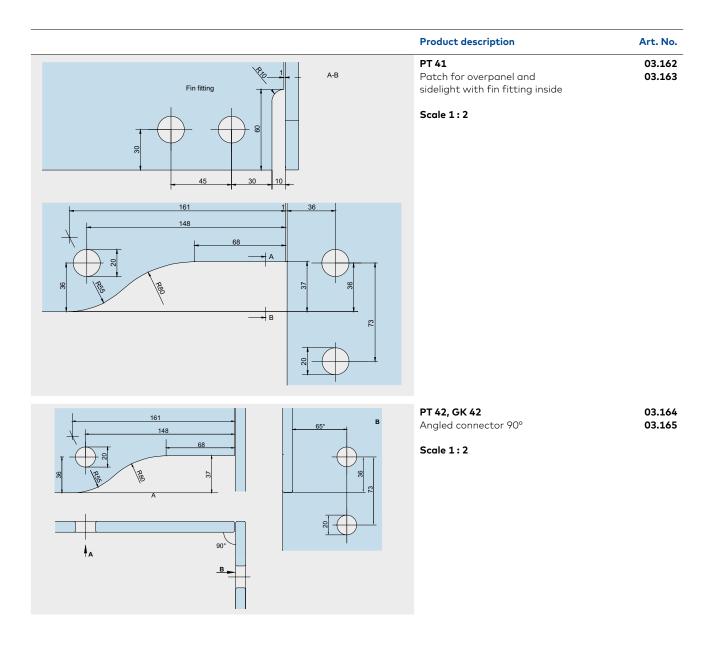

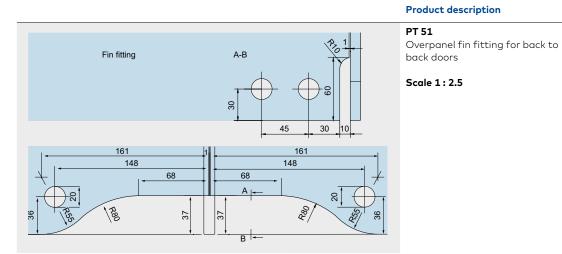




PT 60/61, PT 62 Winkelverbindung Connectors for overpanels and sidelights	03.150 03.173
Scale 1:2	
Glass preparation for fin fitting both sides see PT 81	03.452


Art. No.


03.160





PT 70	01.150
Overpanel connector	01.158


Scale 1:2

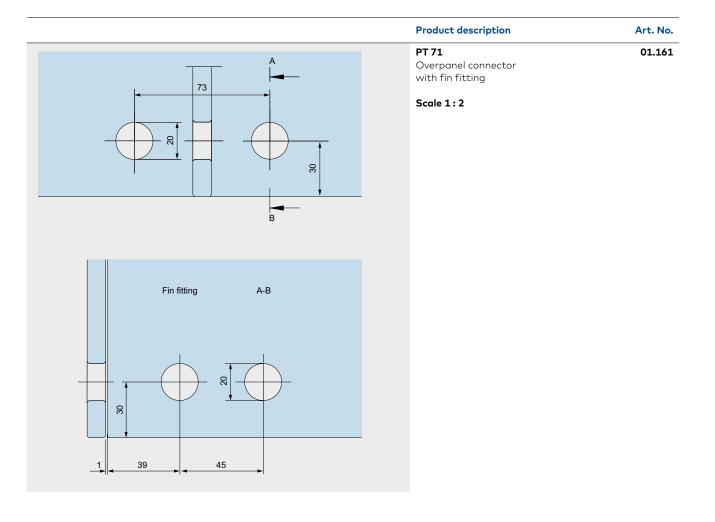

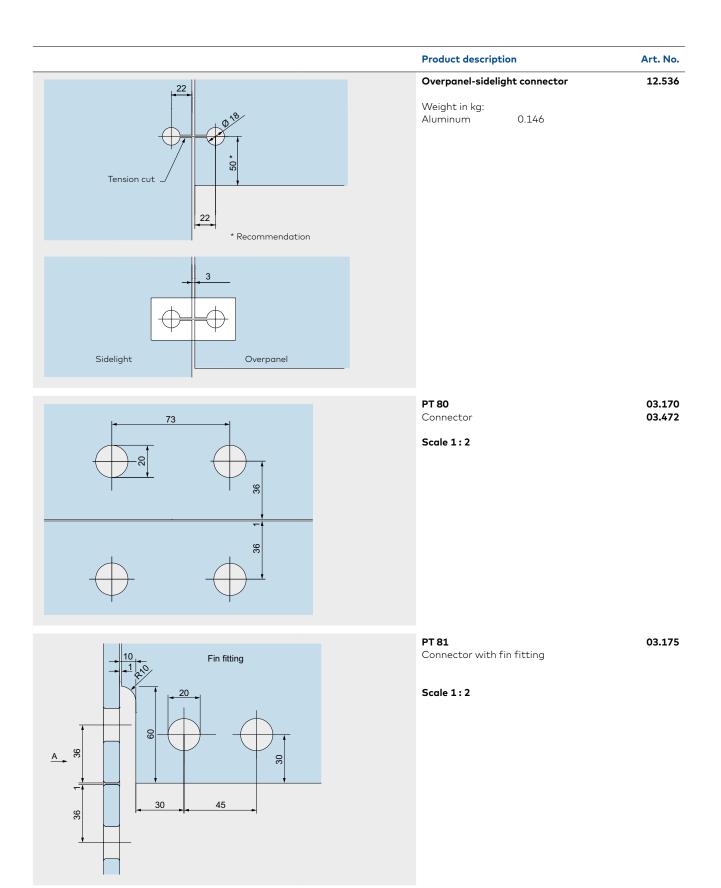

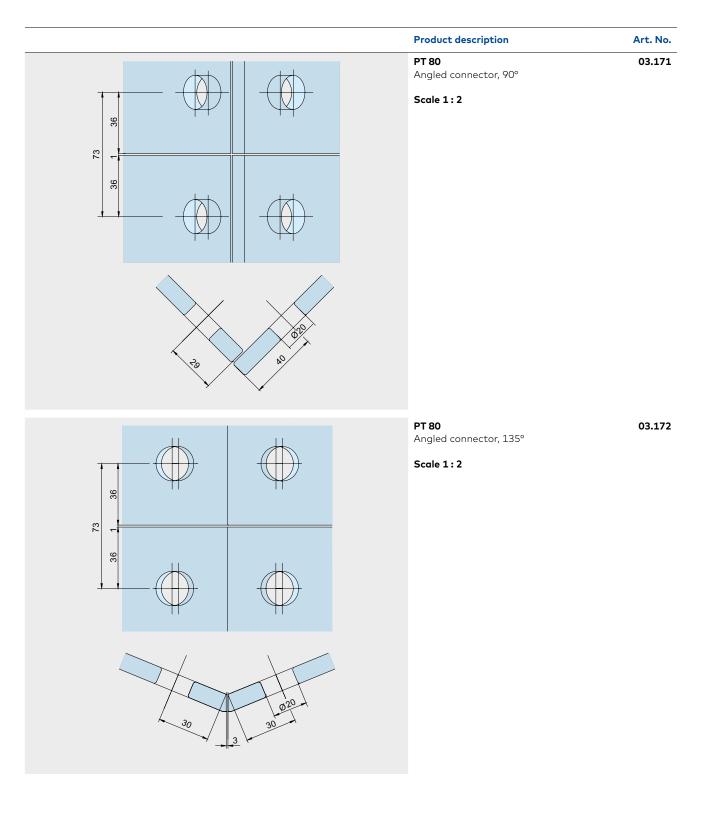

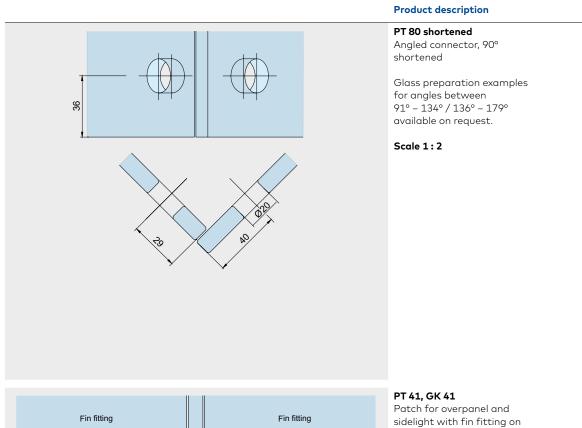

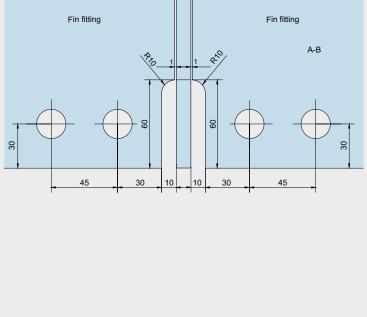


both sides

03.161


Art. No.


03.470

Scale 1:2

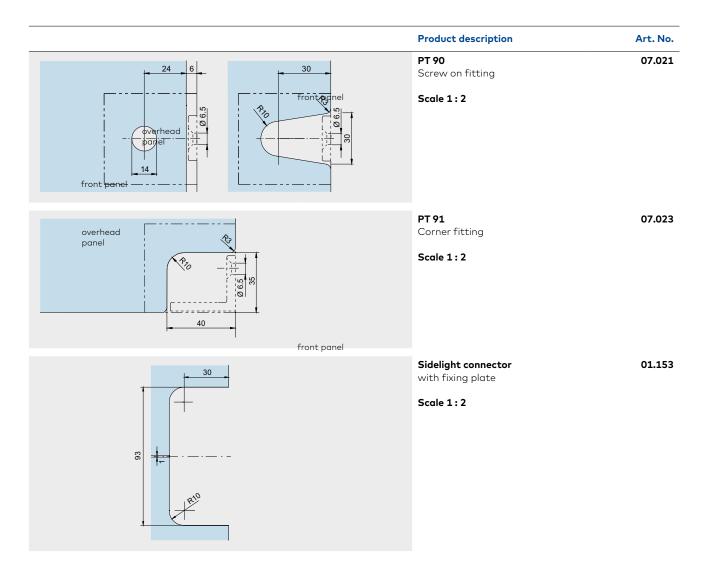


### **Glass preparation locks**

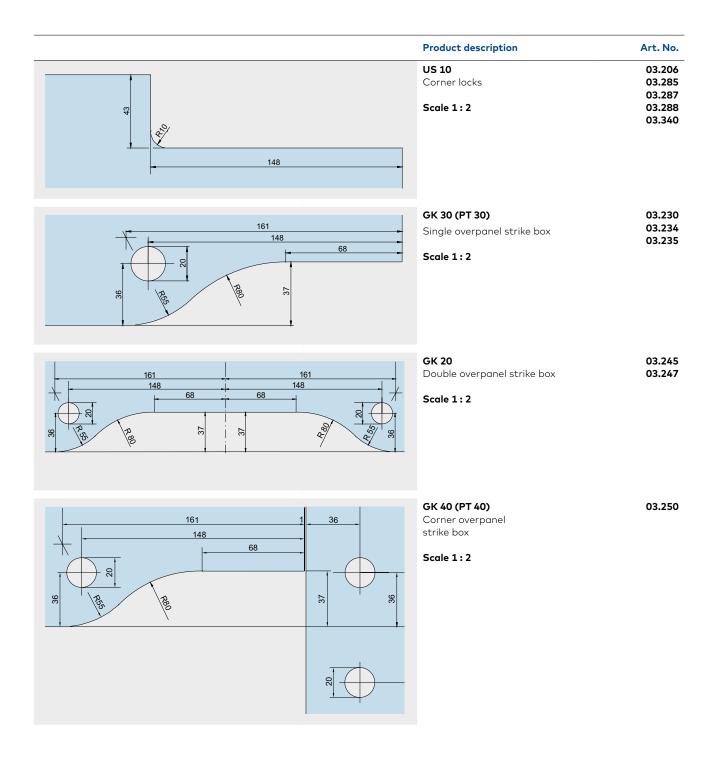

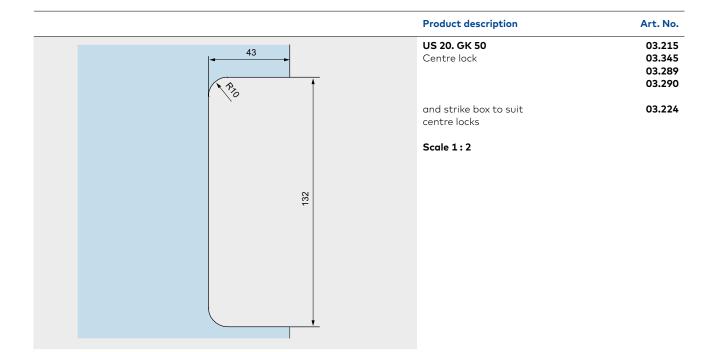

### Installation details

**Advisory:** Please note that the upper pivots for UNIVERSAL and those for MUNDUS are not mutually compatible. The spigot diameters of the MUNDUS fittings vary..

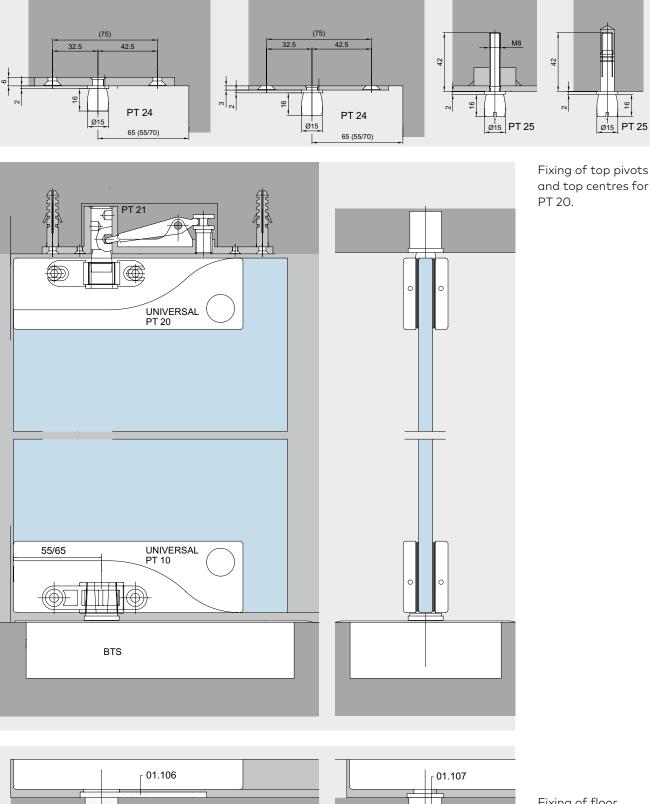

Fixing of floor springs, pivot bearings for PT 10.

### Space for your notes

## **Content** RP

74 General information
75 Type illustrations
76 Components
188 Accessories
212 Safety-related information




RP

## Marvellously concealed transom door closer

The RP pivot door system works with a tubular transom profile in which the RTS transom closer is integrated and concealed. The system is fixed on the ceiling using brackets which are concealed after system installation. A top patch fitting (UNIVERSAL PT 22) attaches the all-glass door to the closer. A bottom patch fitting (UNIVERSAL PT 10) connects the door to the floor pivot, which measures only a few centimetres. So glass thicknesses of 8 – 12 mm are feasible.

The UNIVERSAL patch fittings can be replaced by door rails top and bottom or MUNDUS patch fittings as a special option. When using MUNDUS Premium patch fittings, you also have the option of installing laminated safety glass (LSG). The RTS transom closer not only returns the door to the zero position each time it is opened, it also has a special dampening system to protect the door against unwanted impact caused by over-aggressive opening. In addition, the integral hold-open, which also comes as standard, enables the door to be held open at an angle of 90°.

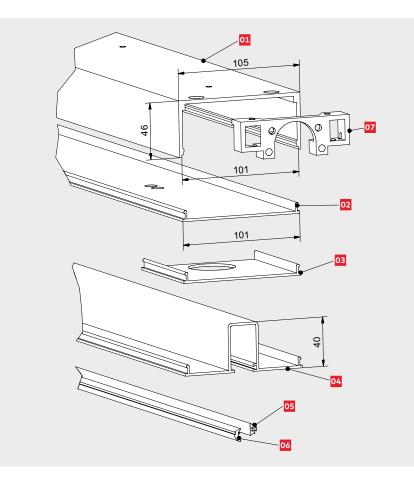

#### Transom tube configuration:

#### 01

Transom tube for fixing on ceiling, as lintel or similar, max. length 6,000 mm

#### 02

Cover profile for door, clip-on, max. length 6,000 mm

#### 03

Cover profile for fixed sidelights, clip-on type with glass groove

#### 04

Cover profile for fixed sidelights, clip-on, with glazing groove


#### 05/06


Contact profile / glass wedge profile, depending on combination for 8, 10 or 12 mm glass thicknesses of the sidelight

#### 07

Fixing bracket for securing transom tube and closer

### Type selection

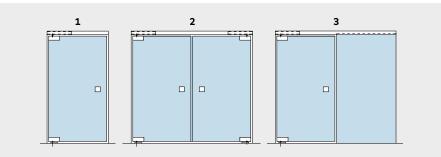

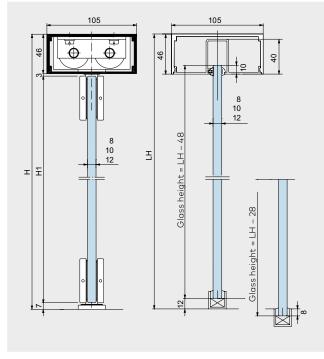

#### Options

- **1** Single leaf double-action door with transom tube
- 2 Pair of double-action doors with transom tube
- 3 Double-action door with through-running transom tube and fixed sidelight

Further versions up to 6000 mm are possible.

#### Materials and finishes

- Aluminum, silver EV1 anodized (similar Eloxal I EV1 / Eloxal II C 0) (101)
- Aluminum, similar satin stainless steel anodized (for profile material) (similar Eloxal II C 31) (113)
- Aluminum, traffic white powder coated (300)
- Aluminum special color anodized (199)
- Aluminum, special color powder coated (399)

#### Door panel dimensions

- Glass thicknesses:
   8 / 10 / 12 mm
- Door height H1: H 56 mm
- For max. door panel weights and widths please see the table below.

#### Sidelight dimensions


- Glass thickness:
   8 / 10 / 12 mm with
   two-part sealing profile
- Sidelight height:
   H 28 mm + floor pocket,
   where required

#### Also with door rails available

max. height	max. width	<b>max. door weight</b> (incl. fittings)	RTS version	
2,500	800-1,100	80 kg	RTS EN 3	
3,500	max. 1,250	110 kg	RTS EN 4	with door rails top and bottom see detail sheets 04-030 and 04-060

If you have any questions regarding special designs with door rails or MUNDUS patch fittings, our Application Engineering department will be glad to advise you.

# **Double-action system for glass doors**

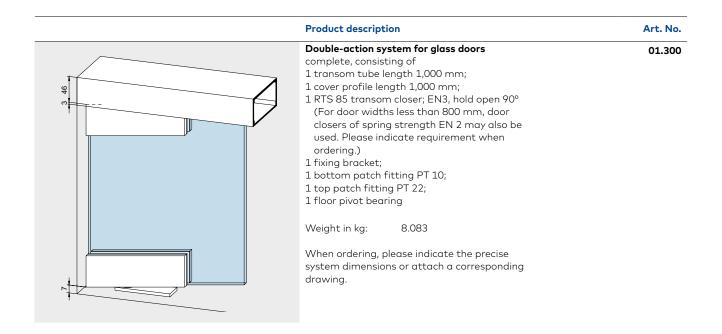

Product description	Art. No.
01 Transom tube for fixing at ceiling, as lintel, or similar,	
stock length 6,000 mm in fixed lengths	01.30 01.31
Weight in kg/m: Aluminum 1.620	
02 Cover profile for door area, clip-on	
stock length 6,000 mm in fixed lengths	01.302 01.305
Weight in kg/m: Aluminum 0.610	
03 Cover plate with cut-out for door closer spindle	
length 90 mm	01.303
Weight in kg: Aluminum 0.056	
04 Cover profile with glass grove to clip on Art.No. 01.301 / 311, to hold fixed sidelights inclusive	
05 / 06 Contact profile or glass wedge profile in 2 resp. 4 mm thicknesses, depending on combination for 8, 10 or 12 mm glass thickness of the sidelight	
stock length 6,000 mm in fixed lengths	01.304 01.314
Weight in kg: Aluminum 0.810	
07 Fixing bracket for securing transom tube and closer	01.30
Weight in kg: Aluminum 0.080	

RP

# **Content** BEYOND

80 General information
82 Type illustrations / sets
86 Components
86 Glass preparation
188 Accessories
212 Safety-related information



# BEYOND

## Systematic design

Safe, functional and extremely attractive, BEYOND, the unique system for glass doors without risk of pinched fingers with swing doors.

The development of BEYOND has been shaped by the search for a solution that combines a modern, attractive design with maximum safety and stability. In the swing-door system the pivot point is located directly at the glass edge, thus preventing the risk of trapped fingers often found at the secondary closing edges of glass swing. BEYOND opens up a huge range of opportunities for incorporating frameless glass doors into toughened glass assemblies and wall openings. The BEYOND system offers an elegant, sophisticated solution for swing doors in all situations, whether private or public, modern or traditional.

Developed with the practical requirements of the market in mind, this product offers a sensible alternative wherever security, safety and functiona-lity need to be complemented with an attractive design.





### Safe and secure

The patented BEYOND swing door system with its pivot point located centrally in the glass axis and close to the glass edge ensures safety and security. The alternative options of elegant, continuous pivot rod or smart short rod make the system suitable for any room situation. And with a choice of pull handles or lock/lever handle combinations, BEYOND enables the realisation of your design ideas.





The over panel pivot fitting – a slim connector.

An option for the bottom pivot point – short rod on a floor pivot.

If floor pivot bearings are being used, a separate lock or a tumbler is required.

### Short pivot rod

The BEYOND swing door system with short pivot rod offers maximum flexibility. No matter what the door dimensions, BEYOND short fittings provide a versatile solution.


dormakaba floor pivots, or – particularly for doubleaction doors – dormakaba BTS floor springs, form the ideal base for ensuring that the door always returns safely and securely to its home position. Since with the BTS floor spring the position of the pivot point requires it to be buried under the adjacent wall, the use of a glass side panel is recommended in this case. The top connection depends on the type of unit. When incorporating the glass door into a toughened glass assembly, the top connection is formed by an over panel pivot fitting; in the case of doors in wall openings, a top pivot bearing is fitted to the ceiling or in the lintel. Load transfer from the overpanel and side panel can be effected by means of wall adapter profiles.

Depending on customer requirements, BEYOND offers suitable fittings for 10 mm and 12 mm glass. Finishes for fittings and accessories: aluminum EV1-Deco anodized (114) or similar satin stainless steel anodized (107).

For maximum values please see the typical assemblies.

#### Note:

Overpanel fitting wall connector max. 1,200 mm door width; overpanel fitting glass connector max. 1,000 mm door width.

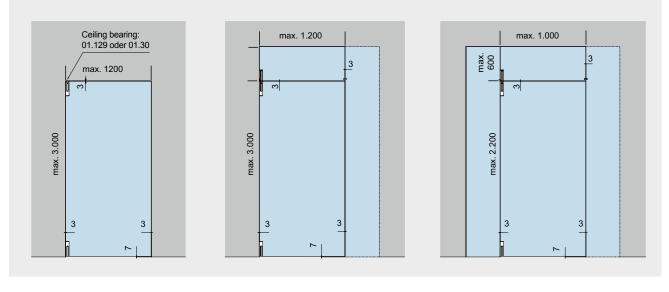

**Basic set for individual door.** For installation in masonry. Optionally with side panel on closing side.


Max door height 3,000 mm Max door weight 80 kg **Basic set and over panel fitting wall connector for door with over panel.** Optionally with side panel on closing side.

Max door height 3,000 mm Max door weight 80 kg Basic set and over panel fitting wall connector for door with over panel and side panel on pivot point side. Optionally with side panel on closing side.

Max door height 2,200 mm Max door weight 80 kg

#### **Combination BEYOND and BTS**

(door closer available from Door Control Division) With the BTS floor spring, the position of the pivot point means that the unit has to be buried under the adjacent wall, or that the glass side screen has to be appropriately machined (see adjacent detail). The height of the recess cut into the glass will need to be adapted to the installation situation and the means by which the side screen is fixed.

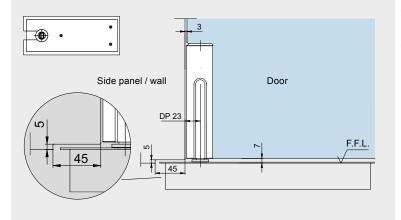

# Fittings and glass connector

 	Product description	Glass thickness	Art. No.
44 010 040	<ul> <li>BEYOND basic set: Pivoting fitting set, short type, comprising</li> <li>1 top pivot fitting with pivot Ø 15 mm,</li> <li>1 bottom pivot fitting with insert for floor spring spindle (90° turnable, e. g. BTS 80) or round pivot</li> </ul>	10 mm 12 mm	30.100 30.101
44 040			
	<b>BEYOND overpanel fitting,</b> wall connector, with plastic socket for top pivot	10 mm 12 mm	30.120 30.121
	<b>BEYOND overpanel fitting,</b> glass connector, with plastic socket for top pivot	10 mm 12 mm	30.130 30.131
	<b>BEYOND glass connector,</b> plastic, black, for connection of side panel at closing side	10 mm and 12 mm	30.320

### Continuous pivot rod

The BEYOND swing door system with continuous rod offers complete freedom from the risk of trapped fingers. By locating the pivot point of the swing door right at the glass edge and providing a round profile, the nip hazard is reduced to zero.

For the floor mounting of single-action, and particularly double-action doors, the dormakaba BTS floor spring offers a convenient alternative to the dormakaba floor pivot. Since with the BTS floor spring the position of the pivot point requires it to be buried under the adjacent wall, the use of a glass side panel is recommended in this case. As with the short-rod model, the top connection depends on the type of unit. Toughened glass assemblies are fitted with an over panel pivot fitting, whereas with doors in wall openings a top pivot bearing with ceiling fixing is used. Load transfer from the over panel and side panel can be effected by means of wall adapter profiles. In the case of heights over 2,200 mm, an anti-vibration device located midway along the pivot rod ensures quiet door operation.


Depending on customer requirements, BEYOND offers suitable fittings for 10 mm and 12 mm glass.

Finishes for fittings and accessories: aluminum EV1-Deco anodized (compatible with finish 150) (114) or similar satin stainless steel anodized (107).

For maximum values please see the typical assemblies.

#### Note:

Overpanel fitting wall connector max. 1,200 mm door width; overpanel fitting glass connector max. 1,000 mm door width.

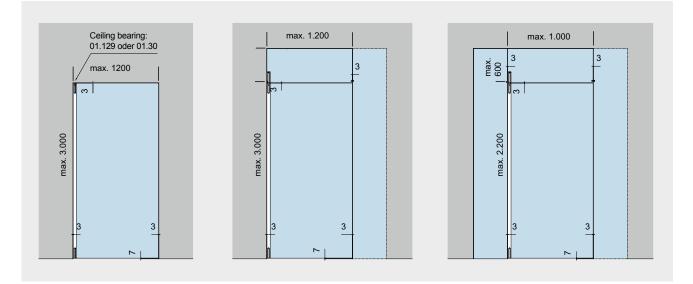


### Basic fitting for individual door.

For installation in masonry.

Max door height 3,000 mm Max. door weight 80 kg **Basic fitting and over panel fitting wall connector for door with over panel.** Optionally with side panel on closing side.

Max door height 3,000 mm Max. door weight 80 kg

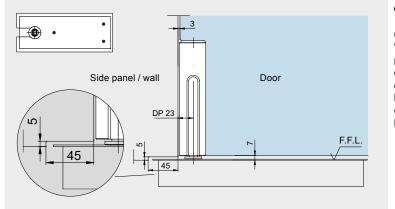

Basic fitting and over panel fitting wall connector for door with over panel and side panel on pivot point side.

Optionally with side panel on closing side. Max door height 2,200 mm Max. door weight 80 kg


#### Combination BEYOND and BTS


(door closer available from Door Control Division) With the BTS floor spring, the position of the pivot point means that the unit has to be buried under the adjacent wall, or that the glass side screen has to be appropriately machined (see adjacent detail). The height of the recess cut into the glass will need to be adapted to the installation situation and the means by which the side screen is fixed.

# Fittings and glass connector

	Product description	Glass thickness	Art. No.
4 6 64 6 612 6 612	BEYOND basic fitting: Pivoting fitting, long type, with pivot Ø 15 mm at top and insert for floor spring spindle (90° turnable, e. g. BTS 80) or round pivot at bottom Please indicate exact door height = glass measurement with order.	10 mm 12 mm	30.110 30.111
70 130 130 130 130 128 128 128 128 128 128 128 128	<b>BEYOND overpanel fitting,</b> <b>wall connector,</b> with plastic socket for top pivot	10 mm 12 mm	30.120 30.121
44 2010	<b>BEYOND overpanel fitting,</b> glass connector, with plastic socket for top pivot	10 mm 12 mm	30.130 30.131
30 30 30 30	<b>BEYOND glass connector,</b> plastic, black, for connection of side panel at closing side	10 mm and 12 mm	30.320
36 1012 1012	<b>BEYOND</b> anti-vibration device for pivot fitting, long	10 mm 12 mm	30.034 30.035

# **Glass preparation**

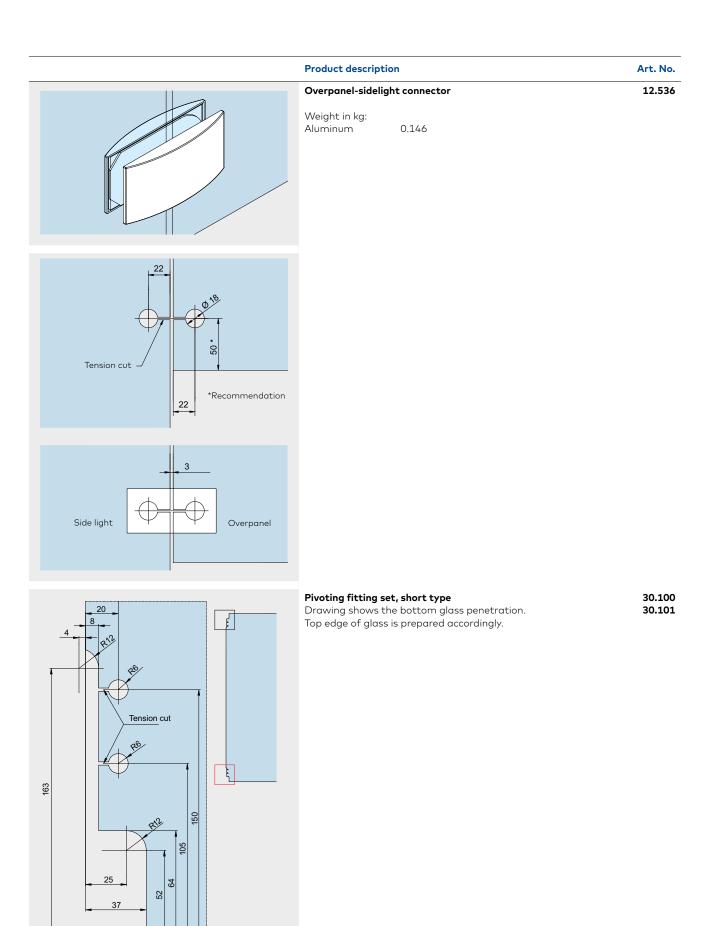

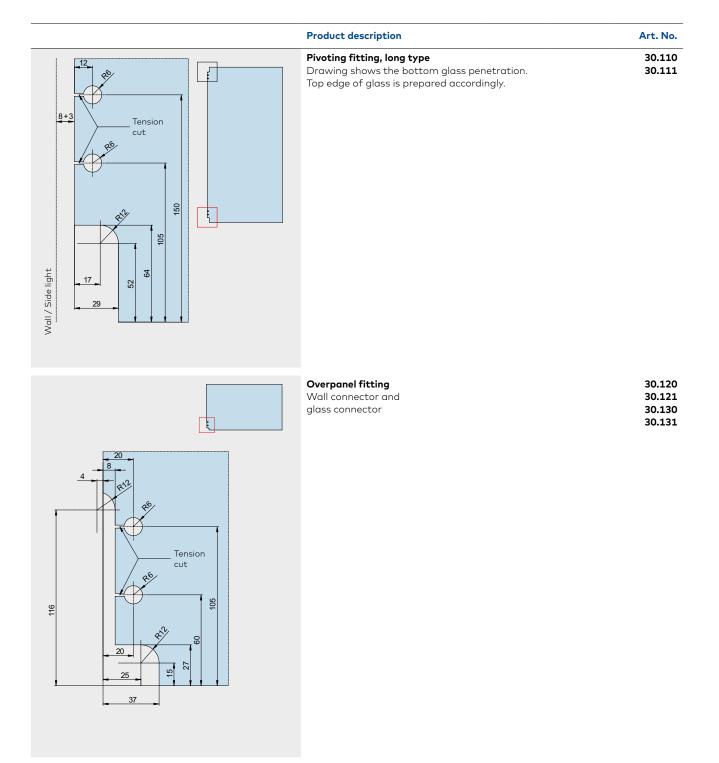



90 General information
91 Type illustrations
92 Components
100 Glass preparation
188 Accessories
212 Safety-related information



# The expansive range with slimline bodies for offset hung doors

EA patch fittings are characterized by their slim, neat shape and skilful hinge design. This comprehensive range of fittings allows the transparent elegance of single-action doors to reach their full potential – whether hung in frames or integrated in toughened glass assemblies.

#### Easy glass preparation secure fixing

dormakaba has an intimate knowledge of the special properties of glass as a building material. This has led to the design of fittings requiring only minimal glass preparation – a quick and easy cut out with additional holes. Carefully considered and positive measures have been taken to create the maximum clamping surface with optimum clamping efficiency.

#### Suitable for 10, 12 and 8 mm glass thicknesses

dormakaba EA patch fittings are available for 10 and 12 mm glass thicknesses. With additional gaskets these fittings can also be used for 8 mm glass.

#### **Reliability built in**

Quality materials and thorough workmanship mean that EA patch fittings have the features necessary to meet the most demanding of specifications.

#### Matching range of locks

The EA range includes a variety of locks and strike boxes in a matching design concept, giving the designer plenty of choice from the options available.

#### Virtually unlimited choice of colours and finishes

EA corner patches are available in the following finishes


- Aluminum, silver EV1 anodized (similar Eloxal I EV1 / Eloxal II C 0) (101)
- Aluminum, similar satin stainless steel anodized (107)
- Aluminum special color anodized (199)
- Aluminum, special color powder coated (399)


#### Short delivery times


All standard articles as per price list are available ex-stock (factory). Specials will be prepared promptly.




## Offset hung doors in rebated frames and toughened glass assemblies









#### Offset hung doors in rebated frames

max. door weight: 90 kg max. door width: 1,000 mm, using a bottom door rail: 1,100 mm

EA patch fittings for offset hung doors in rebated frames are supplied as standard prepared for 24 mm rebate depth. They can be prepared to suit rebate depths from 15 – 23 mm, and from 25 – 40 mm. Please specify rebate depth with order.

max. door weight for 25–40 mm rebate depth: 80 kg max. door width for 25–40 mm rebate depth: 900 mm For doors with max. weight of 80 kg and max. width of 1,000 mm use door rails.

The top centre frame portions are prepared to suit wood and steel frames. For aluminum frames, please enquire, giving details of aluminum system.

FT = rebate depth

#### Offset hung doors in toughened glass assemblies

max. door weight: 100 kg max. door width: 1,100 mm

For door weights up to 100 kg and widths up to 1,200 mm, door rails should be used.

EA patch fittings for offset hung doors in toughened glass assemblies have a 36 mm offset (= 43 mm from pivot point to glass surface).

#### Gap required between leaves on pairs of doors

Individual leaf width in mm	X = gap required in mm
400-600	8
600-1,000	6

#### Torque for fixing screws

Screws M 8: 12 Nm

# Patch fittings for offset hung doors in rebated frames with 24 mm rebate depth

For 10 mm glass thickness (42 mm offset = 49 mm from pivot point to glass surface), complete. For 12 mm glass thickness (40 mm offset = 47 mm from pivot point to glass surface), complete. Accessories see page 188.

Product description	Glass thickness	Art. No.
Bottom patch fittingto suit floor spring spindle, orround pivot 14 mm Ø count-er-plate reduced by 15 mm togive free glass edge at sideWeight in kg:Aluminum0.747	10 mm 12 mm	*02.102/02.103
Bottom patch fitting to suit floor spring spindle, or round pivot 14 mm Ø count- er-plate reduced by 15 mm to give free glass edge at side and bottom Weight in kg: Aluminum 0.715	10 mm 12 mm	*02.104/02.105
Top patch fittingcounter-plate reduced by15 mm to give free glass edgeat sideWeight in kg:Aluminum0.680	10 mm 12 mm	*02.112/02.113
<b>Top patch fitting</b> counter-plate reduced by 15 mm to give free glass edge at side and top Weight in kg: Aluminum 0.644	10 mm 12 mm	*02.114/02.115

\*Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

Product description	Glass thickness	Art. No.
Overpanel patch fitting counter-plate reduced by 15 mm to give free glass edge at side, bushing outside 	10 mm 12 mm	*02.122/02.123
Top patch fittingcomplete with pivot for framefixing, counter-plate reducedby 15 mm to give free glassedge at sideWeight in kg:Aluminum0.915	10 mm 12 mm	*02.206/02.207


\*Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

Components


# Patch fittings for offset hung doors in rebated frames with individual frame stop depth

#### Please specify rebate depth with order.

Rebate depth X = distance between outer surface of frame and rebate/stop (15 to 23 resp. 25 to 40 mm). Offset = rebate depth + 18 mm (33 to 41 resp. 43 to 58 mm). Complete, for 10 mm glass thickness. Accessories see page 188.

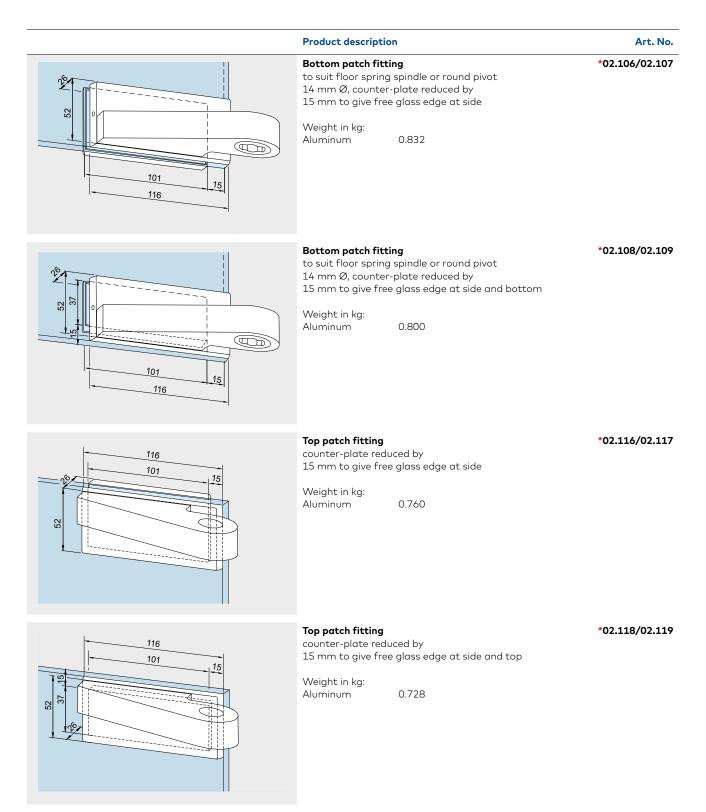

 $^{*}$  Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

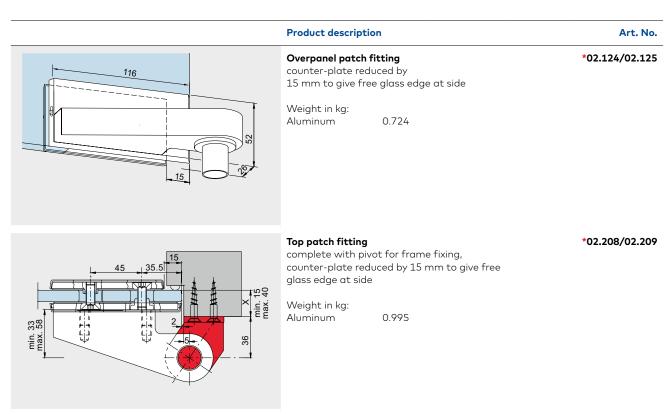


\*Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

Components

# Patch fittings for offset hung doors in toughened glass assemblies

#### (36 mm offset = 43 mm from pivot point to glass surface), complete, for 10 and 12 mm glass thickness.

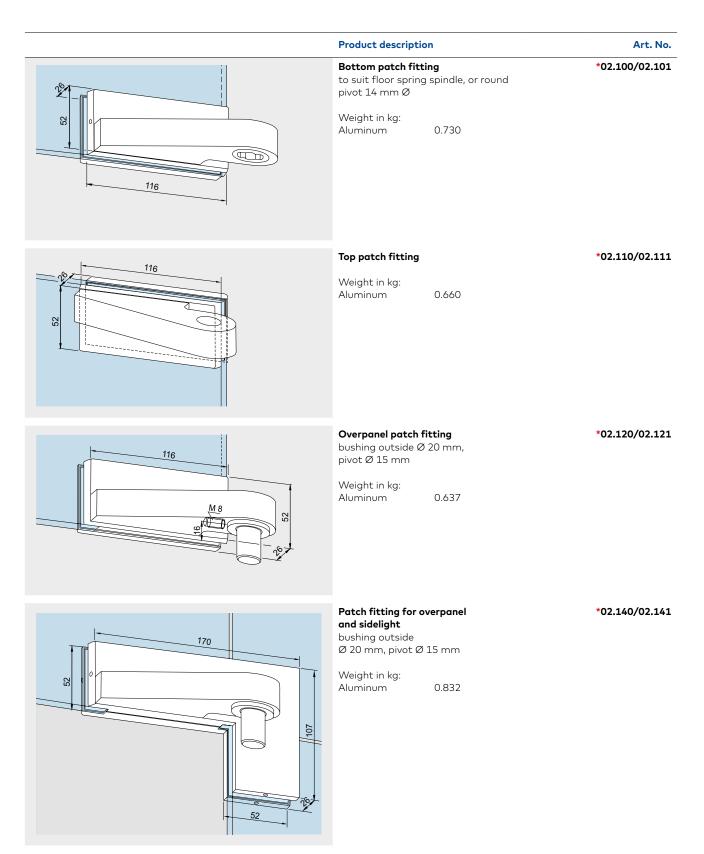


\*Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

Art. No.


\*02.200/02.201

#### 35.5 47.5 45 45 叡 111



 $\tau_{17}$ 

5




#### Product description

#### Top patch fitting complete with pivot for sidelight

Weight in kg:

Aluminum 1.415

30



Top patch fitting complete with pivot for wall fixing


Weight in kg: Aluminum 1.277




Top patch fitting complete with pivot for frame fixing

0.895


\*02.204/02.205





Weight in kg:


Aluminum



\*Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)

\*02.202/02.203


# Top centres for wood and steel frames





Frame top centre with fixing block			02.150
Weight in kg: Aluminum	0.471		

(If corner fittings / door rails are combined with frame top centres as described, please indcate rebate depth with order.)

Product description









Frame top centre with angle bracket

Weight in kg: Aluminum 0.453 Art. No.




Components

ΕA

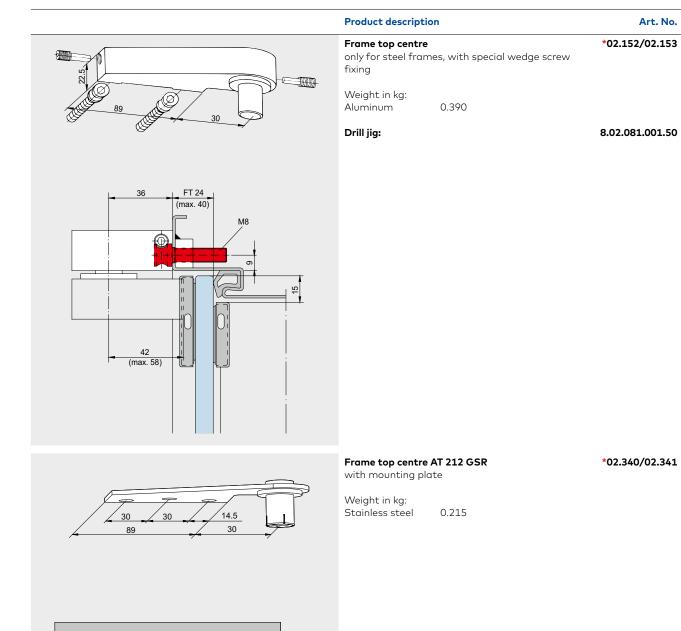


\*Order of Art.No.: Left hand / right hand – determined by view from hanging side. (Illustration shows right hand)



12/18

# **Glass preparation**

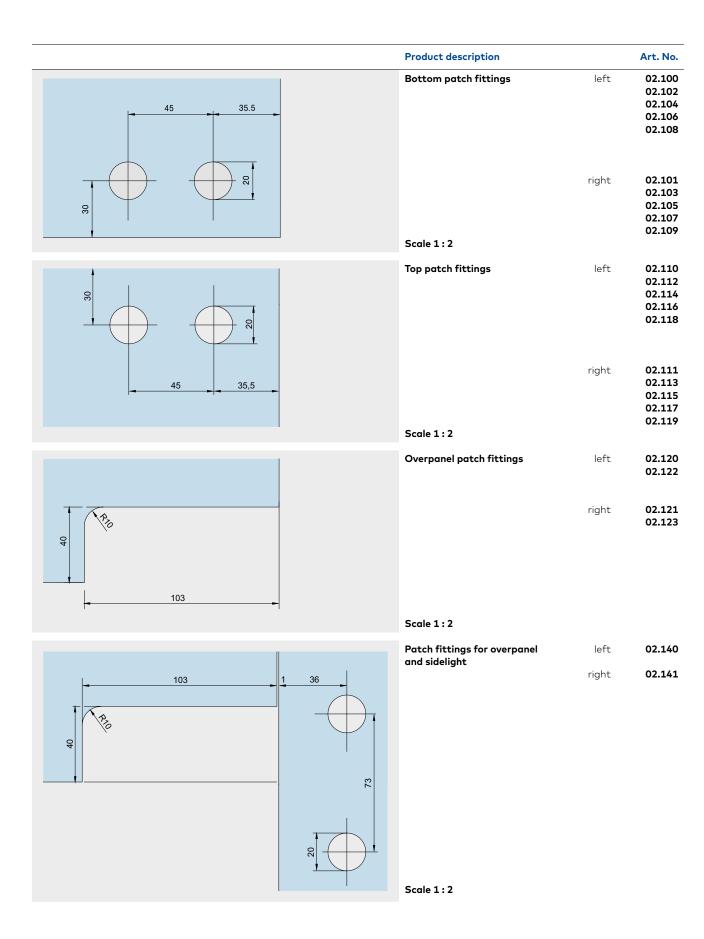

# Space for your notes

# **Content** TP/TA

104 General information
105 Type illustrations
108 Components
188 Accessories
212 Safety-related information



# TP/TA

# TP/TA – door rails which leave nothing to be desired

TP / TA door and side panel rail coordinate in design, dimensions and finishes with all dormakaba patch fittings. This creates the opportunity to specify fittings for the assembly wich provide maximum protection and effective sealing of the lower glass edges. The provision of door rails allows the installation of exteremely heavy-duty and wide doors.

#### Tamper resistant, with integral locks

The robust base rails are screwed together from alternate sides of the door at 150 mm centres. This makes unauthorised removal of the rail virtually impossible. All door rails are available with integral locks, prepared for profile cylinders and with security rosettes, or prepared for certain lever locks.

#### Special security- and quality characteristics

The particular feature of the locks with bottom or top locking bolt is a special corrosion and abrasion resistant bolt with integrated safety roll pin (hardened). By this the locks comply to DIN 18251, class 3 (according to type testing\*) and the highest corrosion resistance according to EN 1670, class 4 is achieved. Furthermore the lock was tested successfully by a neutral testing institute with 500,000 latch and 100,000 locking bolt operating cycles.

#### Easy door adjustment - especially whilst hanging

Because TP / TA rails are a screw/clamp system, they have a great advantage over other systems. The rail can be adjusted up and down, and also side to side, to compensate for irregularities in the door opening. Also, the clip-on rail cover has advantages. Because the door can be hung and secured without it, the covers need not be fixed until the wet trades have finished and the cleaners have been through.

#### No glass preparation, firm fixing

dormakaba has an intimate knowledge of the special properties of glass as a building material. This has led to the design of rails requiring no glass preparation – no holes, no cut-outs. Carefully considered and positive measures have been taken to create the maximum clamping surface with optimum clamping efficiency.

## Two heights, length to order, to suit 10 mm or 8 mm and 12 mm $\,$

glass thickness – further glass thicknesses and versions for bullet-proof glass on request All TP / TA door rails are available in 100 mm (4") or 76.5 mm (3") heights, and in lengths to your order. They are supplied as standard for 10 mm glass thickness; but with replacement gasket they will suit 12 mm or 8 mm glass thicknesses. On request the door rails of 100 mmheight can also be realised for 13.5/15/17/19 and 21 mm glass thicknesses (for toughened, laminated glass) and versions for bullet-proof glass 13.5 – 30 mm glass thicknesses.

## Variable pivot point and absolute pinch free on door rails for centre hung doors TP

All the inserts for door rails in the TP / TA range haven been designed and manufactured to give two options in the pivot point distance from the sidepanel or frame. It can be either 55 mm or 65 mm (distance from pivot point to door edge – 53 mm and 63 mm respectively). In order to change from the standard dimension of 65 mm to 55 mm, the standard insert is unscrewed from the patch, rotated through 180°, and refixed position. At 65 mm pivot point and the use of a special round profile (page 124) doors can be built pinch free (constant air gap of 4 mm).

#### Reliability built in

Quality materials and thorough workmanship mean that TP / TA rails have the features necessary to meet the most demanding of specifications.

#### Short delivery times

All standard articles as per price list are available ex-stock (factory). Specials will be prepared promptly.


#### Finishes

Special coatings are required at extreme environment conditions (i.e. coastal areas).

\*Extract from DIN 18251, class 3: type-test with 50,000 locking bolt operating cycles.

TP/TA

# **Technical specifications**

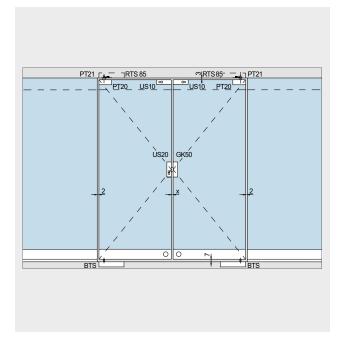

Glass size – height:						
Rail height – 100	mm	Rail height – 76.5 mm				
Use of rail(s)	total door height less	Use of rail(s)	total door height less			
bottom	75.0 mm	bottom	56.5 mm			
top	75.0 mm	top	56.5 mm			
bottom + top	150.0 mm	bottom + top	113.0 mm			

Please treat floor and ceiling clearances separately

### Gap required between pairs of doors:

Offset hung doors:	
Individual leaf width	Х
over 1,000 mm	4 mm
1,000–600 mm	6 mm
600-400 mm	8 mm

Centre hung doors:

X = 4 mm


RTS = transom closer

#### Maximum dimensions for use of bottom door rails in combination with top door rails or top patch fittings


	Panel type		om door r tandard	ail	Bottom door rail special type with bottom strap in forged steel		Comments	
		weight kg	width mm	height mm	weight kg	width mm	height mm	*For high frequent- ed doors we generally recom- mend to use the
Door rails for centre hung doors, combined with								bottom strap in forged steel with reduced max.
Patch fittings UNIVERSAL	•	110	1,200	3,000	120	1,200	3,500	measurements.
Patch fittings EP UNIVERSAL pinch	•	100	1,100	3,000				15/18 mm ***only for double- action doors with
Door rails standard	•	120	1,200	3,500	150*** (120*)	1,400*** (1,200*)	4,000 (3,500*)	door rail top and botton
Door rails for offset hung doors in toughened glass assemblies, combined with								34 mm door stap for toughened glass assemblies
Patch fittings EA	•	100	1,200	3,000				
Door rails standard	٠	100	1,200	3,500				
Door rails for offset hung doors in rebated frames (24 mm/26 mm rebate depth), combined with								40 mm/42 mm door stap for 24 mm/26 mm rebate depth
Patch fittings EA	•	90	1,100	3,000				
Door rails standard	•	90	1,100	3,500				
Door rails for offset hung doors in rebated frames (27 mm – 40 mm rebate depth), combined with								43 mm/58 mm door stap for 27 mm-40 mm rebate depth
Patch fittings EA	•	80	1,000	3,000				
Door rails standard	•	80	1,000	3,500				

Torque for fixing screws: Screws M 8 : 20 Nm

## **Rail cross sections**

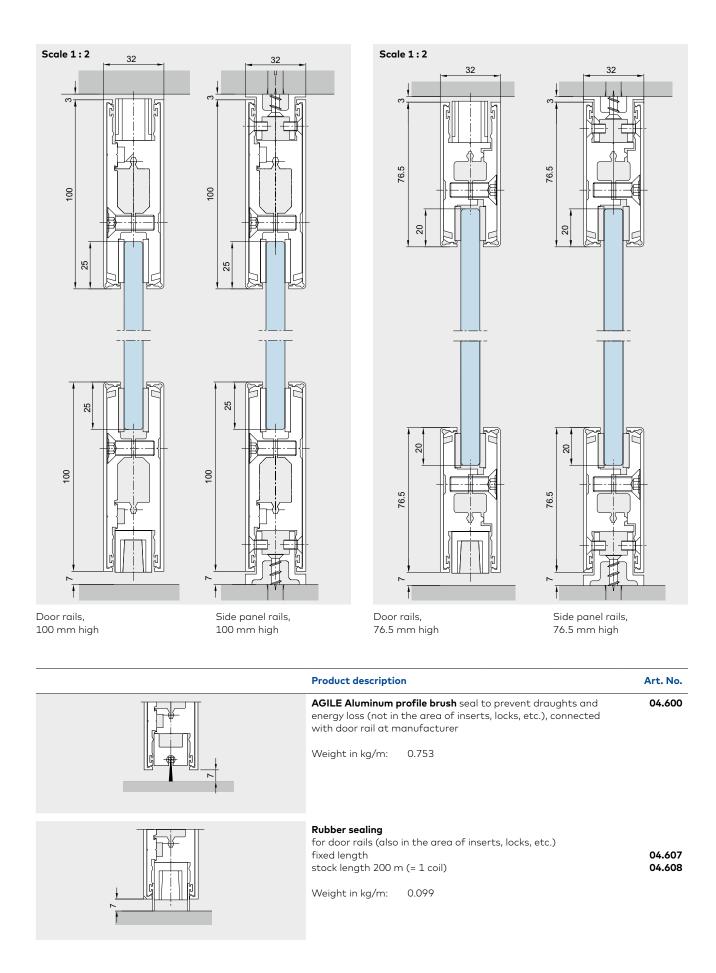


### **Construction details**

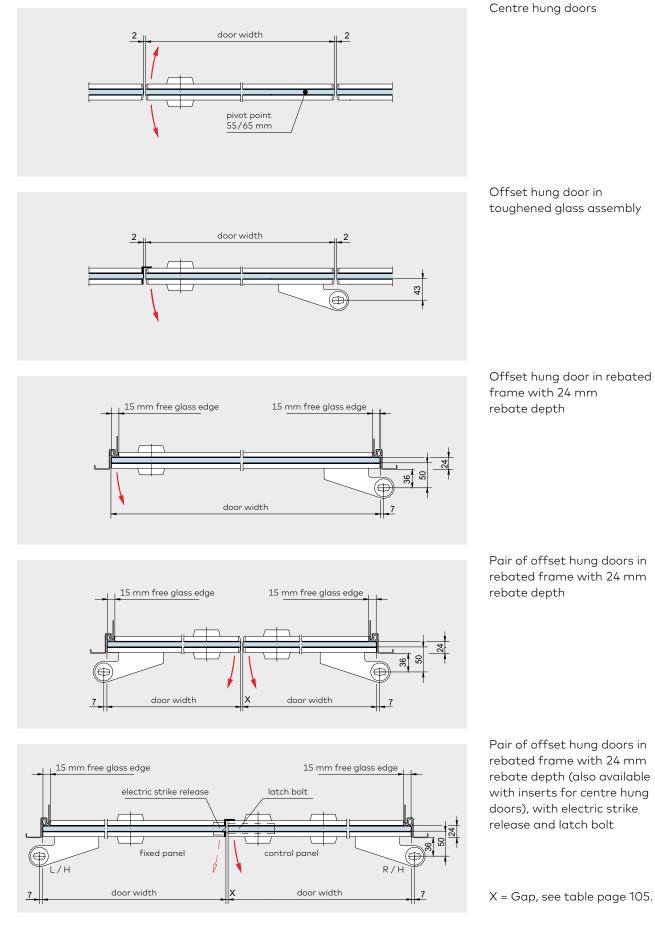

01/20

# Door rails for offset hung doors in toughened glass assemblies without rebated frames


Complete, for 10 mm glass thickness, strap 34 mm, without free glass edges, pivot point to glass surface 43 mm

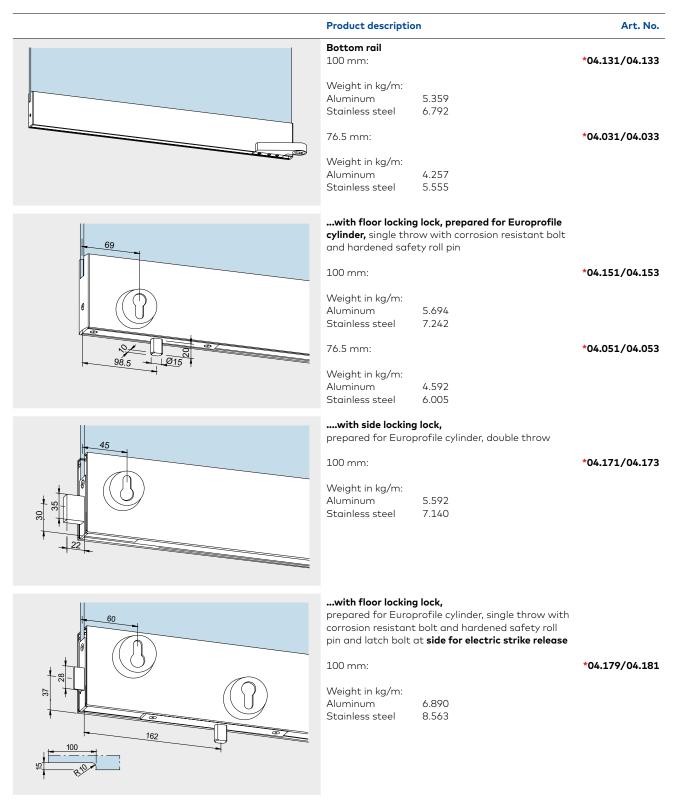

 $^{\star}\mbox{Left}$  / right hand (illustration shows right hand) are determined by view from hanging side.

	Product description	Art. No.
	Bottom rail with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and electric strike release at side (Standard: fail secure function, 6 to 12 V -/~) 100 mm: Weight in kg/m: Aluminum 5.837 Stainless steel 7.385	* <b>04.183/04.185</b> (zu Art. No. 4.181/04.179)
	<b>Top rail</b> 100 mm:	*04.132/04.134
	Weight in kg/m:Aluminum5.289Stainless steel6.75976.5 mm:	*04.032/04.034
<u>98.5</u> <u>98.5</u> <u>015</u>	with top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin	
	100 mm: Weight in kg/m: Aluminum 5.624 Stainless steel 7.209	*04.152/04.154
69	76, 5 mm: Weight in kg/m: Aluminum 4.522 Stainless steel 5.972	*04.052/04.054
	with side locking lock, prepared for Europrofile cylinder, double throw	
	100 mm: Weight in kg/m: Aluminum 5.522 Stainless steel 7.107	*04.172/04.174

\*Left / right hand (illustration shows right hand) are determined by view from hanging side.

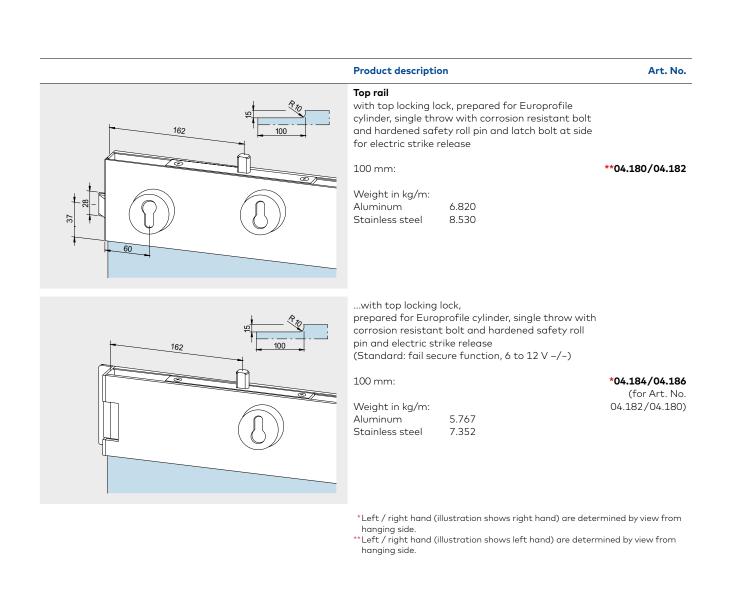


#### Door rails for offset hung doors in rebated frames

#### With 24 mm rebate depth

Complete, for 10 mm glass thickness, strap 40 mm, with free glass edge left and right, pivot point to glass surface 50 mm Also available for rebate depths up to 40 mm.

If required, please talk to our Application Engineering people.

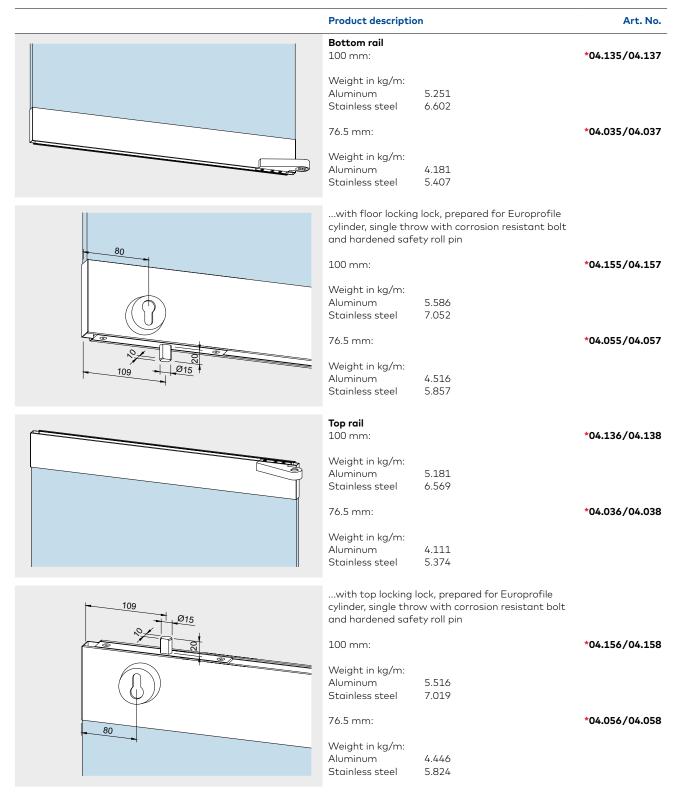


 $^{*}\mbox{Left}$  / right hand (illustration shows right hand) are determined by view from hanging side.

# Door rails for double offset hung doors in rebated frames


#### With 24 mm rebate depth

Complete, for 10 mm glass thickness, strap 40 mm, with 15 mm free glass edge of hanging stile, pivot point to glass surface 50 mm

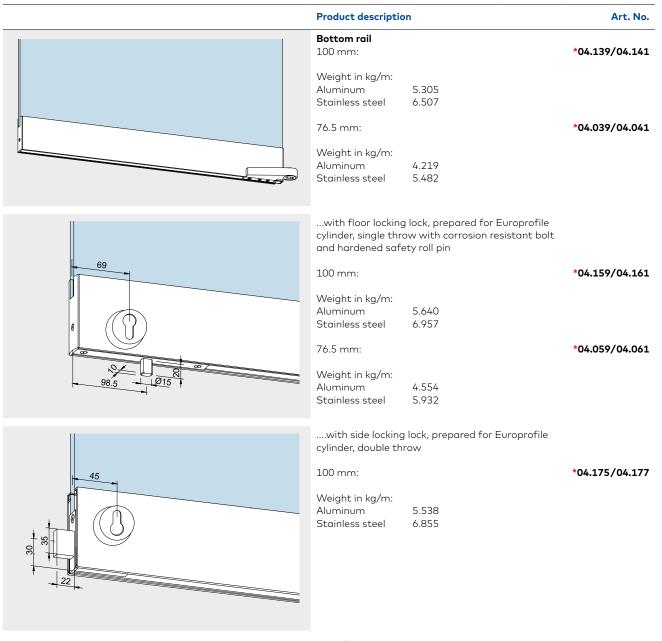

 $^{*}\mbox{Left}$  / right hand (illustration shows right hand) are determined by view from hanging side.

Product description	Art. No.
Bottom rail         with floor locking bolt lock,         prepared for Europrofile cylinder, single throw with         corrosion resistant bolt and hardened safety roll         pin and latch lock at side for electric strike release         100 mm:         Weight in kg/m:         Aluminum       5.803         Stainless steel       7.306	*04.143/04.145
<ul> <li>with floor locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and electric strike release at side (Standard: fail secure function, 6 to 12 V -/-)</li> <li>100 mm:</li> <li>Weight in kg/m: Aluminum 5.653 Stainless steel 7.150</li> </ul>	*04.147/04.149
*Left / right hand (illustration shows right hand) are determ hanging side.	nined by view from

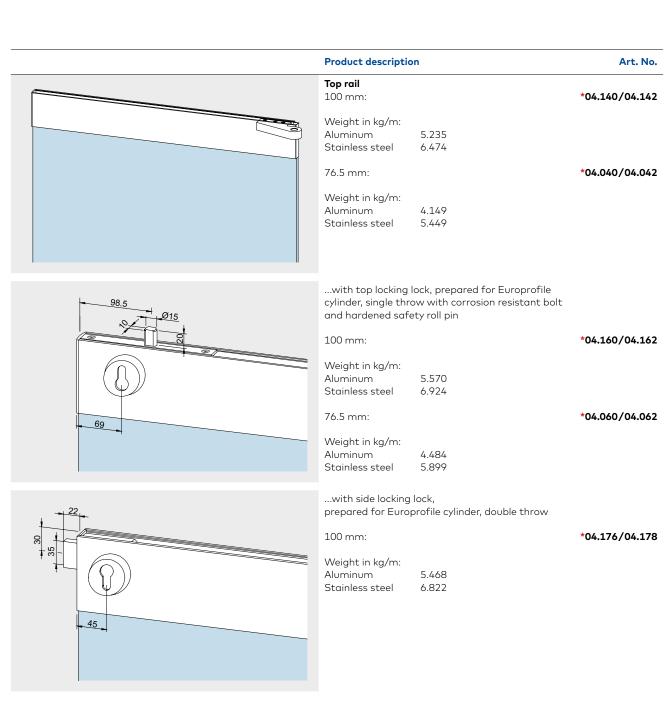


 $^{*}\mbox{Left}$  / right hand (illustration shows right hand) are determined by view from hanging side.

Product description	Art. No.
Top railwith top locking lock, prepared for Europrofilecylinder, single throw with corrosion resistant boltand hardened safety roll pin and latch bolt at sidefor electric strike release100 mm:Weight in kg/m:Aluminum5.733Stainless steel7.236	*04.144/04.146
with top locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin and electric strike release at side (Standard: fail secure function, 6 to 12 V –/~) 100 mm: Weight in kg/m: Aluminum 5.583 Stainless steel 7.080	<b>**04.148/04.150</b> (for Art. No. 04.182/04.180)
*Left / right hand (illustration shows left hand) are deterr hanging side **Left / right hand (illustration shows right hand) are dete hanging side.	,

### Door rails for double-action doors

Pivot point 55/65 mm

Complete, for 10 mm glass thickness

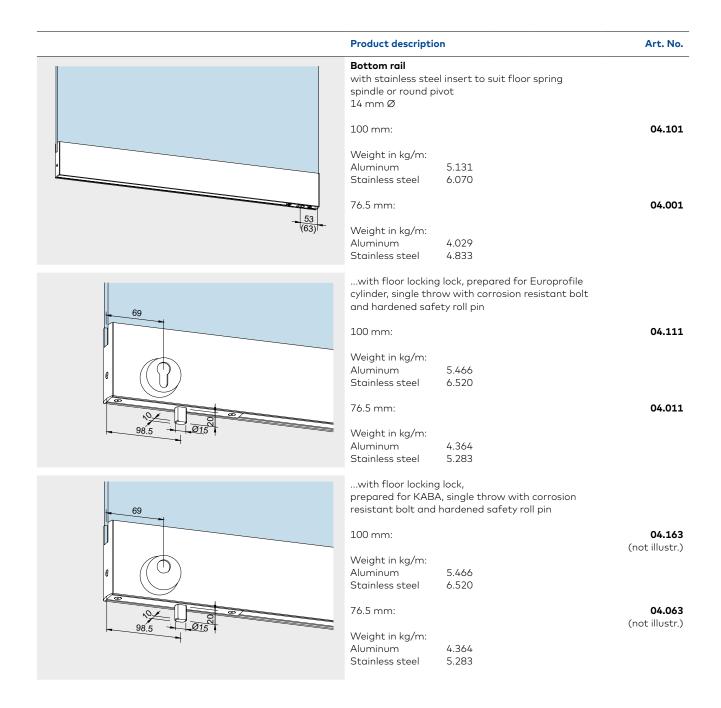

Product description	Art. No.
with side locking lock, prepared for Europrofile cylinder, double throw 100 mm: Weight in kg/m: Aluminum 5.364 Stainless steel 6.418	04.121
Bottom railwith latch lock at side for electric strike releaseand floor locking bolt lock, prepared for Europrofilecylinder, single throw with corrosion resistant boltand hardened safety roll pin. The use of latch lockor electric strike release results from a single-actiondoor situation.Weight in kg/m:Aluminum6.667Stainless steel8.335	*04.191/04.193
<ul> <li>with electric strike release at side         <ul> <li>(Standard: fail secure function, 6 to 12 V -/~)</li> <li>and floor locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin. The use of latch lock or electric strike release result from a single-action door situation.</li> </ul> </li> <li>Weight in kg/m:         <ul> <li>Aluminum</li> <li>5.586</li> <li>Stainless steel</li> <li>6.640</li> </ul> </li> </ul>	*04.196/04.198
*Order of Art.No.: Left hand / right hand – determined by vi side.(Illustration shows right hand)	ew from hanging

	Product description Art. No
	53 (63) 53 53 53 53 53 53 53 53 55 53 55 55 55
	100 mm: 04.10
	Weight in kg/m: Aluminum 4.979 Stainless steel 5.918
	76.5 mm: <b>04.00</b>
	Weight in kg/m: Aluminum 3.877 Stainless steel 4.681
<u>98.5</u> 98.5	and top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin
	100 mm: <b>04.11</b>
	Weight in kg/m: Aluminum 5.466 Stainless steel 6.368
- 69	76.5 mm: <b>04.01</b>
	Weight in kg/m: Aluminum 4.212 Stainless steel 5.131
98.5	with top locking lock prepared for KABA, single throw with corrosion resistant bolt and hardened safety roll pin
	100 mm:
	Weight in kg/m:     04.16       Aluminum     5.314     (not illustr       Stainless steel     6.368
	76.5 mm:
69	Weight in kg/m: <b>04.06</b> Aluminum 4.212 (not illustr Stainless steel 5.131

Product description	Art. No.
Top railwith side locking lock, prepared for Europrofile cylinder, double throw100 mm:Weight in kg/m: AluminumAluminum5.212 Stainless steel6.266	04.122
with latch lock at side for electric strike release and top locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin. The use of latch lock or electric strike release results in a single-action door situation. Weight in kg/m: Aluminum 6.592 Stainless steel 8.148	*04.192/04.194
with electric strike release at side (Standard: fail secure function, 6 to 12 V -/-) and top locking bolt lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin. The use of latch lock or electric strike release results in a single-action door situation. Weight in kg/m: Aluminum 6.492 Stainless steel 8.048	**04.197/04.199
<ul> <li>with latch lock, locking to ceiling, prepared for Europrofile cylinder, single throw (necessary stop on site). The use of latch lock or electric strike release (on site) results in a single-action door situation.</li> <li>100 mm:</li> <li>Weight in kg/m: Aluminum 5.294 Stainless steel 6.348</li> </ul>	04.118
*Left / right hand (illustration shows left hand) are determ hanging side. **Left / right hand (illustration shows right hand) are deterr	


\*\*Left / right hand (illustration shows right hand) are determined by view from hanging side.

	Product description	Glass thickness	Art. No.
	<b>Top rail</b> with insert for RTS transom closer		
	100 mm:		04.106
	Weight in kg/m: Aluminum 5.145 Stainless steel 6.207		
	76.5 mm:		04.006
	Weight in kg/m: Aluminum 4.043 Stainless steel 4.847		04.000
<u>98.5</u> <u>015</u>	and top locking lock, prepared for Euro- profile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin		
	100 mm:		04.116
	Weight in kg/m: Aluminum 5.480 Stainless steel 6.657		
- 69	76.5 mm:		04.016
	Weight in kg/m: Aluminum 4.378 Stainless steel 5.297		
<u>98.5</u> <u>98.5</u> <u>015</u>	with top locking lock prepared for KABA, single throw with corrosion resistant bolt and hardened safety roll pin		
	100 mm:		04.167
	Weight in kg/m: Aluminum 5.480 Stainless steel 6.655		
- 69	76.5 mm:		04.067
	Weight in kg/m: Aluminum 5.145 Stainless steel 6.207		041007
+ 22	and side locking lock, prepared for Euro- profile cylinder, double throw		
	100 mm:		04.126
	Weight in kg/m: Aluminum 5.378 Stainless steel 6.555		
45	Not illustrated: <b>Gasket</b> (1 m = 1 pc.)	8 mm 12 mm	01.900 01.901

#### Door rails for double-action doors

#### Pivot point 18 mm

Complete, for 10 mm glass thickness

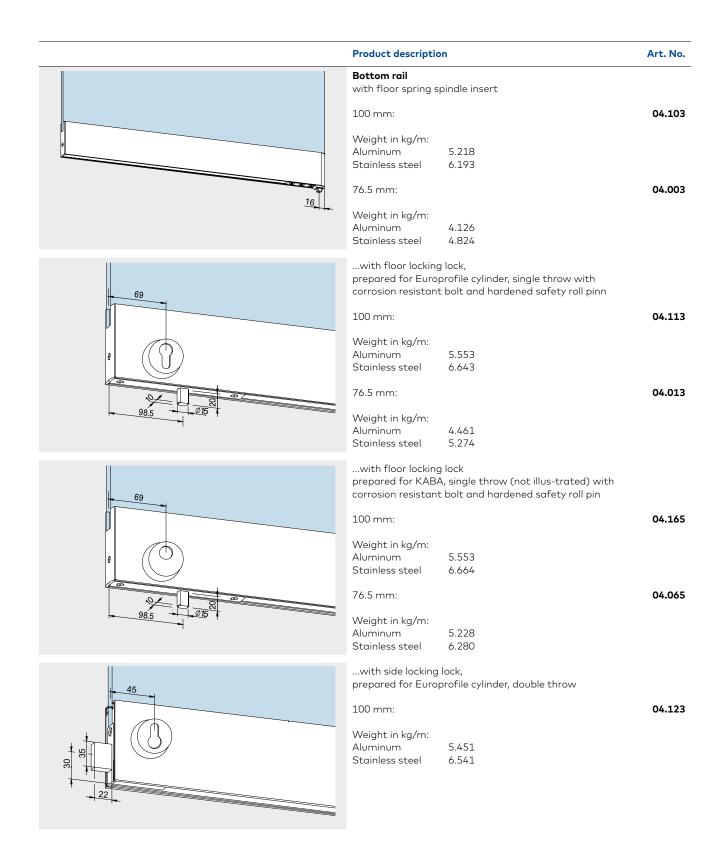


	Product description	Art. No.
	preprared for floor bearing	
	100 mm:	04.107
	Weight in kg/m:	
	Aluminum 4.938 Stainless steel 5.975	
θ	76.5 mm:	
	Weight in kg/m:	04.007
	Aluminum 3.898 Stainless steel 4.606	
	Stamess steer 4.000	
	Bottom rail	
69	with floor locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt	
	and hardened safety roll pin,	
	prepared for floor bearing	
	100 mm:	04.117
	Weight in kg/m: Aluminum 5.334	
	Stainless steel 6.425	
98.5 + 1215	76.5 mm:	04.017
	Weight in kg/m: Aluminum 4.243	
	Stainless steel 5.056	
11	with floor locking lock	
69	prepared for KABA, single throw with corrosion resistant bolt and hardened safety roll pin,	
	prepared for floor bearing	
	100 mm:	04.168
	Weight in kg/m:	
3	Aluminum 5.334 Stainless steel 6.425	
	76.5 mm:	
	Weight in kg/m:	04.068
	Aluminum4.243Stainless steel5.056	
	with side locking lock, prepared for Europrofile cylinder, double throw,	
45	prepared for floor bearing	
	100 mm:	04.127
	Weight in kg/m: Aluminum 5.233	
	Stainless steel 6.323	
22		

TP/TA

	Product description	Art. No.
	<b>Top rail</b> with 15 mm Ø pivot pin	
	100 mm:	04.104
	Weight in kg/m: Aluminum 5.000 Stainless steel 5.975	
	76.5 mm:	04.004
	Weight in kg/m: Aluminum 3.908 Stainless steel 4.606	
98.5 98.5 98.5	and top locking lock, prepared for Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin	
	100 mm:	04.114
	Weight in kg/m: Aluminum 5.335 Stainless steel 6.425	
69	76.5 mm:	04.014
	Weight in kg/m: Aluminum 4.243	
	Stainless steel 5.056	
98.5 98.5 98.5	with top locking lock prepared for KABA, single throw with corrosion resistant bolt and hardened safety roll pin	
	100 mm:	04.166
	Weight in kg/m: Aluminum 5.335 Stainless steel 6.425	
69	76.5 mm:	04.066
	Weight in kg/m: Aluminum 4.243 Stainless steel 5.056	
<u>-++ 22</u> ,	with side locking lock, prepared for Europrofile cylinder, double throw	
	100 mm:	04.124
	Weight in kg/m: Aluminum 5.233 Stainless steel 6.323	
45		


### **Radiused edging strip**

Acryl, transparent, to clamp onto free glass edge. For optimal pinch protection. For application with door rails with 18 mm pivot point.

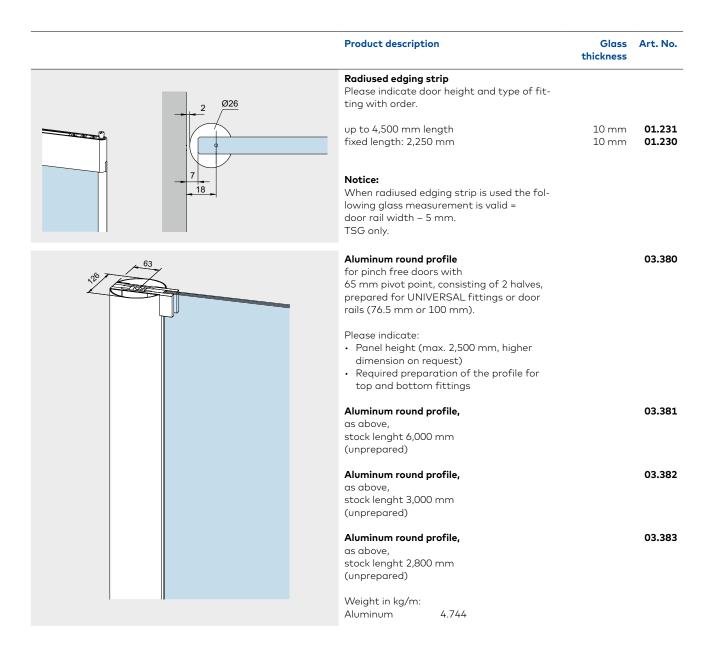


### **Rails for side panel**

complete, for 10 mm glass thickness

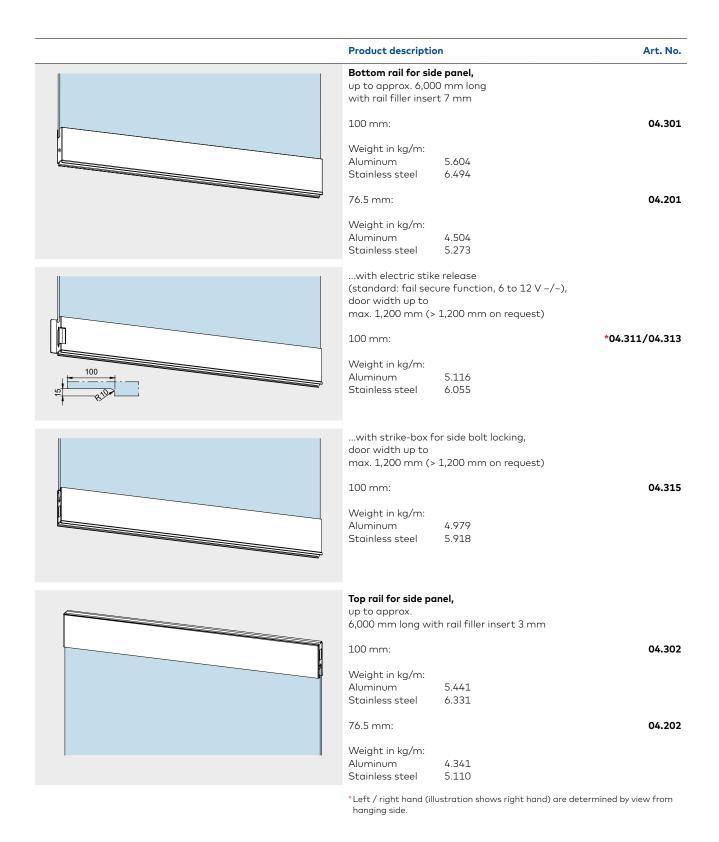

11/17

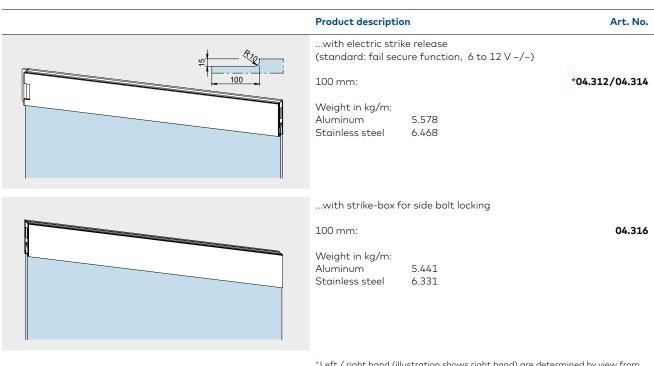


#### $^{\star}\mbox{Left}$ / right hand (illustration shows right hand) are determined by view from hanging side.

## Space for your notes

### Top centre frame portion

#### with patch fittings see EA

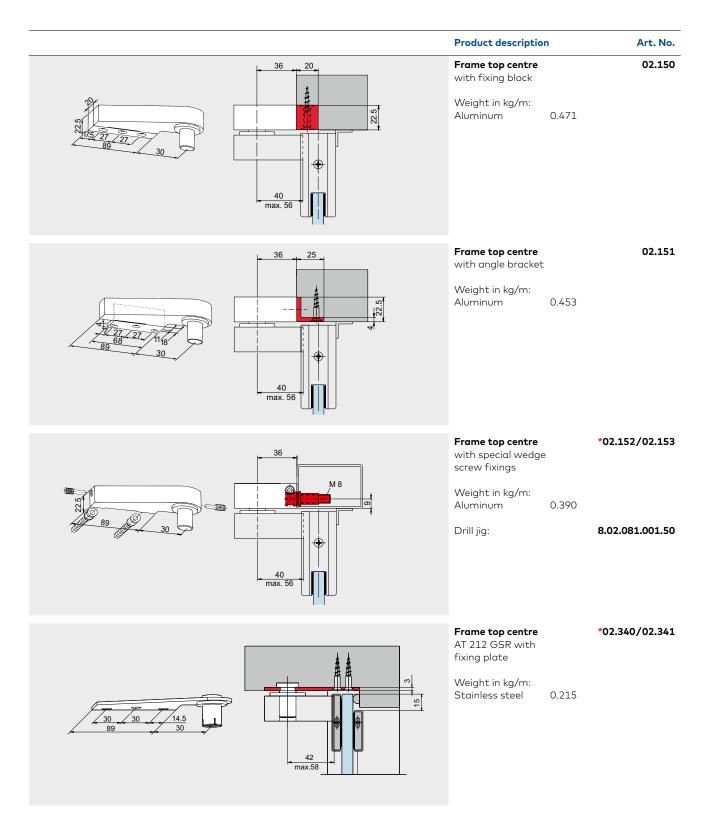


\*Left / right hand (illustration shows right hand) are determined by view from hanging side.

TP/TA

## Special accessories and special inserts for door rails

 Product description	Art. No.
Aluminum profile with brush seal to prevent draughts and energy loss (not in the area of inserts, locks, etc.), connected with door rail at manufacturer Weight in kg/m: 0.753	04.600
<b>Rubber sealing</b> for door rails (also in the area of inserts, locks, etc.) fixed length stock length 200 m (= 1 coil) Weight in kg/m: 0.099	04.607 04.608
Aluminum round profile for pinch free doors with 65 mm pivot point, consisting of 2 halfs, prepared for UNIVERSAL fittings* or door rails (76.5 mm or 100 mm). Please indicate: • Panel height (max. 3,000 mm, higher dim. on request) • Required preparation of the profile for top and bottom fittings fixed length Weight in kg/m: Aluminum 4.744 stock length 6,000 mm (not prepared) stock length 3,000 mm (not prepared)	03.380 03.381 03.382
Screw-on floor bearing for damp environment, without floor recess, with inserts for door rails, max. 80 kg Weight in kg/m: 0.193	01.136

\*Information as to the product UNIVERSAL you may find in the technical brochure "Patch fittings for toughened glass assemblies"

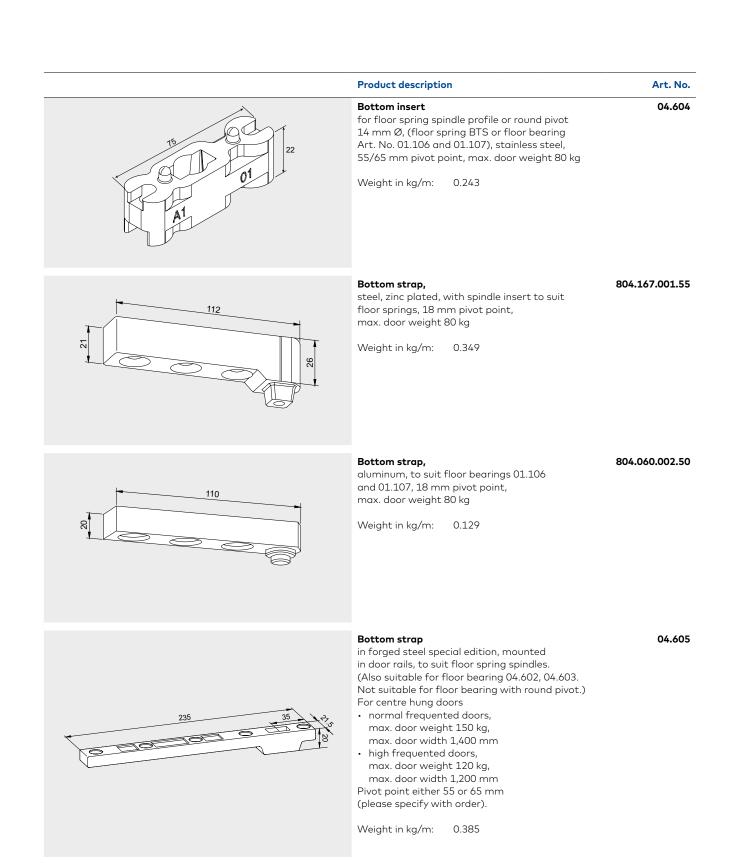

TP/TA

	Product description	Art. No.
	<b>Top insert</b> 55/65 mm pivot point, Aluminum Weight in kg/m: 0.091	04.610
	Top insert, two part, Aluminum, special, 55/65 mm pivot point not in standard door railWeight in kg/m:0.088	04.606
	<b>Top insert</b> for RTS transom closer, zinc plated steel, 65 mm pivot point Weight in kg/m: 0.240	04.611
Ø15 0 0 110	<b>Top strap</b> Aluminum, 18 mm pivot point Weight in kg/m: 0.131	804.060.001.50

12/20

## **Content** MANET Compact

134 General information
151 Type illustrations
188 Accessories
212 Safety-related information



# MANET Compact

#### **MANET Compact sets**

The aesthetic elegance of the MANET Compact concept is also available in the form of standardized sets for simple, fast planning of the more popular system types.

Optional accessories enable the individual sets to be semi-customized. The system components offer numerous adjustment possibilities in order to ensure problem-free installation of whichever door type - swing or single-action or double-action - is required. Wall abutment profiles may need to be provided (by others) for fixing overpanels and sidelights.





<u>3</u><sup>-0,2</sup>


Countersunk bore for coun- Cylindrical bore for clamptersunk single-point fixings ing disc single-point fixings




max. door panel height 2,500 mm max. door panel width 1.200 mm max. door panel weight 80 kg


Pivoting fitting short type,

Pivoting fitting short type with intermediate tube, max. door panel height 2,500 mm max. door panel width 1,200 mm max. door panel weight 80 kg







Pivoting doors set 1





Construction 2 (1 set)







Construction 5 (2 sets) Construction 6 (2 sets)




Construction 3 (1 set)




Construction 7 (2 sets)





Construction 8 (2 sets)

**Pivoting doors** with overpanel and sidelight set 3




Construction 13 (1 set) Construction 15 (1 set)




#### Set 1

#### Pivoting door MANET Compact without overpanel for 10 – 12 mm glass

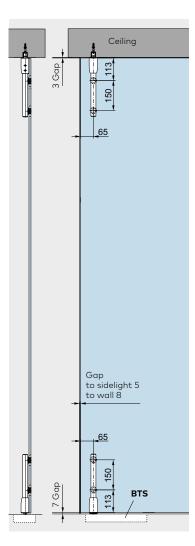

Door weight 80 kg Door height max. 2,500 mm Door width max. 1,200 mm TSG 10/12 mm glass thickness

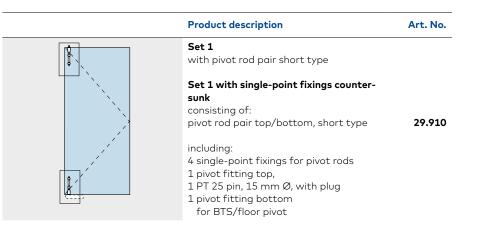


#### Accessory options for Set 1

Pull handles	Length	Art. No.
Pull handles	350	29.268
(single-point fixing countersunk)	720	29.271
	1,240	29.274
	1,760	29.277
Pair of pull handles	350	21.267
	720	21.270
	1,240	21.273
	1,760	21.276
Lock		
Corner lock		21.448
Corner lock with rose on one lock side		21.449
Profile cylinder for corner lock 21.448/449		14.206
Eccentric bushing for corner lock 21.448/449		05.194
Further accessories		
Stop for pivoting door with ceiling mounting		21.334
Ceiling fixing (bearing function)		29.337
Floor pivot bearing		01.106
Assembling tool for MANET single-point fixings		21.134

#### Set 3

#### Pivoting door MANET Compact with overpanel for 10 – 12 mm glass

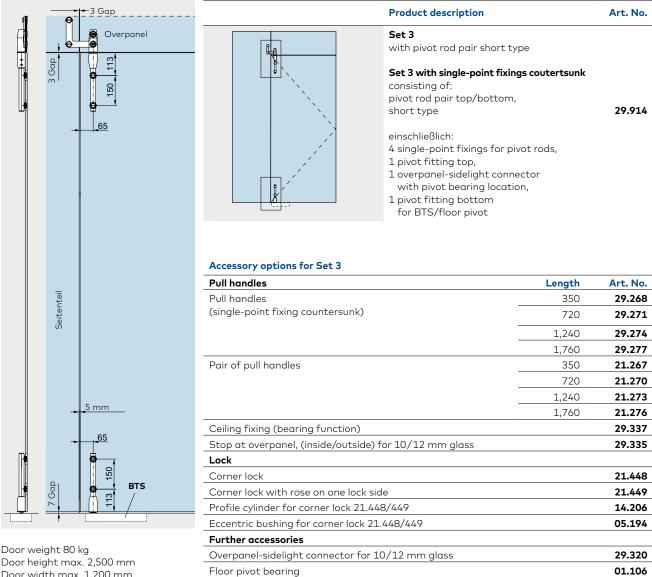

Door height max. 2,500 mm Door width max. 1,200 mm TSG 10/12 mm glass thickness

Floor pivot bearing Assembling tool for MANET single-point fixings

21.134

## Space for your notes

## **Content** MANET Concept

140 General information
141 Components
146 Glass preparation
188 Accessories
212 Safety-related information

All elements up to and including the pull handles are available in an elegant stainless steel finish.All the components are manufactured from the steel grade 1.4305 (approx. AISI 303) for normal interior applications. **Note:** The products detailed in this brochure are exclusively intended for glass assemblies that do not require separate building regulations approval.




# MANET Concept

#### **Pivoting door system**


MANET pivoting doors can be installed in both glass partitions and masonry openings. They come as both single and double-action swing doors. All the single-point fixings are designed for clip-on covers for easier installation. Other components include the bottom pivot bearing, top pivot fittings with bearing spigot or eccentric bushing and also overpanel/ sidelight connectors.

As a result, there are almost unlimited possibilities for inte-grating frameless swing doors both in masonry openings – with or without overpanels and sidelights – and in glass partition constructions retained by single-point fixings. Whether with a full-length pivot rod or a pair of shorter pivot rods, the top bearing socket is located in the fitting on the door leaf. This means that connection to the ceiling, lintel or transom can now be provided in the form of the standard PT25 top pivot spigot from the dormakaba range. The door assemblies can be equipped with floor springs such as the dormakaba BTS 75V or BTS 84, and corner locks are naturally also available.




Pivot bearing with full-length pivot rod, max. door panel height 3,000 mm max. door panel width 1,200 mm max. door panel weight 100 kg


From a door panel height of 2,700 mm a fifth single-point fixing is recommended.




Pivot bearing with pivot rod pair short type, max. door panel height 2,500 mm max. door panel width 1,200 mm max. door panel weight 80 kg



Pivot bearing with pivot rod pair short type with intermediate tube, max. door panel height 2,500 mm max. door panel width 1,200 mm max. door panel weight 80 kg

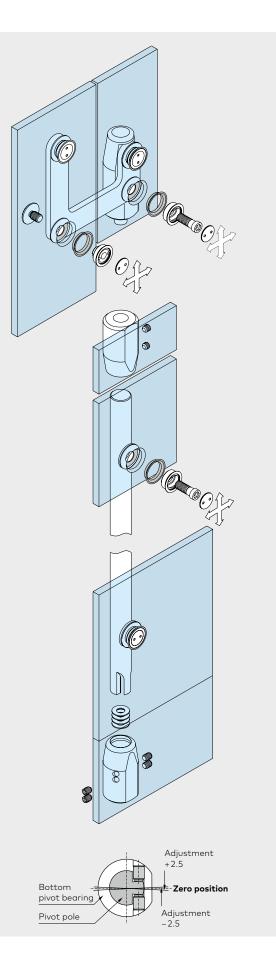


### Components for pivoting door system

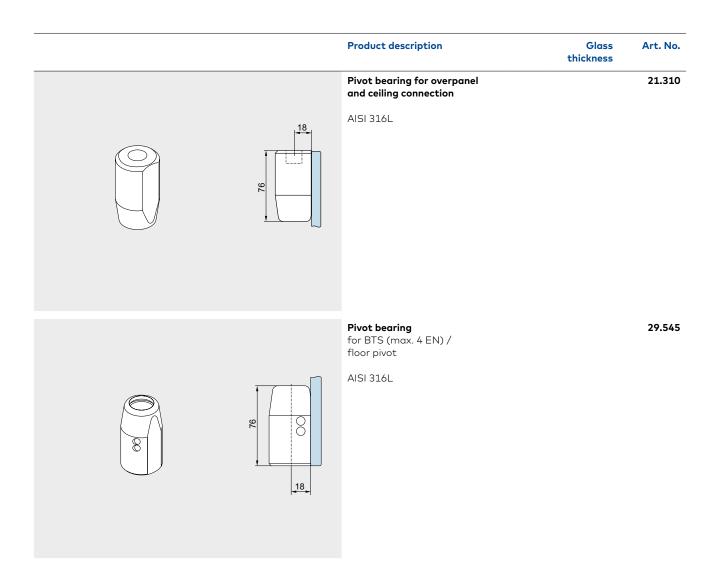

## Components for pivoting door system


		Product description	Glass thickness	Art. No.
9		<b>Pivot rod,</b> drilled, fixed length		29.551
2		Single-point fixing, countersunk, fixed (1)	10, 12 mm	29.460
	83	AISI 316L		
	ø 33	clamping disc, fixed (1)	13.5–15.5 mm	
<b>D</b> 2		AISI 316L	10, 12 mm	
	ø 25	Single-point fixing,		
		countersunk, centering (2)	10, 12 mm	29.462
<b>D</b> -2		AISI 316L	13.5–15.5 mm	
	a 33	clamping disc, centering (2)		
	8		10, 12 mm	
	Glass thickness	From a door panel height of 2,700 mm a fifth single-point fixing is recommended.		
Ŵ				

#### **Glass fixing**

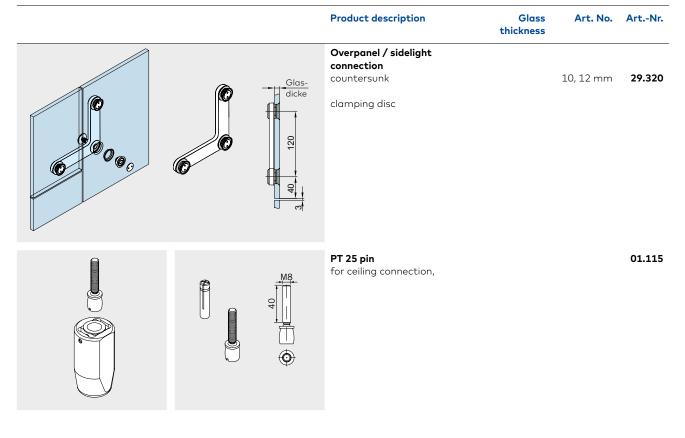

### Accessories

	Product description	Glass thickness	Art. No.
Ceiling Ceiling	Stop for pivoting door with ceiling mounting		21.334
Wand Glas	<b>Stop for pivoting door</b> floor mounting		29.950

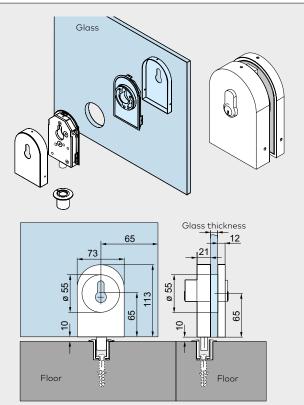

Product description	Glass thickness	Art. No.
Corner lock	8–12 mm	21.448
<b>Corner lock</b> with profile cylinder rose on inside	8–12 mm	21.449
<b>Dead lock for KABA with rose</b> on inside	8–12 mm	
<b>Profile cylinder</b> for corner lock		14.206

0	ø 40
	m R Floor
	ø 25


Eccentric bushing	05.194
for corner lock	


**Bushing,** plastics

Strike plate

05.190


00.110








## Glass preparation for pivoting door system



Countersunk bore for countersunk single-point fixings





Cylindrical bore for clamping disc single-point fixings


The gap and distance dimensions recommended by dormakaba are indicated in the adjacent table.


Glass thick- ness mm	Connection	X Gap	Y
10/12	Sidelight	5	65
	Wall	8	
13.5-15.5	Sidelight	8	62
	Wall	11	

Detail A










Detail B at wall


Detail A


at wall

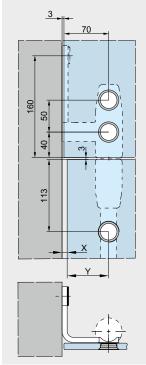



Detail B at glass wall


Detail C at wall





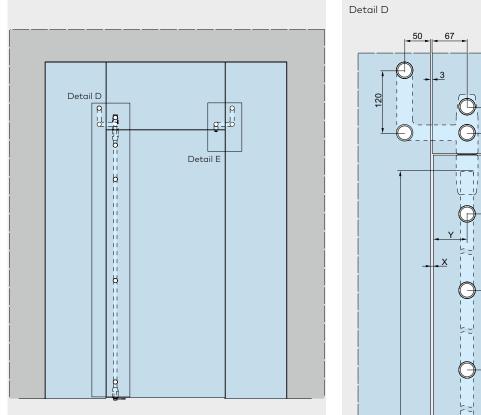




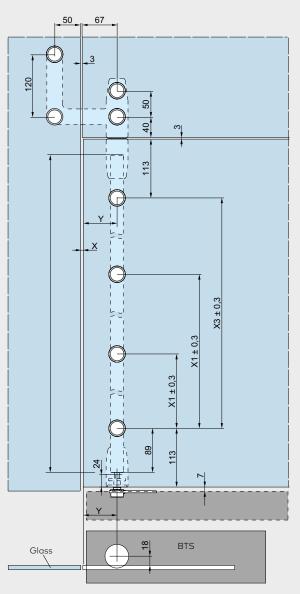


Detail E





Detail E with stop



## **Content** MANET Concept Connection system


150 General information

160 Components


161 Glass preparation

MANET Concept Connection system


## **Connection system**

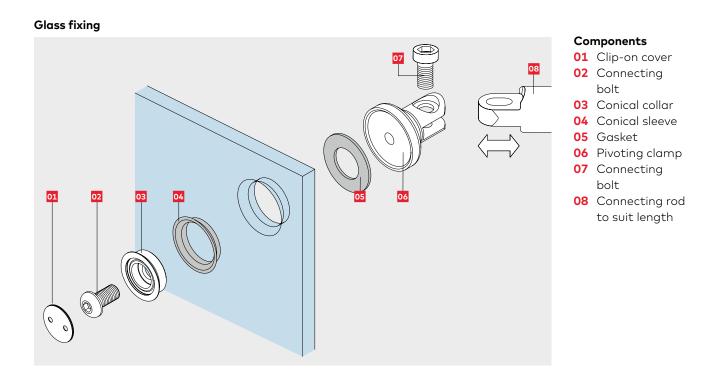


#### Connection ceiling / floor

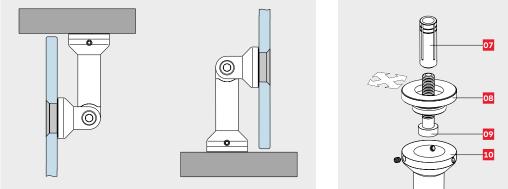


#### Alternative connection ceiling




Single-point fixing clamping disc





#### Components





#### Components

**11** Threaded rod M8 DIN 7984 M10 x..., or oval-head wood screw DIN 7996 M8 x... 12 Clip-on cover


## **Complete fitting**

	Product description	Glass thickness	Art. No.
Glass/Floor	Complete fitting Corner connector 90° (only bearing function)	8 – 12 mm	29.145
Single-point fixing clamping disc Single-point fixing countersunk	Complete fitting Ceiling fixing (bearing function) countersunk AISI 316L clamping disc AISI 316L	8 – 12 mm	29.337 29.338


Height adjustment via grub screw

### **Glass preparation connection system**


#### For TSG and LSG from TSG. Recommended centers for fixed glazing element

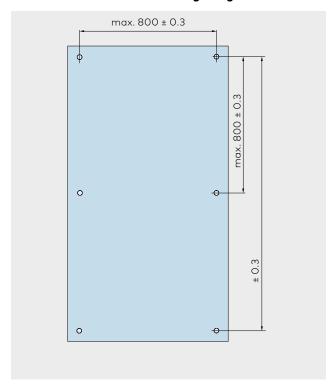


#### Countersunk bore for countersunk single-point fixings




#### Cylindrical bore for clamping disc single-point fixings







Corner connector glass / ceiling



#### Corner connector glass / floor



#### Ceiling fixing (bearing)



**Note:** Ensure compliance with minimum glass/bore clearances as per glass manufacturer recommendations. Glass preparation with a tolerance of max. ± 0.3 mm is recommended.

## **Content** SG

156 General information
156 Components
170 Glass preparation
188 Accessories
212 Safety-related information



SG

## A range of locks for all requirements

It doesn't matter what sort of glass door needs securing, what function it has to fulfill, or the type of fittings specified – there will be a lock in the SG range which will provide the shape, the function and the finish which you require.

#### Simple glass preparation, firm fixing

dormakaba has an intimate knowledge of the special properties of glass as a building material. This has led to the design of locks requiring only simple cutouts or holes in the glass. Carefully considered and positive measures have been taken to create the maximum clamping surface with optimum clamping efficiency.

#### **Reliability built in**

Quality materials and thorough workmanship mean that SG locks have the features necessary to meet the most demanding of specifications. Many satisfied customers will testify this. For safety reasons set lock case always on inside.

#### Short delivery times

All the common patterns and types are available ex-stock (factory). Specials will be prepared promptly.

## UNIVERSAL top, bottom, centre locks and strike boxes with glass cut-outs

Complete, for 10 mm glass thickness

	Product description	Glass thickness	Art. No.
	<b>US 10 corner lock,</b> prepared for Europrofile cylinder, single throw, bolt projection 20 mm, with security rosettes on both sides, 14 mm thick. Suitable gaskets have to be used for sys- tems with an 8 or 12 mm glass thickness. These are available on page 196.	10 mm	03.206
2 T	<ul> <li>Lock insert:</li> <li>high corrosion resistance according to EN 1670</li> <li>with regard to type-test according to DIN 18251, class 3*</li> </ul>		
	Not illustrated: prepared for KABA		
		10 mm	03.340
	For half profile cylinder left hand top/right hand bottom	10 mm	<b>03.288</b> not illustr.
	Weight in kg/m: Aluminum 0.942 Brass 1.061 Stainless steel 1.053		
	left hand bottom/right hand top	10 mm	03.287
	*Extract from DIN 18251, class 3: Type-test with 50,000 locking bolt operating cycles. Furthermore the lock was tested successfully by a neutral		not illustr.

testing institute with 500,000 latch and 100,000 locking bolt operating cycles.

SG

	Product description	Glass thickness	Art. No.
	GK 30 single overpanel strike box to suit US 10 corner lock Weight in kg: Aluminum 0.418 Stainless steel 0.536	10 mm	03.230
45 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Fixing platefor overpanel strike box GK 30 UNIVERSALWeight in kg: Aluminum 0.016Brass 0.038Stainless steel not available, satin chrome on brass supplied.		03.128
	Wall anchor with thread M 8 for overpanel patch UNIVERSAL Weight in kg: 0.040		01.133
	<b>Threaded rod</b> M 8 with plug for overpanel patch UNIVERSAL Weight in kg: 0.032		01.134


\*Left / right hand (illustration shows left hand) are determined by view from hanging side.

 Product description	Glass	Art. No.
 	thickness	
GK 20 double overpanel strike box         to suit US 10 corner locks, consisting of two         GK 30 with threaded connecting bolt         Weight in kg:         Aluminum       0.866         Brass       1.154         Satin stainless steel (700)       1.200         Suitable for glass thicknesses up to max.       12 mm. If thicker glass is required, please talk first to our Applications Engineering people.	10 mm	03.245
GK 20 with stop Weight in kg: Aluminum 0.926 Brass 1.234 Satin stainless steel (700) 1.192 Suitable for glass thicknesses up to max. 12 mm. If thicker glass is required, please talk first to our Applications Engineering people.		03.247
GK 40 corner overpanel strike box to suit US 10 corner lock Weight in kg: Aluminum 0.709 Brass 1.035 Stainless steel 1.010		03.250
<b>GK 41 strike box</b> for PT 41, with fin fitting Weight in kg: Aluminum 0.906 Stainless steel 1.270		*03.194/ 03.193
*Left / right hand (illustration shows left hand) are d hanging side.	etermined by vi	iew from

SG

Product description	Glass thickness	Art. No.
<b>GK 41 strike box</b> with fin fitting on both sides Weight in kg: Aluminum 1.103 Stainless steel 1.411		03.195
GK 42 strike box, angle 90°, for PT 42, with stop inside Weight in kg: Aluminum 0.910 Stainless steel 1.306 Not illustrated: GK 42, angle 135°		*03.274/ 03.275 *03.276/ 03.277
<ul> <li>US 20 centre lock, prepared for Europrofile cylinder, single throw, bolt projection 20 mm, with security rosettes 14 mm thick.</li> <li>Weight in kg: Aluminum 0.942 Brass 1.061 Stainless steel 1.053</li> <li>Lock insert: <ul> <li>high corrosion resistance according to EN 1670, class 4</li> <li>with regard to type-test according to DIN 18251, class 3**</li> </ul> </li> <li>Weight in kg: Aluminum 0.805 Stainless steel 0.925</li> <li>prepared for KABA</li> </ul>	10 mm	03.215 03.345 not illustr.
Prepared for one-sided Europrofile cylinder (see drawing 03.215) * Left / right hand (illustration shows left hand) are a hanging side. ** Extract from DIN 18251, class 3: Type-test with 50,		


\*\* Extract from DIN 18251, class 3: Type-test with 50,000 locking bolt operating cycles. Furthermore the lock was tested successfully by a neutral testing institute with 500,000 latch and 100,000 locking bolt operating cycles.

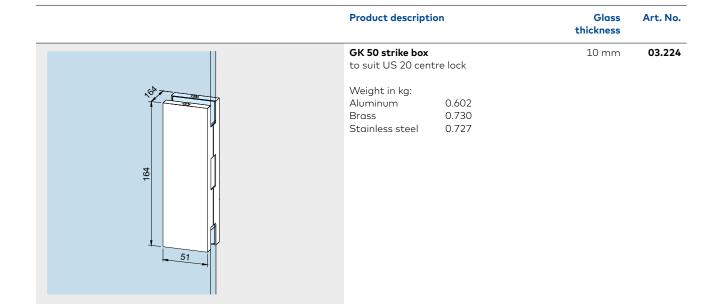

## Corner (OR centre) locks and strike boxes with drilled holes glass preparation

SG

Complete for 8, 10 and 12 mm glass thickness

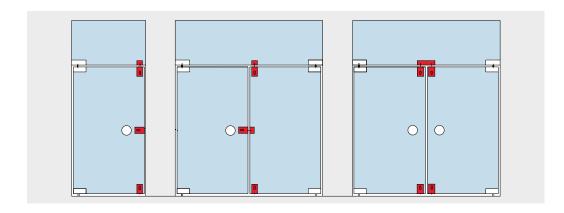


	Product description	Art. No.
61er PZ 30.5 8.5 10 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Corner lock,         for vertical or horizontal fixing, double throw,         bolt projection 20 mm, hardened oval bolt,         prepared for Europrofile cylinder         Weight in kg:         Aluminum       0.849         Brass       1.033         prepared for KABA         Weight in kg:         Aluminum       0.842         Brass       1.020         Prepared for one-sided Europrofile cylinder,         lockable from inside         Weight in kg:         Aluminum       0.858         Brass       1.038	<b>05.100</b> <b>05.105</b> not illustr. <b>05.116</b> not illustr.
61er PZ 30.5 .8510 15 15 15 15 15 15 15 15 15 15	Corner lock,         prepared for Europrofile         cylinder, rose inside         Weight in kg:         Aluminum       0.924         Brass       1.236	05.118

		Product description	Art. No.
61er PZ 30.5 8510 20	Corner lock,for vertical fixing, double throw, bolt projection 20 mm,hardened oval bolt, counterplate shortened to give15 mm free glass edge, prepared for Europrofile cylinderWeight in kg:Aluminum0.807	05.103	
	19 19	Prepared for one-sided Europrofile cylinder, lockable from inside Weight in kg: Aluminum 0.818 Brass 0.984	<b>05.117</b> not illustr.
85	15	Prepared for Europrofile cylinder, rose inside Weight in kg: Aluminum 0.882 Brass 1.184	<b>05.119</b> not illustr.
		Strike box         to suit corner lock (05.100, 05.105, 05.116),         for single und 2- door without stop         Weight in kg:         Aluminum       0.260         Brass       0.765	05.108
		with stop for Art. No. 05.103, 05.117, 05.119 Weight in kg: Aluminum 0.264 Brass 0.760	05.109 not illustr.

## Corner and centre locks without glass preparation


SG

#### Complete, for 10 and 12 mm glass thickness

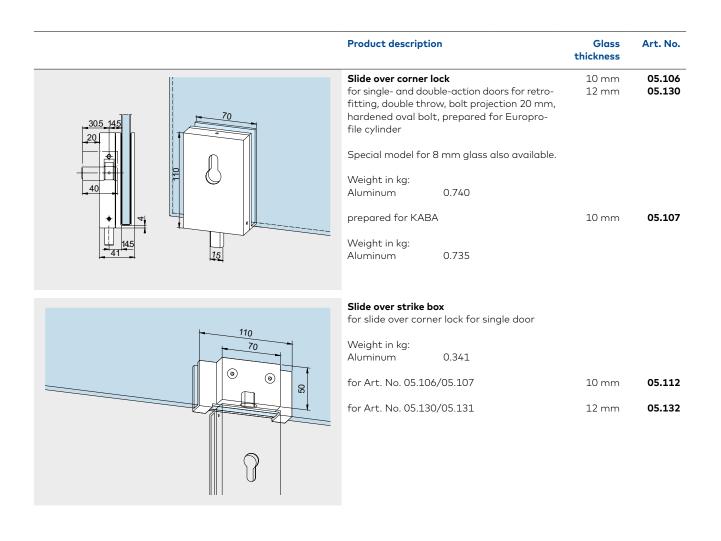


### Centre locks and strike boxes


#### Complete, for 10 mm glass thickness



Centre locks and strike boxes with drilled holes glass preparation

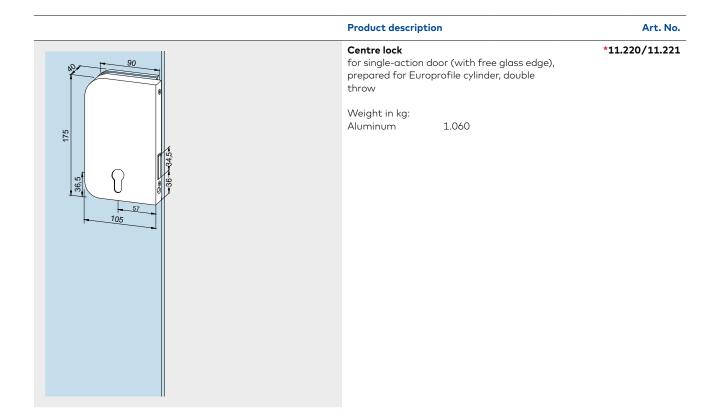

Product description Art. No.
Centre lock       *11.224/11.225         for single-action door (with free glass edge),       *11.224/11.225         with both latch and lock bolt, prepared for       lever on round rose inside, smooth blanking         plate outside,       prepared for Europrofile cylinder, double         throw       Weight in kg:         Aluminum       1.175         Strike box       to suit centre locks for:         Art. No. 11.224, 11.225         Art. No. 11.220, 11.221
Weight in kg: Aluminum 0.945
Lever handle, for inside11.226to suit centre locks for:Art. No. 11.224, 11.225,Art. No. 11.254, 11.255Weight in kg:Aluminum0.195
If used on glass doors in rebated frames and for 10 mm glass thickness, a minimum of 26–28 mm frame depth is needed.
*Left / right hand (illustration shows left hand) are determined by view from hanging side.

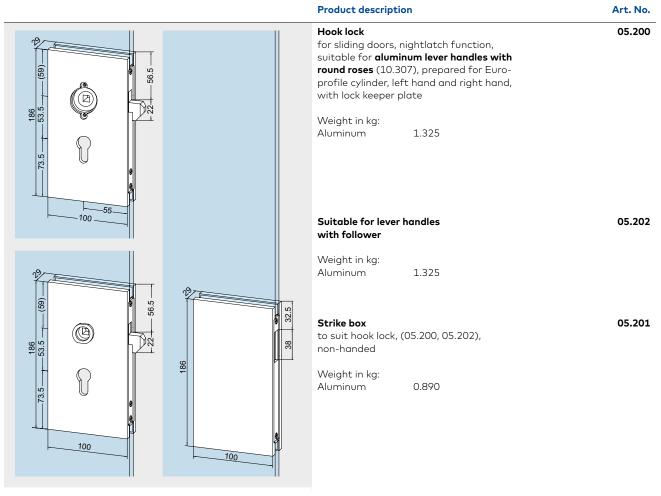

 $^{\star}\mbox{Left}$  / right hand (illustration shows left hand) are determined by view from hanging side.

SG

	Product description	Art. No.
	<b>Centre lock</b> with latch and lock bolt, for inward opening single-action doors, prepared for lever on round rose inside, smooth blanking plate outside, prepared for Europrofile cylinder Weight in kg:	*05.224/05.225
	Aluminum 1.090 Suitable lever handle see page 199	11.226
	<b>Centre lock</b> with latch and lock bolt, for inward opening single-action doors, prepared for rose lever on both sides, prepared for Europrofile cylinder	*05.228/05.229
	Weight in kg: Aluminum 1.090	
left hand right hand	<b>Strike box,</b> to suit centre lock with latch and lock bolt, <b>with electric strike release</b> (Standard: fail secure function, 6 to 12 V -/~, with me- chanical unlock. Further types on request.) (for Art. No. 05.224, 05.225)	*05.226/05.227
	Weight in kg: Aluminum 0.595	
H/ISO 6 door illustrated.	Angle bracket         for centre locks (opening to outside)         Weight in kg:       0.040	*05.218/05.219
LH/ISO 6 door illustrated.		

\*Left / right hand are determined by view from hanging side. \*\*Angle bracket (05.218/05.219) for door opening outwards (optional)

## Locks with panic function, opening to outside


#### for 8 and 10 mm glass thickness

**Operation outside:** Bolt is unlocked by turn of key, and latch is withdrawn by follower.

**Operation inside:** Lock can be operated by rose lever handle even when bolt is locked.

Not for emergency exit doors according to German Standard DIN EN 179 or DIN EN 1125 (corresponding modifications in preparation)

For best protection against burglary we recommend the use of the angle bracket (05.218/05.219)

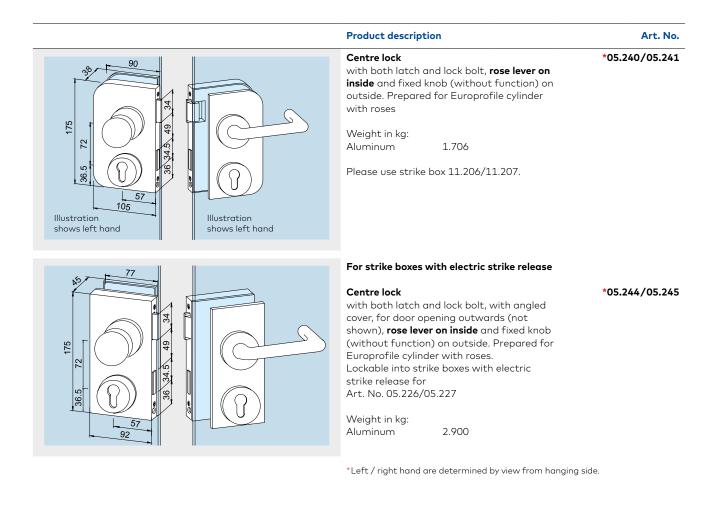

Additional exit devices for glass doors with panic function covered by approval certification can be found in the technical documentation of PHA 2000 and Exit Pad

### Self-locking panic locks, opening to outside

#### for 8 and 10 mm glass thickness

**Operation outside:** Bolt is unlocked by turn of key, and latch is withdrawn by follower. **Operation inside:** Lock can be operated by rose lever

handle even when bolt is locked.

For emergency exit doors according to German Standard DIN EN 179.

SG


	Product description	Art. No.
175 38 30 56 22	Centre lock OFFICE Junior SVP 5000with both latch, lock bolt self-locking function rose lever on inside and fixed knob(without function) on outside. Prepared forEuroprofile cylinder with rosesWeight in kg:Aluminum1.706	*05.250/05.251
129	Strike box for self-locking panic lock 05.250/05.251Weight in kg: Aluminum1.486	*05.252/05.253
<b>lease note:</b> or frame applications with 8 mm TSG a rebate depth of	*Left / right hand are determined by view from hanging si	de.

For frame applications with 8 mm TSG a rebate depth of min. 26 mm required. With 10 mm TSG, a fold depth of of at least 28 mm required.

## **Glass preparation locks**

R55

36

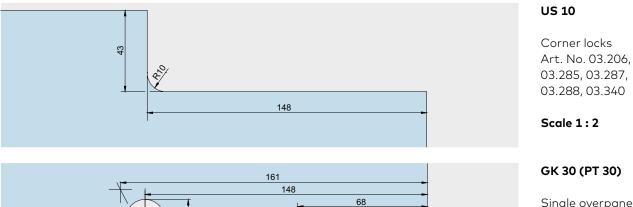


37

Reg

Single overpanel strike box Art. No. 03.230,


Scale 1:2

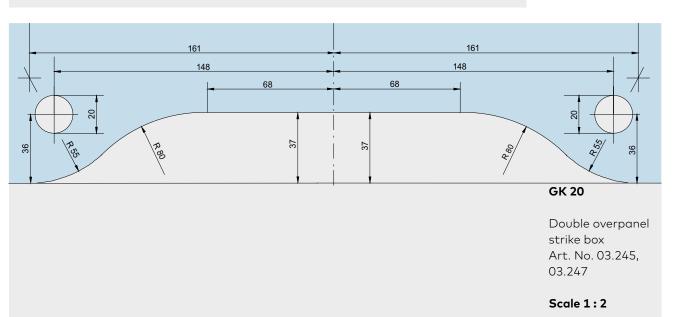


#### GK 40 (PT 40)

Corner overpanel strike box Art. No. 03.250,

Scale 1:2

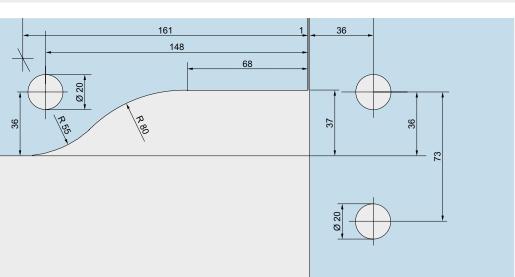



#### US 20, GK 50


Centre lock Art. No. 03.215, 03.289, 03.290, 03.345 and strike box for centre lock Art. No. 03.224

SG

#### Scale 1:2

Glass preparation


## Glass preparation for corner, centre locks and strike boxes, requiring drilled holes



#### Corner locks

Art. No. 05.100, 05.103, 05.105, 05.116, 05.117, 05.118, 05.119

Scale 1:2




#### Strike boxes

Art. No. 05.108, 05.109

Scale 1:2

## Glass preparation for centre locks and strike boxes, requiring drilled holes



#### Centre locks


Art. No. 05.250, 05.251, 11.216, 11.217, 11.220, 11.221, 11.224, 11.225

SG

#### Strike boxes for centre locks

Art. No. 05.252, 05.253, 11.206, 11.207


Scale 1:2

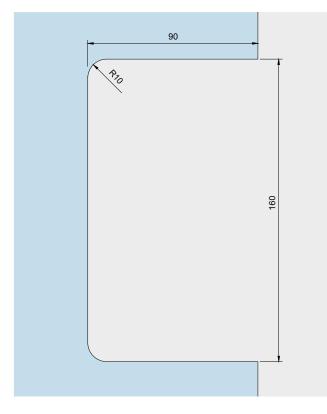

## Centre locks with nightlatch function, hook bolts and strike boxes

Art. No. 05.200, 05.201, 05.202

Scale 1:2

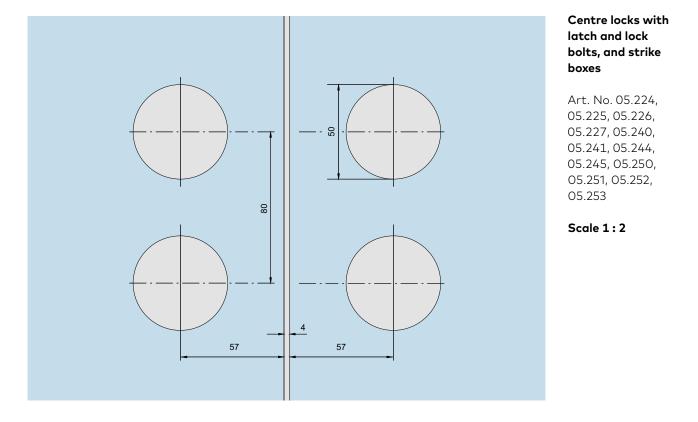

## Space for your notes

## **Content** Wall connection profile

178 General information
179 Components
188 Accessories
212 Safety-related information



# Wall connection profile

### Wall connection profiles

Consisting of: base profile, with bore holes (every 300 mm), incl. clamping parts with screws and gasket strips.

#### Application:

e. g. all around frame system for thoughened glass assemblies, with fittings on sides and ceiling. The safety type prevents free hanging glass elements from falling down, by fixing the clamping fitting through glass holes. 15 kg load for each clamping part, torque for fixing screws 15 Nm (M 6 = Allan key size 4).

	Product description	Glass thickness	Art. No.
	Base profile	8 mm	07.042
	6,000 mm Stock length	10 mm	07.001
Base profile		12 mm	07.002
		12.7 mm	07.045
		13.5 mm	07.046
		15 mm	07.047
		17 mm	07.048
		19 mm	07.049
	Fixed length	8 mm	07.050
Clamping part		10 mm	07.051
		12 mm	07.052
		12.7 mm	07.055
ź ż		13.5 mm	07.056
		15 mm	07.057
		17 mm	07.058
		19 mm	07.059
	Clamping part	8 mm	07.043
	(addition/replacement)	10 mm	07.004
32	60 mm long,	12 mm	07.005
	with screws and gasket strips	12.7 mm	07.085
		13.5 mm	07.086
		15 mm	07.087
		17 mm	07.088
		19 mm	07.089

Safety type	Product description	Glass thickness	Art. No.
Base profile as safety type	Base profile as safety type 6,000 mm Stock length	8 mm 10 mm	07.060 07.061
	<b>Fixed length</b> Weight in kg/m: Aluminum 1.200	8 mm 10 mm	07.066 07.067
Clamping part for safety type	<b>Clamping part (addition/replacement)</b> <b>for Safety type</b> 60 mm long, with screws and gasket strips	8 mm 10 mm	07.063 07.064
9 150* ±0.5 300 ±0.5 300 ±0.5	Glass preparation for Safety type		
*If glass and profile are aligned.			
n * 300 + 150 ±0.5			

Initial reference edge

	Product description	Glass thickness	Art. No.
39.5	Clip on cover profile brass, stainless steel, satin and stainless steel polished door available Weight in kg/m: Aluminum 0.216 Stainless steel 0.366 6,000 mm stock length fixed length		07.003 07.053
	End cap		
64	Weight in kg/pc: Aluminum 0.003 Brass 0.090 Stainless steel 0.090	8 mm and 10 mm	07.007
32/35,5/41 due to glass thickness	Aluminum0.003Brass0.010Stainless steel0.010	12–13.5 mm	07.044
o aso unckness	Aluminum 0.003 Brass 0.011 Stainless steel 0.012	15–19 mm	07.065
	Filler block, 10 x 12 mm		
10 07.006	6,000 mm stock length fixed length Weight in kg/m: Aluminum 0.325		07.006 07.054
77	<b>U-profile</b> 20 x 20 x 20 x 2 mm		
3	6,000mm stock length fixed length Weight in kg/m: Aluminum 0.304		07.092 07.093
	<b>U-profile</b> 30 x 20 x 30 x 2 mm 6,000 mm stock length fixed length Weight in kg/m: Aluminum 0,304		07.097 07.096

### Space for your notes

## **Content** MR 22/MR 28

## 184 Components

## 188 Accessories

212 Safety-related information

# MR 22/MR 28

### Wall connecting frame system MR 22 and MR 28

Comprising a frame profile (series-drilled), a clamping profile and two contact rubber extrusions (PVC, grey).

These decorative and elegant frame solutions are characterised by their remarkably easy installation. The viewface width in the case of the MR 22 is a mere 22 mm and in the case of the MR 28 it is just 28 mm. Suitable for glass thicknesses of 8 and 10 mm. No load transfer by the profiles. Can be readily

#### MR 22

max. glass dimensions: height: 2,500 mm width: 1,000 mm removed and re-installed elsewhere. The MR 28 features an additional screw-fixing channel for connecting angle brackets and enables combination with mullion profiles for the vertical connection of several glass panels and also abutment to frame systems AT 44 and AT 50.


#### **Applications:**

e.g. surrounding frame for toughened glass systems for fixing to walls and ceilings

#### MR 28


max. glass dimensions: height:2,800 mm width: 1,000 mm



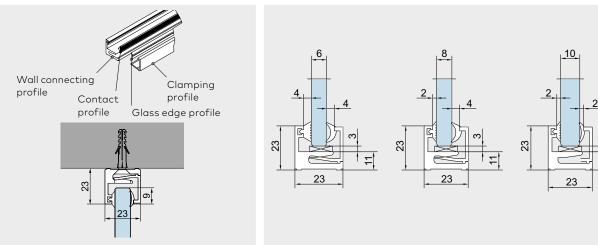


Features and data	Art. No.
MR 22 in 6,000 mm stock length, without PVC profile Weight in kg/m: Aluminum 0.648	07.240
MR 22 in fixed length Weight in kg/m: Aluminum 0.648	07.250

Base profile MR 28




#### Attention:

Profiles are only delivered with straight cuts. Allowances in lengths of profiles to ensure producibility of bevel cuts have to be planned by the customer. The georgian bar profile must be prepared in addition on both sides. Please consider installtion instruction

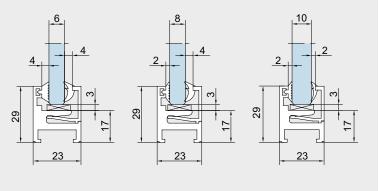

Features and data	Art. No.
MR 28 in 6,000 mm stock length, without PVC profile Weight in kg/m: Aluminum 0.802	07.241
MR 28 in fixed length Weight in kg/m: Aluminum 0.802	07.251
Georgian bar profile MR 28 in 6,000 mm stock length, without PVC profile Weight in kg/m: Aluminum 0.542	07.242
Georgian bar profile MR 28         in fixed length         Screws for fixation at MR 28 base profile         are nor included in delivery.         Recommendation: counter sunk screw         4.2 mm x 32 mm         Weight in kg/m:         Aluminum       0.542	07.252

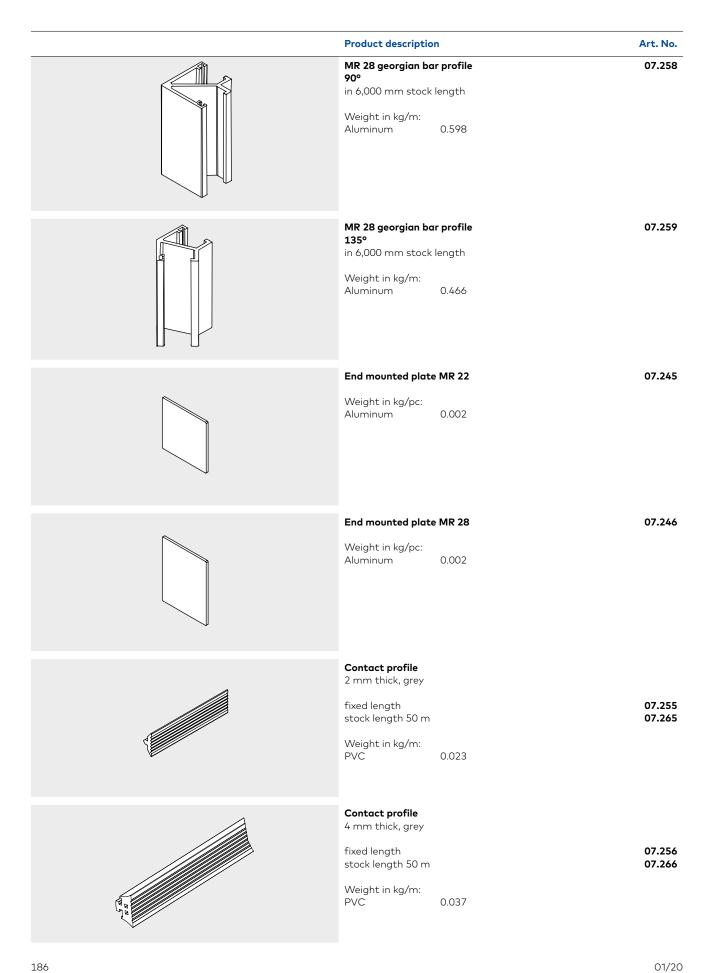

	Product description	Art. No.
	Glass wedge profile 2 mm thick, grey fixed length stock length 50 m Weight in kg/m: PVC 0.016	07.253 07.263
	Glass wedge profile4 mm thick, greyfixed lengthstock length 25 mWeight in kg/m:PVC0.034	07.254 07.264
DIN 7991 M 5 × 8	Corner connection set MR 28, 4 pieces per set8 screws DIN 7991 M 5 x 8 included in scope of deliveryWeight in kg/pc: Aluminum0.0021	07.247
	Corner connection for MR 28 georgian bar profil 90° 2 grub screws DIN 916 M 4 x 5 included in scope of delivery	07.248
	Corner connection for MR 28 georgian bar profil 135° 2 grub screws DIN 916 M 4 x 5 included in scope of delivery	07.249

# **Content** Accessories

191	Top bearings, pivots
193	Floor bearings, lock keeper plate, floor sockets
194	Wall connection and cylinders
195	Profiles for UNIVERSAL
196	Gaskets
198	Clamping fittings
200	Accessories for door closer
204	Handle bars, door knobs, recessed pull grips
212	Safety-related information



# Accessories


### Perfection in detail

Original accessories for patch fittings, door rails and locks, matched to the dormakaba product range, are available.

They ideally complement the range of dormakaba hardware to optimise the technical excellence and cost effectiveness of toughened glass systems of all types. Aside from functional components such as special floor pivots – including models for wet rooms – dormakaba also offers a choice of security-relevant options. Their installation further enhances the exceptional functional efficiency, reliability and long service life expected of dormakaba systems.

# Top bearing, pivots for UNIVERSAL, BEYOND, EA, TP/TA, MANET

**Advisory:** Please note that the upper pivots for UNIVERSAL and those for MUNDUS are not mutually compatible. The spigot diameters of the MUNDUS fittings vary.

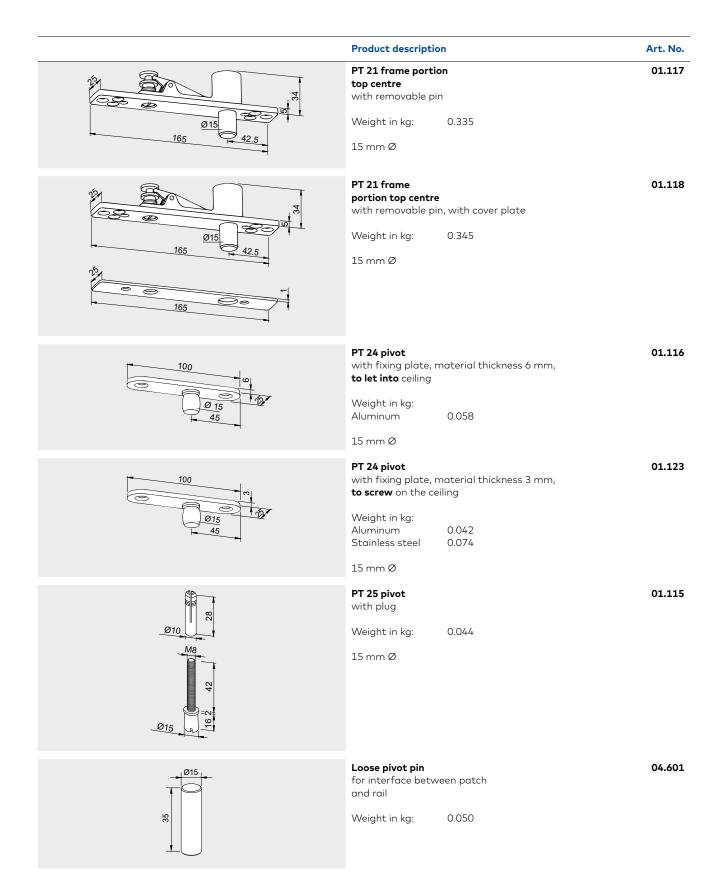

	Product description	Art. No.
M 28 N N N N N N N N N N N N N N N N N N N	<b>Top pivot bearing,</b> brass, nickel plated, for installation in frame or ceiling for 15 mm Ø pivot pin Weight in kg: 0.065	01.129
Ø 25 9 25	<b>Top pivot bearing</b> aluminum, for installation in frame or ceiling for 15 mm Ø pivot pin Weight in kg: 0.018	01.130
	<b>Top pivot bearing</b> with steel fixing plate, for 15 mm Ø pivot pin Weight in kg: 0.160	01.131
	<b>Top pivot bearing</b> with aluminum fixing plate, for 15 mm Ø pivot pin Weight in kg: 0.099	01.132


### Floor bearing, lock keeper plate, floor socket for UNIVERSAL, BEYOND, EA, TP/TA, MANET

			Product description	Art. No.
5	92 Ø 14 40 25	▼F.F.L. 24 15	Floor pivot bearingwith round pivot 14 mm Ø, and cover plate;height adjustable by 5 mmmax. door weight 100 kgWeight in kg:Aluminum0.155Brass0.170Stainless steel0.169	01.106
			<b>Floor pivot bearing</b> with round pivot 14 mm Ø and pin 24 mm Ø max. door weight 100 kg Weight in kg: 0.078	01.107
\$9 <u>9</u>		¥ F.F.L.	Floor bearing with profile spindle (longer spindle on request), max. door weight 200 kg Stainless steel, max. door weight 200 kg Weight in kg: 0.254	04.602 04.603
			Floor pivot bearing for damp environments, with insert for UNIVERSAL PT 10 for mounting onto floor surface max. door weight 80 kg Weight in kg: 0.195	01.137
32.0	94 Ø15.5 55		<b>Lock keeper plate,</b> stainless steel, two parts, adjustable ± 5 mm Weight in kg: 0.048	05.190
<u>Ø15.5</u>	Ø16	Ø 40 Ø 15.5	<b>Floor socket,</b> zinc coated brass for lock bolt Weight in kg: 0.020	05.192
<u>915</u>	40		Floor socket, aluminum, with spring and plastic stopper, dirt protection Weight in kg: 0.026	05.193
05.192	05.193	05.194	<b>Eccentric socket,</b> eccentric, zinc coated brass, with adjustable plastic socket insert Weight in kg: 0.020	05.194

### Wall connection and cylinders for UNIVERSAL, BEYOND, EA, TP/TA, MANET

	Product description	Art. No.
No or B.5	Fixing plate         for overpanel patches from UNIVERSAL, EP and EA         program         Weight in kg:         Aluminum       0.019         Brass       0.045         Stainless steel not available,         satin chrome on brass supplied.	01.127
	Wall anchor for overpanel patches from UNIVERSAL, EP and EA program with thread M 8 Weight in kg: 0.040	01.133
	Threaded rod for overpanel patches from UNIVERSAL, EP and EA program M 8 with plug Weight in kg: 0.032	01.134
	<b>Profile cylinder</b> length 61 mm, differently keyed, with Logo <b>Profile cylinder</b> length 61 mm, equally keyed, with Logo	05.001 05.002
	Half-profile cylinder length 31 mm, differently keyed, with Logo Half-profile cylinder length 31 mm, equally keyed, with Logo	05.003 05.004

### **Profiles for UNIVERSAL**

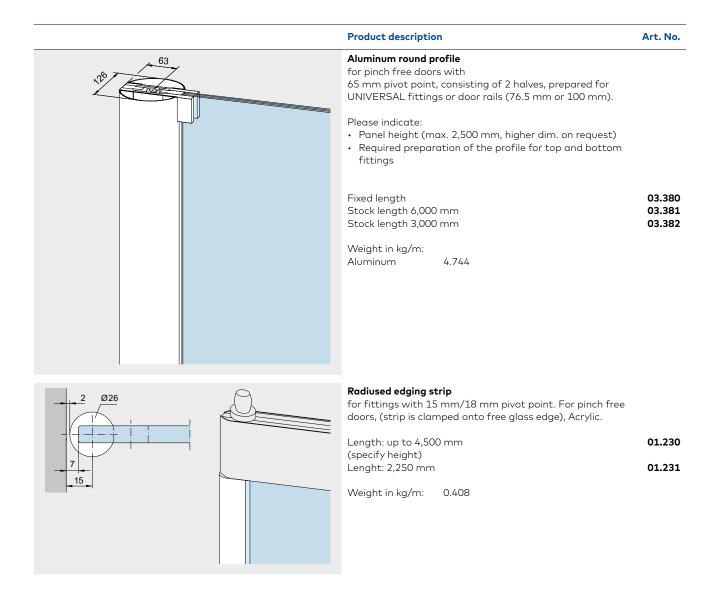


### **Gasket sets for UNIVERSAL**

Product description	Art. No.	Product description	Art. No.
Gasket sets for 12 mm glass thickness		Gasket sets for 8 mm glass thickness	
for PT10/20/22/29/30/GK30	03.900	for PT10/20/22/29/30/GK30	03.920
for US 10/20/GK50	03.901	for US 10/20/GK50	03.921
for PT40/41/42/GK40/41/42	03.902	for PT40/41/42/GK40/41/42	03.922
for PT51	03.903	for PT51	03.923
for PT60/61/62	03.904	for PT60/61/62	03.924
for PT70/71	03.905	for PT70/71	03.925
for PT80/81	03.906	for PT80/81	03.926
for PT80 semi-high	03.907	for PT80 semi-high	03.927
for PT90/91	03.908	for PT90/91	03.928
for sidelight connector 01.153	03.909	for sidelight connector 01.153	03.929
for patch fitting 03.198	03.910	for patch fitting 03.198	03.930

Note: All fittings with a 15 mm pivot point are technically only designed for 10 mm glass thickness !


### Space for your notes

### **Clamping fittings**

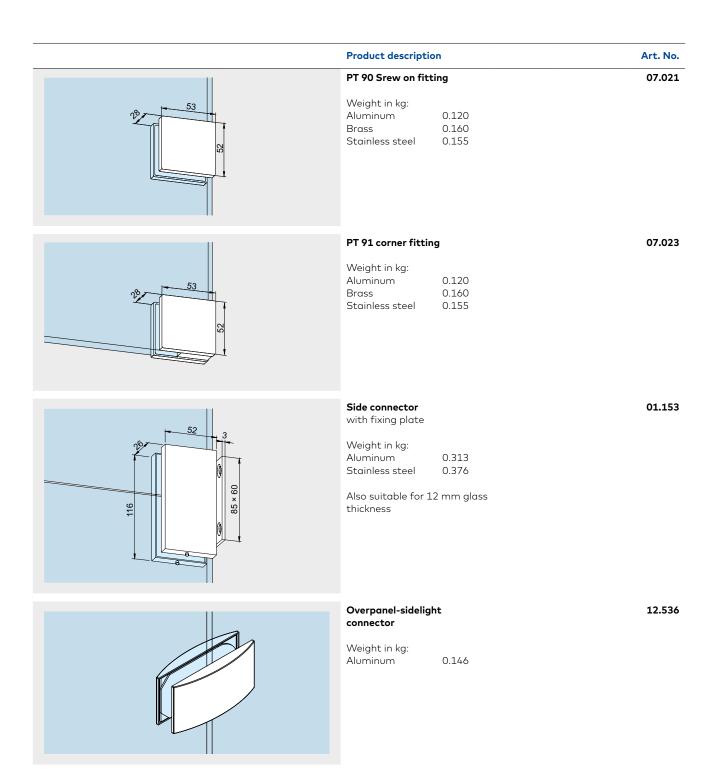




### Usage and assembly of fins





Fin fittings and corner connectors do not have a supporting structure. Overpanels, side-lights and fins have to be fixed securely to the ceiling by dormakaba wall connecting profiles or similar systems.


The need for stiffeners and the requisite glass thickness must be specified by a properly qualified structural engineer.

### Accessories for door closer TS 73 V

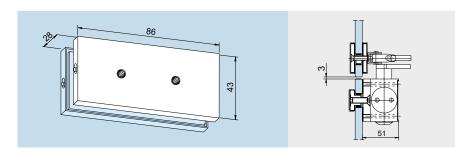

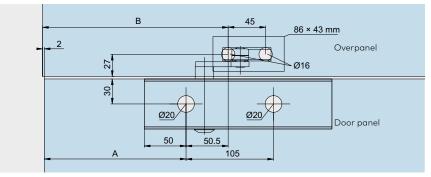

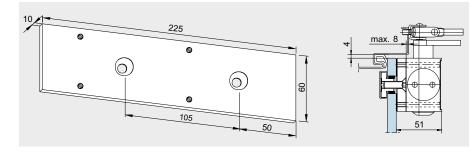

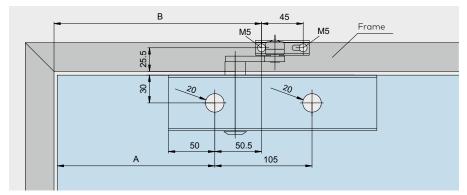

#### Fixing plate

for TS 73 V, closer arm for overpanel

#### Art. No. 12.330

Weight in kg: Aluminum 0.132

Pivot point fitting	Α	В
EA (AT)	195	248
UNIVERSAL/EP/ MUNDUS	245	298
STUDIO/JUNIOR	170	223
UNIVERSAL Arcos	262	315

#### **Fixing plate**


225 mm, for TS 73 V


#### Art. No. 12.335

Weight in kg Aluminum 0.289

Pivot point fitting	Α
EA (AT)	195
UNIVERSAL/EP/ MUNDUS	245
STUDIO/JUNIOR	170
UNIVERSAL Arcos	262

### Accessories for door closer TS 92

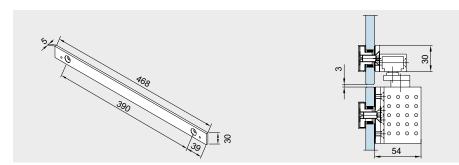

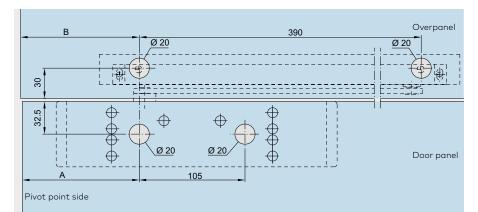





for TS 92, slide channel for overpanel


#### Art. No. 12.332

Weight in kg Aluminum 0.265

Drehpunkt-Beschlag	Α	В
EA (AT)/EP	200	202
UNIVERSAL/ MUNDUS	250	252
STUDIO/JUNIOR	148	250
UNIVERSAL Arcos	265	267

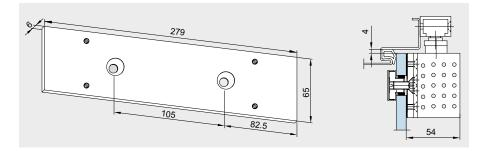

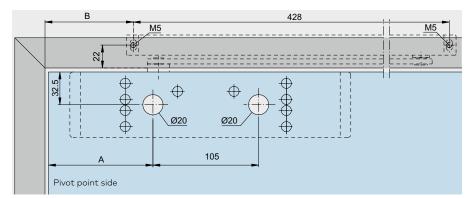



#### Fixing plate

279 mm, for TS 92

#### Art. No. 12.334


Weight in kg: Aluminum 0.290

Drehpunkt-Beschlag	Α
EA (AT)/EP	200
UNIVERSAL/ MUNDUS	250
STUDIO/JUNIOR	148
UNIVERSAL Arcos	265

#### Saddle plate

and door closer TS 92 are available at dormakaba, Ennepetal, or at special suppliers for building hardware.

### Door closer TS 97

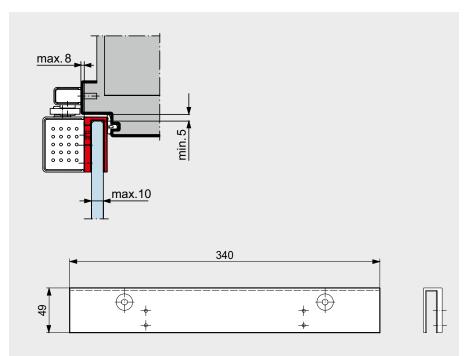

#### TS 97 including saddle plate

For connecting the closer to toughened glass doors – no glass recess machining or drilling required. The TS 97 with this special glass fixing bracket should be used with STUDIO Arcos and OFFICE Arcos / OFFICE Junior hinges.

For more information please see our technical brochure TS 97.

### Space for your notes

### Pull handles, door knobs and recessed pull grip

The pull handle/knob system is designed for glass of 8, 10 and 12 mm thickness.

The pull handles can be fixed to both sliding and pivoting (swing) doors on one face using the appropriate connectors or on both faces by through-bolting (back-to-back arrangement).


Due to a flat structure recessed pull grips are also suitable for sliding doors.

The single-point fixings and through bolts are included as standard equipment in the scope of supply.

The pull handles can be fitted horizontally, vertically or in a handrail arrangement.




### **Pull handle pairs**

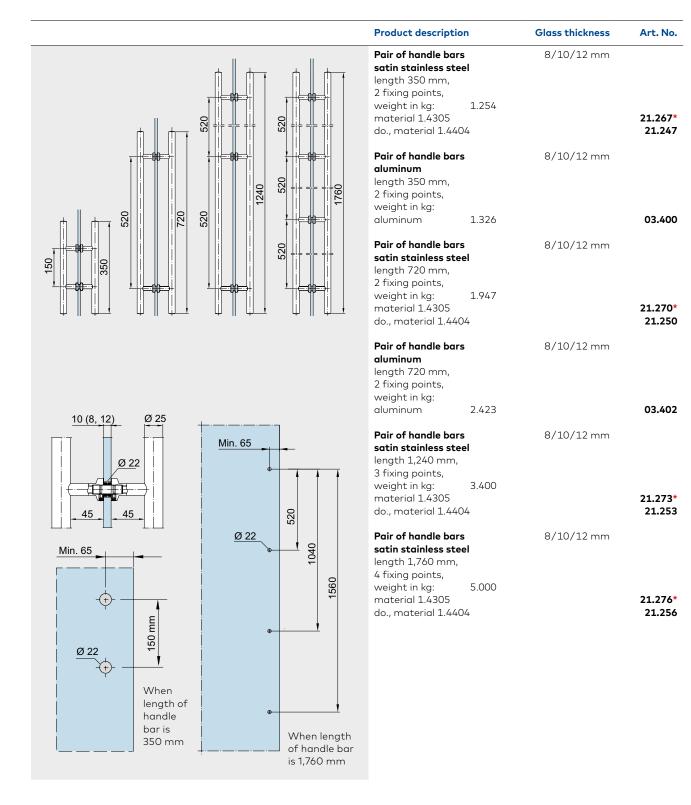



\* Conversion sets for back to back pull handles for timber doors resp. other glass thicknesses see unter "Spacing adjustment for pull handles and door knobs", page 207.

### Pull handles single

	Product description	Glass thickness	Art. No.
	Pull handles with single-point fixings, countersunk Edelstahl Pull handle 350 mm with 2 fixings, material 1.4305 do., material 1.4404 Pull handle 720 mm with 2 fixings, material 1.4305 do., material 1.4404 Pull handle 1,240 mm with 3 fixings, material 1.4305 do., material 1.4404 Pull handle 1,760 mm with 4 fixings, material 1.4305 do., material 1.4404	8/10/12 mm	29.268 29.269 29.271 29.272 29.274 29.275 29.277 29.278
ST ST	Pull handles with single-point fixings, clamping disc Pull handle 350 mm with 2 fixings, material 1.4305 Pull handle 720 mm with 2 fixings, material 1.4305 do., material 1.4404 Pull handle 1,240 mm with 3 fixings, material 1.4305 Pull handle 1,760 mm with 4 fixings, material 1.4305 do., material 1.4404	8/10/12 mm	21.240 21.241 21.281 21.242 21.243 21.283








handle and door knob, one

side fixing



Glass thickness Cylindrical bore on pair of pull handles and door knobs, back-to-back


ø 22

### Spacing adjustment for pull handles and door knobs


	Product description	Door thickness	Art. No.
MT-BEED	<b>Conversion set 1 for glass doors,</b> pair of pull handles / knob back-to-back without distance washer with 1 distance washer with 2 distance washers	13.5 – 21.5 mm 13.5 mm 15 mm 17.5 mm	21.285
Distance washer 2 mm	with 3 distance washers with 4 distance washers	19 mm 21.5 mm	
OT ODDEDD	<b>Conversion set 2 for timber doors,</b> pair of pull handles / knob back-to-back without distance washer with 1 distance washer with 2 distance washers with 3 distance washers with 4 distance washers	20 – 40 mm 20 mm 25 mm 30 mm 35 mm 40 mm	21.286
Distance washer 5 mm			
	<b>Conversion set 3 for glass / timber</b> <b>doors*,</b> pair of pull handles / knob back-to- back, countersunk 15 - 40 mm glass / timber thickness		21.287
Set 3 Set 4	<b>Conversion set 4 for glass / timber</b> <b>doors*,</b> pair of pull handles / knob back- to-back, clamping disc 15 - 40 mm glass / timber thickness		21.288
	<b>Conversion set 5 for glass doors*,</b> recessed pull grip 13.5 - 21.5 mm glass thickness		21.295
	<b>Conversion set 6 for timber doors*,</b> recessed pull grip 20 - 40 mm timber thickness		21.296
Set 5 Set 6			
	<b>Conversion set 7 for glass / timber</b> <b>doors*,</b> for pull handles fixed on both sides to pull handle fixed on one side, countersunk 8 - 40 mm glass / timber thickness 1 set per pull handle fixing		21.297
Set 7 Set 8	<b>Conversion set 8 for glass / timber</b> <b>doors*</b> , for pull handles fixed on both sides to pull handle fixed on one side, clamping disc 8 - 40 mm glass / timber thickness 1 set per pull handle fixing		21.298

\*Not suitable for Arcos pull handles 26.500 / 26.510


### Pair of pull handles

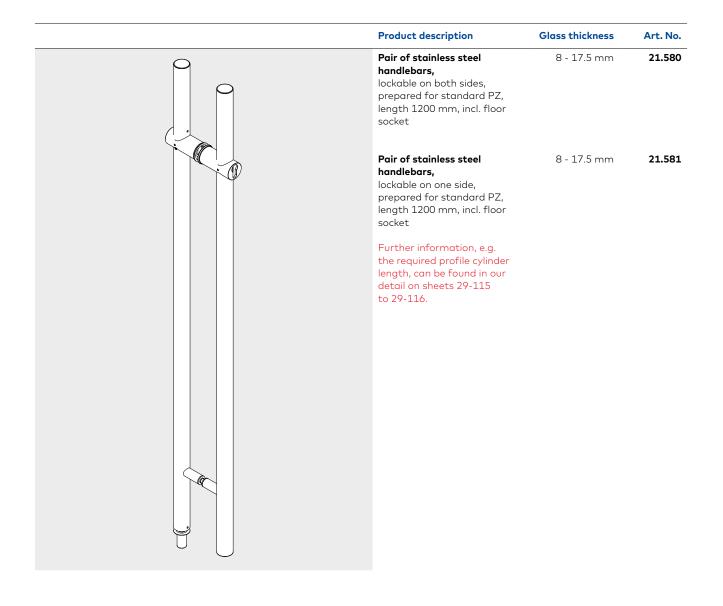

### Arcos pull handle

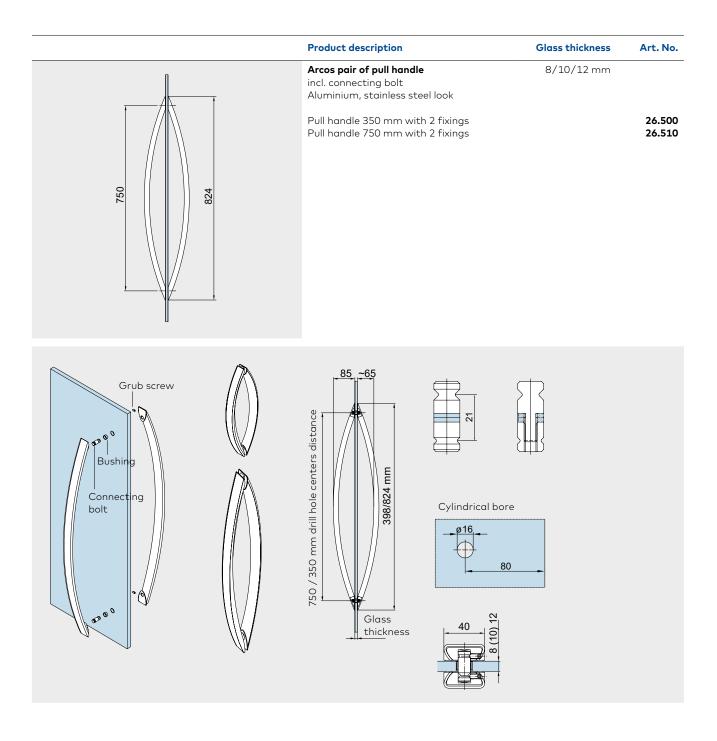

### Handle bars

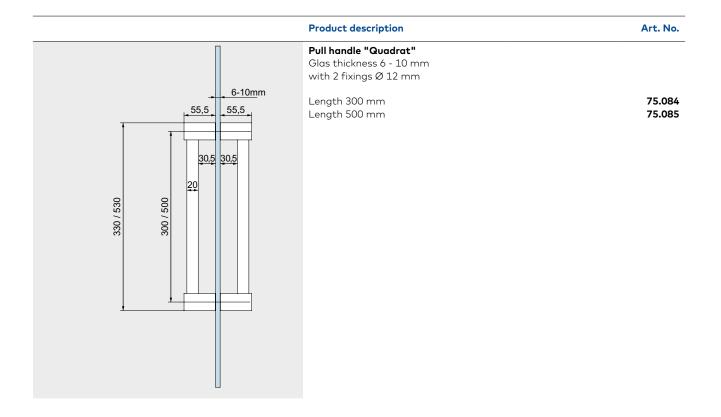

### Recessed pull grips and door knobs

	Product description	Glass thickness	Art. No.
Ø 38 mm Glass bore	<b>Recessed pull grip</b> ∅ 50 mm	8/10/12 mm	21.290
Ø 50 mm Glass bore	<b>Recessed pull grip</b> Ø 60 mm <b>Recessed pull grip with grip hole</b> Ø 60 mm	8/10/12 mm 8 mm 10 mm 12 mm	21.291 21.292 21.293 21.294
Ø 50 mm Glass bore	<b>Recessed pull grip</b> aluminum to be glued onto the glass Weight in kg: 0.072		07.200
$\emptyset$ 20 mm Glass bore	<b>Door knob,</b> aluminum Weight in kg: 0.400		07.201
Glass thickness	<b>Door knob one side fixing</b> Door knob with single-point fixing, countersunk Door knob with single-point fixings, clam- ping disc	8/10/12 mm	21.422 21.426
Glass thickness Glass thickness Glass thickness Glass thickness Glass thickness (Single-point fixing clamping disc (Glass preparation please see under "pull handles single", page 206)	Door knob back-to-back	8/10/12 mm	21.423

Note: To ensure better load transmission, please use a pull handle in conjunction with the DORMOTION damping unit.

### Safety-related information

### Important safety-related information for the mounting and use of dormakaba glass fittings.

(Follow these instructions in addition to the mounting and operating instructions in order to avoid damage of product and damage to person or property.) Important: All users have to be informed about relevant points mentioned in these safety-related information and the mounting and operating instructions!

#### **General information**

- 1. dormakaba recommends the use of TSG-H (heat-stored tempered safety glass) according to DIN EN 12150-1.
- 2. dormakaba glass fittings are not suitable for outdoor installation.
- 3. dormakaba glass fittings are not suitable for rooms where chemicals (e.g. chlorine) are used, e.g. swimming pools, saunas and brine baths.



- 4. Sliding panels must not be moved faster than at walking speed and must be stopped by hand before reaching the end positionwill be.
- 5. Pivoting panels must not be thrown too hard. If there is a risk of over-turning, this must be prevented by a door stop.

#### Mounting

- 1. Only properly qualified and specially trained staff is authorised to mount dormakaba glass fittings.
- 2. Never use glass with conchoidal fractures and/or damaged edges.
- 3. Due to crushing hazards among others in the area of the secondary closing edge – and possible injury caused by breakage of glass during mounting, corresponding protective clothing (especially gloves and protective goggles) is required.
- 4. Clean clamping area with fat solvent (standard commercial cleaning agent) before mounting the glass fitting.
- 5. Never use clamping shoes on structured glass surfaces (except on satined glass) or glass of heavily varying thickness unless with a corresponding levelling layer.
- 6. Never use clamping shoes on self-cleaning coatings.
- 7. When adjusting glass elements, always stick to the required clearance for the respective fitting. Adjust clearance so that the glass does not touch hart components such as glass, metal or concrete.
- 8. Make sure not to use excessive force when installing the glass (avoid local stress resulting from very tight screws).

#### Maintenance

Check fittings at regular intervals for proper positioning and smooth running and door for correct adjustment. Especially highly-frequented door systems require inspection by properly qualified staff (specialised companies or installation firms). Immediately replace damaged class elements (no glass flaking and/or conchoidal fractures)!

#### General care instructions

The surface finishes of the fittings are not maintenance-free and should be cleaned according to their material and design.

- For metallic surfaces (anodised finishes, stainless steel) please use appropriate cleaning agents without abrasive additives only.
- For varnished surfaces please use appropriate solvent-free cleaning agents only.
- Brass surfaces (without surface protection) have to be treated with an appropriate maintenance agent on occasion, to avoid tarnishing.

### For practical planning, please use our drawings dormakaba "The Detail".

The printed colours indicating the surface finishes are not 100 % true, but do provide a useful guide. Statements made with regard to the nature or use of the products are for the purposes of descriptions. Assent with regard to the existence of particular properties or particular uses always requires special written agreement. Pictures may show special designs which are different to the standard scope of delivery.

Subject to change without notice.

### **Our products**



#### Interior Glass Systems

System solutions made from glass for a wide range of everyday and office applications



#### Mechanical Key Systems

Systems that enable access rights and key control to all rooms within the premises



#### Lodging Systems

Hotel locks and locking systems as well as access management solutions for holiday homes



#### Electronic Access & Data

Electronic access control and workforce management for efficient access management, security and data collection



#### Entrance Systems

Automated access solutions for convenient access to buildings



#### Door Hardware

Solutions for residential or commercial projects



#### Safe Locks

Security locks for preventing unauthorized access to goods, valuables, information or hazardous substances



#### Services

Tailor-made services and customized maintenance for long-term functional integrity of access and security solutions

#### dormakaba UK & Ireland

E: info.gb@dormakaba.com

Wilbury Way, Hitchin Hertfordshire SG4 0AB T: +44(0)1462 477600 F: +44(0)1462 477601