



BOOST UP YOUR JOURNEYS!

MotoVolt

JUMP STARTER

Power Up Drained Car Battery



USER MANUAL


Welcome

Thank you for purchasing the Ambrane MotoVolt Jump Starter. We recommend you to read the instruction manual carefully before using the product.

Package Contents

- 1 N MotoVolt Jump Starter
- 1 N User Manual
- 1 N Jumper Cable
- 1 N Charging Cable
- 1 N Rating Card
- 1 N Safety Instructions Card

Product Overview

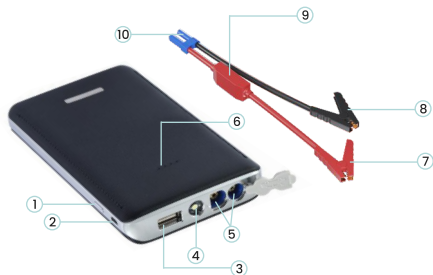

1. Power Button
2. Charging Port
3. USB A Port
4. LED Torch & SOS
5. Jumper Socket
6. LED Indicator
7. Battery Clamp (+)
8. Battery Clamp (-)
9. Circuit Protection Box
10. Connector Socket

Product Specifications

- Battery: 7200mAh
- Battery Type: Lithium Polymer
- Battery Life: 200 cycles
- Input: 5V/1A
- Starter Output: EC 15V/200A (Max)
- Weight: 260g
- Dimensions: 145 * 80 *20 mm
- Starting Current: 200A
- LED Torch: Yes
- Indicators: 4 LED Lamps Indicators
- Premium Plastic Leather Finishing Design
- Suitable for Petrol vehicles up to 5.0-litre and Diesel up to 2.4-litre Hatchbacks, Sedan, SUVs, Bikes
- Portable in size, easy to store and carry

How To Charge The Jump Starter

Use the charging cable from the package, insert the Micro connector of the cable into the Micro USB charging port and the USB port into the charging source.

| Power Indicator | One Light ON | Two Lights ON | Three Lights ON | Four Lights ON |
|-------------------|--------------|---------------|-----------------|----------------|
| Power of MotoVolt | <25% | 25-50% | 50-75% | 100% |

Operating Instructions

Jump Starting Process: BEFORE YOU JUMP START!

1. Before you attempt to jump-start your vehicle, ensure your vehicle is in Park.
2. Unplug all USB charging cables.
3. Ensure manual transmission vehicles are at Neutral with the Emergency Brake engaged.

How To Jump Start The Vehicle

CAUTION: Make sure that the battery power level on MotoVolt has at least 3 solid LED lights before using it to jump-start your vehicle.




Check that the battery power level has at least 3 solid lights.




Remove the vehicle key from the ignition.



Insert the blue plug of the cable into the MotoVolt input socket. Make sure the blue plug is fully secured into the socket. White LED indicator lights should begin flashing on the MotoVolt.



Connect the Red battery clamp of the cable onto the positive "+" terminal of the vehicle battery & Black battery clamp of the cable onto the negative "-" terminal of the vehicle battery.



Put the vehicle key back into the ignition and switch it to the start position.



Attempt to start the vehicle. Do not turn the ignition for more than 3 seconds at a time. Allow the MotoVolt to cool down for 2 minutes between each start attempt.



As soon as the vehicle has started, immediately unplug the blue plug. Then, remove the battery clamps.

Leave the vehicle running for a while.



After jump-starting a vehicle, it is recommended to recharge the MotoVolt before reuse.

IMPORTANT SAFETY INSTRUCTIONS

WARNING: Keep the device clear of fire and water.

WARNING: Shock Hazard. Keep away from children.

Do NOT insert foreign objects into the smart jump starter cable port, the input ports or output ports. Do NOT expose this device to water, rain, snow, condensation or spray. Do NOT open this device to replace the internal battery. There are no user-replaceable parts inside this device.

WARNING: Explosion Hazard. Do NOT use this product where there are flammable fumes or gases, such as in the bilge of a boat or near propane tanks. Do NOT use this device in an enclosure containing automotive-type lead-acid batteries.

WARNING: Fire Hazard. Do NOT crush or puncture this device. Always disconnect the smart jump starter cables from this device after each use and store them separately.

This device is designed for short-term operation only.

CAUTION: Operating Temperature. Do NOT expose this device to temperatures over 65°C or below -15.5°C. Operation in these conditions may reduce internal battery capacity and shorten battery life or cause damage to the unit.

WARNING: Vehicle Battery Precautions. Follow all instructions published by the battery manufacturer and the manufacturer of the equipment in which the battery is installed. Make sure the area around the battery is well-ventilated. Never smoke or allow a spark or flame in the vicinity of the engine or batteries. Be careful not to drop a metal object on the battery or allow a metal tool to simultaneously touch the positive and negative cable ends or battery terminals. Remove personal metal items such as rings, bracelets, necklaces, and watches when working with batteries.

WARNING. Using this Device. Before attempting to start a vehicle, be sure the blue plug of the Smart Jump Starter Cables is firmly secured into the Smart Jump Starter Cable Input Socket and be sure that the battery clamps have a good connection with the proper battery terminals. Clean rusted or dirty terminals before attempting to jumpstart the vehicle.

WARNING. Turn the ignition for 3 seconds only when attempting to start the vehicle. Turning the ignition for longer than 3 seconds at a time may cause damage to this device. Allow the device to cool down for 2 minutes in between start attempts. If the vehicle does not start after 3 attempts, refrain from using the jump starter and check the vehicle for other problems.

WARNING. Remove the jump starter from the vehicle battery within 30 seconds of successfully restarting. To do so, remove the Smart Jump Starter Cables from the Jump Starter. Then remove the Smart Jump Starter Cables from the battery terminals.

WARNING. This product is not a toy and is not intended for use by children.

WARNING. Do not attempt to modify or disassemble this product.

WARNING. Only use the provided charging cords with this product.

WARNING: Disposal of this Device. This device contains a non-replaceable Lithium Polymer battery. It is not user-replaceable. The battery must be disposed of properly when it no longer holds a charge. This product should be recycled or disposed of as per state and local guidelines.

Warranty Card and Terms & Conditions

- **NOTE:** For valid warranty claim, all information on the warranty certificate has to be completed and presented along with the original invoice.
- All warranty information, product features and specifications are subject to change without prior notice.
- All matters are subject to Delhi Jurisdiction.

Customer's Name: _____

Contact Number: _____

Customer's Address: _____

Model No.: _____

Purchase Date: _____

Invoice Number: _____

Dealer's Stamp: _____

Ambrane MotoVolt Jump Stater & Jumper Cable comes with 180 days warranty from the date of purchase.

- Warranty can not be claimed if the product is damaged by wrong operation or force majeure.
- Accessories supplied with **Ambrane MotoVolt Jump Stater** are not covered under the warranty.

CUSTOMER CARE:

Ambrane India Pvt. Ltd.

224, Second Floor, D-Mall, Netaji
Subhash Place, Delhi; India - 110034

Contact No.: +91 1145911111,

E-mail: care@ambraneindia.com

Web: www.ambraneindia.com

Join the Ambrane Ally!

[@ambraneindia](https://www.instagram.com/ambraneindia)

