

 oneadaptr™

Instructions
Manual

80W USB-C LAPTOP & QC 3.0 CHARGER

EV-CHR-80B
EV-CHR-8UK



Product Features:

1. Supply power for laptops, smart phones and tablet PCs.
2. Adopt Qualcomm® Quick Charge™ 3.0 technology, offers fast and efficient charging technology.
3. Adapt USB PD2.0 technology, offers fast and efficient charging for USB-C devices.
4. Ultra slim and curved housing design, compact and portable.
5. Universal output voltage from 5V to 20V, automatic switching, just plug & go.
6. Innovation product, self-designing and produced with own patents.
7. Multiple safety protection: over current protection, over voltage protection, short circuit protection, over temperature protection.

Product specifications:


Model : EV-CHR-80B / EV-CHR-8UK
Input : AC 100-240V 50/60Hz 1.8A
Output : DC 5-20V 3.5A(Max)
Power : 80W (Max)
Size : 110 x 98 x 20 mm
Weight : 238 g

Package Contents:

1. Ultra-Slim Charger
2. AC Power Cord
3. Premium USB-C Charging Cable
4. Quick Start Guide




Product Diagram:

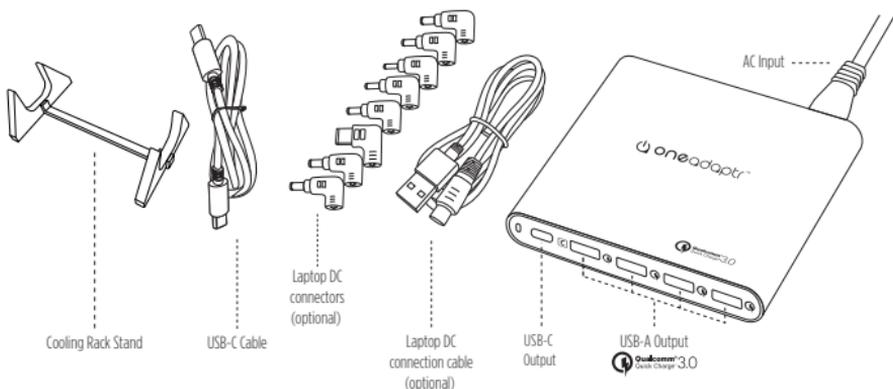



Operation Instruction:

1. When you want to charge or supply power to laptop, connect the AC plug into the wall socket (picture A). Choose the right DC connector, such as NO4, connect it with the Laptop DC connection cable (picture B), insert the joint DC tip to the laptop then it can be used. (picture C)

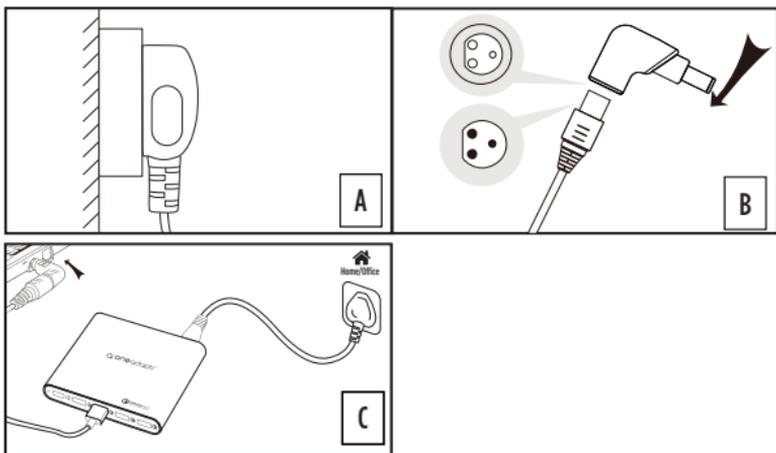

Operation Instruction:

2. When you want to charge for your USB-C devices, connect the USB-C cable into the USB-C output port of adapter and insert the other end of the USB-C cable into the power port of your laptop computer. (as picture D)
3. When you want to charge for your USB devices, connect the USB cable to any of QC3.0 charging ports which offer fast and efficient charging technology for your smart phones and tablet PCs. (as picture E)

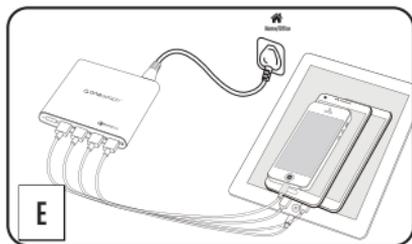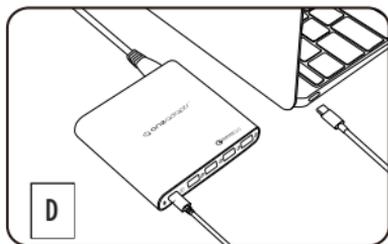

Caution: This adapter supports power 80W max. If your used power exceeds 80W, the adapter will occur to be over-load protection. When you re-plug the connection, then it will recover to normal work.

Optional laptop DC connectors list :

NO.	Output Voltage	Connectors spec.	Replacement
N01	10V	4.8 x 1.7 x 10.7 mm	ASUS: 9.5V 2.315A
N02	12V	4.8 x 1.7 x 10.7 mm	HP: 12V/2.5A, 12V/3.5A; ASUS: 12V/3A
N03	20V	5.5 x 2.5 x 10.7 mm	Lenovo: 20V2A, Delta: 20V1.2A, IBM: 20V2A, LG: 20V2A, MSI: 20V2A, LS 20V3.25A
N04	19V	4.8 x 1.7 x 10.7 mm	HP(COMPAQ): 18.5V/2.7A, 18.5V/3.5A, 18.5V/3.8A, 18.5V/4.9A; DELTA: 19V/2.64A; ASUS: 19V/2.64A; NEC: 19V/2.64A
N05	19V	4.0 x 1.7 x 10.7 mm	HP: 19V/1.58A
N06	16V	6.0 x 4.3 x 10.7 mm	SONY: 16V/3.42A, 16V/3.75A, 16V/4A, FUJITSU: 16V/3.36A, 16V/3.75A
N07	19V	5.5 x 2.5 x 10.7 mm	DELL: 19V/3.16A, 19V/3.42A; DELTA: 19V2.64A; TOSHIBA: 19V/3.16A, 19V/3.95A/19V4.74A; NEC: 19V/2.64A, 19V3.16A; GATEWAY: 19V/3.16A, 19V/3.42A
N08	12V	5.5 x 2.5 x 10.7 mm	LCD/ACER, BENQ: 12V/1A, 12V/2A, 12V/2.5A, 12V/3A, 12V/3.5A, 12V/4A etc.
N09	19.5V	6.0 x 4.3 x 10.7 mm	SONY: 19.5V/2.7A, 19.5V/3A, 19.5V/4.1A, 19.5V/4.7A; FUJITSU: 19V/3.16A, 19V/3.69A, 19V/4.22A
N11	19V	5.5 x 1.7 x 10.7 mm	TOSHIBA: 19V/3.95A; ACER: 19V1.58A, 19V3.16A, 19V/3.42A; LITEON: 19V3.42A, DELTA: 20V/3.5A
N12	12V	4.0 x 1.7 x 10.7 mm	SAMSUNG: 12V/3.5A; KODAK: 12V/2A etc.
N13	15V	6.3 x 3.0 x 10.7 mm	TOSHIBA: 15V/3A, 15V/4A, 15V/5A, 15V/6A; NEC: 15V4A, 15V/6A
N14	16V	5.5 x 2.5 x 10.7 mm	IBM: 1 6V/2.2A, 16V1.88A, 16V/3.36A, 1 6V/3.5A, 16V/4.5A DELTA: 15V1A, 16V3.5A, 16V4.5A, ACER: 16V3.75A
N15	16.5V	Magsafe 1	Apple: 16.5V 3.65A
N17	19V	4.8 x 1.7 x 10.7 mm (slim)	HP: 18.5V 4.9A, 19V 4.74A
N18	19V	5.5 x 2.1 x 10.7 mm	ACER: 19V/3.16A, 19V/3.42A, 19V/4.74A; LITEON: 19V/3.16A, 19V/3.42A; NEC: 19V/3.16A
N19	19V	5.5 x 3.0 x 10.7 mm	SAMSUNG: 19V/3.16A, 19V/3.75A, 19V/4.22A, 19V/4.74A
N20	19V	2.35 x 0.7 x 9 mm	Asus: 19V2.1A
N21	18.5V	Magsafe 1	Apple: 18.5V 4.6A
N22	19.5V	7.4 x 5.0 x 12.5 mm	DELL: 19.5V/3.34A, 19.5V/4.62A etc.
N23	18.5V	7.4 x 5.0 x 12.5 mm	HP(COMPAQ): 18.5V/3.5A, 18.5V/4.9A etc.
N24	20V	7.9 x 12 x 5.5 mm	IBM(LENOVO): 20V/3.25A, 20V/4.5A etc
N29	14.5V	Magsafe 1	Apple: 14.5V/3.65A etc.
N32	19.5V	4.8 x 1.7 x 28 mm	HP: Ultrabook etc.
N33	19V	3.0 x 1.0 x 8.0 mm	SAMSUNG: Ultrabook etc.
N34	19V	3.5 x 1.35 x 11 mm	Fujitsu tablet PC
N35	20V	11 x 5.6 x 11 mm square tip	LENOVO: 20V/2.25A, 20V/3.25A
N36	19.5V	4.5 x 3.0 x 11 mm	HP: 19.5V2.31A, 3.33A, and etc.
N37	20V	Magsafe 2	Apple: 20V 4.25A
N38	20V	Magsafe 2	Apple: 16V 3.65A
N39	20V	Magsafe 2	Apple: 14.85V 3.05A
N40	19V	4.0 x 1.35 x 11 mm	ASUS: 19V/2.37A, 19V/3.42A
N41	12V	Surface Pro4	Microsoft Surface: 12V/2.58A
N42	19.5V	4.5 x 3.0 x 11 mm	DELL: 19.5V/2.31A, 19.5V/3.33A
N43	20V	13 x 4.5 x 12 mm	LENOVO YOGA: 20V/2V, 20V/3.25A

Notes : All listing of brand names are registered trademarks of their respective companies.

Reminder:

1. This charger is not for ALL laptop models. The standard packing including 10pcs multi connectors.
2. If you need more information please confirm your device brand and model number with us.
3. Other extra DC connectors can be ordered separately.

Choose Fitting DC Connector Before Power

Each power connector with its own size, output voltage and compatible brand models.

- ✓ Right DC connector Size
- ✓ Right DC connector Output Voltage
- ✓ Right Laptop Brand / Model

Special Mark helps to plug the tip properly



Tip Number and Voltage is Molded on Each Connector





Notes:

Please check that the product's feature, connector, and voltage will be compatible with your laptops in accordance to your device's manual instruction. Please read this manual and its instructions carefully before use. We are not responsible for any damage caused by incorrect or reckless operation.

Important Safety Information:

This safety guideline is to help you operate your  **oneadaptr** power adapter safely, to ensure your personal safety and reduce the risk of fire, electric shock or injury.

1. Do not apply external force on the cord.
2. Do not unplug by pulling the cord.
3. Do not connect a binded cord to the power supply.
4. Do not place the cord or device near heating elements.
5. Do not bend the blade or pins of the plug.
6. If there is any strange sound, smoke or odor, pull of the cable immediately.
7. Do not disassemble (It may cause fire or electric shock)
8. Do not put any sharp objects into the venting hole of the product (It may cause fire or electric shock)
9. Ensure to plug the product firmly.
10. Ensure not to use a damaged cable. (It may cause fire or electric shock)
11. Do not place the product on a bed, bag or inside a closet that is not good for ventilation.
12. Always wipe off the product with soft fabric, not water mop. (water may cause electric shock)
13. Keep clean the power plug and the outlet (Dirt may cause a short circuit and fire)
14. Keep the product out of reach of children.
15. Don't unplug the power cord with a wet hand. (It may cause electric shock)
16. Unplug the power cord if you don't use the product for a long time. (It may cause heat, fire and electric shock)



One World · One Adaptr

For more information, please visit www.OneAdaptr.com