



SOLID-BODY "HARD-HEAD" BITS

Relton's "Hard-Head" bits are designed to bore large holes through concrete without the need to break out the core every few inches.

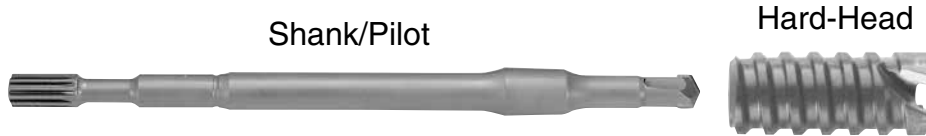


Slide the taper end of the shank into the "Hard-Head" bit. A slight twisting motion will help keep the bit from falling off before beginning the cut. The pilot is integrated on the shank, so drilling can be accomplished without interruption! Once used, shank and head become one piece.




Hard-Head
3 1/2" Length

Head-only
1 1/8" thru 1 5/8"

DIAMETER	PART NO.	LIST PRICE	WT. (lbs)
1 1/8"	SB-18	\$176.00	0.7
1 1/4"	SB-20	182.00	0.8
1 1/2"	SB-24	189.00	1.3
1 5/8"	SB-26	202.00	1.4

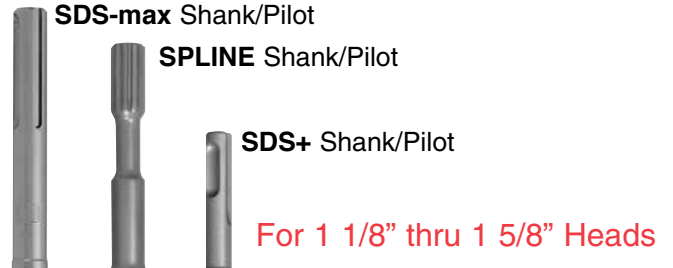


DRILLING DEPTH	SHANK STYLE	PART NO.	LIST PRICE	WT. (lbs)
10"	SPLINE	S02-10S	\$62.00	1.8
	SDS-max	SMX-10S	76.00	1.7
	SDS+	S07-10S	62.00	0.9
18"	SPLINE	S02-18S	76.00	3.1
	SDS-max	SMX-18S	89.00	2.7
	SDS+	S07-18S	76.00	1.5
24"	SPLINE	S02-24S	89.00	3.9
	SDS-max	SMX-24S	102.00	3.6
	SDS+	S07-24S	89.00	1.9

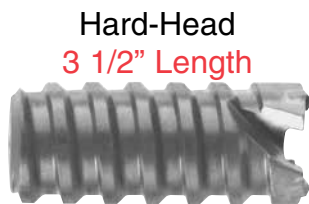

Hard-Head
3 1/2" Length

Head-only
1 3/4" thru 3"

DIAMETER	PART NO.	LIST PRICE	WT. (lbs)
1 3/4"	SB-28	\$208.00	1.4
2"	SB-32	223.00	1.9
2 1/2"	SB-40	257.00	3.4
3"	SB-48	290.00	5.4

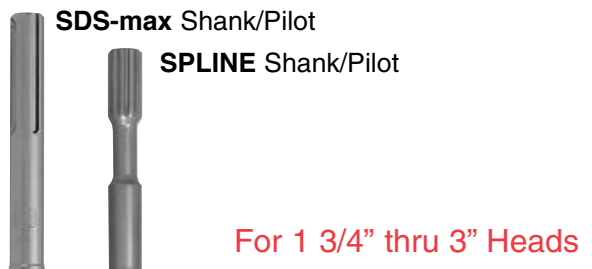

DRILLING DEPTH	SHANK STYLE	PART NO.	LIST PRICE	WT. (lbs)
10"	SPLINE	S02-10	\$69.00	2.4
	SDS-max	SMX-10	81.00	2.4
18"	SPLINE	S02-18	81.00	3.8
	SDS-max	SMX-18	96.00	3.8
24"	SPLINE	S02-24	96.00	4.8
	SDS-max	SMX-24	108.00	4.8

IMPORTANT INFORMATION

Once Relton's "Hard-Head" bits have been used, the tapered shank cannot be removed by conventional means. For shank removal, return to Relton Corporation.