

The Izze-Racing 24-Bit ADC-to-CAN Amplifier is designed to measure the voltage signal from a strain gauge or load cell with class-leading precision & ultra-low noise, and outputs the raw voltage, temperature, and user-calibrated output with advanced temperature compensation via CAN.

The amplifier measure's differential voltages with a resolution of  $1\mu\text{V}$  and RMS noise of only  $\pm 750\text{nV}$  at a sampling frequency of  $100\text{Hz}$ . The differential voltage and temperature is broadcasted via CAN but it may also be programmed to simultaneously transmit a calibrated output (convert voltage to strain/force) with linear or advanced tabular temperature compensation.



## AMPLIFIER SPECIFICATIONS

|   |  |
|---|--|
| Differential Voltage Measurement Range, $\Delta V$                                    | $\pm 32\text{ mV}$ (limited by 16-bit CAN output)                                |
| Maximum Differential Voltage, $\Delta V_{\text{max}}$                                 | $\pm 5.0\text{ V}$   |
| Resolution  | $1\ \mu\text{V}$ (limited by 16-bit CAN output)                                  |
| Accuracy  | $\pm 60\ \mu\text{V}$  |
| RMS Noise<br>(For $350\ \Omega$ full-bridge strain gauge / load cell with excitation) | $\pm 6\ \mu\text{V}$ at $800\text{Hz}$<br>$\pm 750\ \text{nV}$ at $100\text{Hz}$ |
| Filter  | 1 <sup>st</sup> Order LP Filter, $f_c = 1.6\text{kHz}$                           |
| Supply Voltage, $V_s$   | 5 to 8 V   |
| Supply Current, $I_s$ (typ)   | 34 mA  |
| Bridge Excitation Voltage, $V_b$  | 4 V  |
| Maximum Bridge Excitation Current Draw, $I_{B,\text{max}}$                            | 40 mA  |
| Input Impedance, $R_i$  | 110 k $\Omega$   |
| Recommended Strain Gauge / Load Cell Impedance, $R_B$                                 | 350 $\Omega$   |
| Resolution, Temperature Sensor  | $0.4\ ^\circ\text{C}$  |
| Accuracy, Temperature Sensor  | $\pm 2.0\ ^\circ\text{C}$  |

## MECHANICAL SPECIFICATIONS

|                                    |                               |
|------------------------------------|-------------------------------|
| Weight (excluding wiring harness)  | 19 g                          |
| L x W x H (max), Amplifier         | 54 x 22 x 6 mm                |
| Protection Rating                  | IP66                          |
| Operating Temperature Range, $T_p$ | $-40$ to $85\ ^\circ\text{C}$ |

## CAN SPECIFICATIONS

|                        |   |                   |
|------------------------|---|-------------------|
| Standard               | CAN 2.0A (11-bit identifier), ISO-11898 |                   |
| Bit Rate               | 1 Mbit/s (configurable upon request)    |                   |
| Byte Order             | Big-Endian / Motorola                   |                   |
| Data Conversion        | 1 $\mu$ V per bit                       | Diff. Voltage     |
|                        | 0.1 per bit                             | Calibrated Output |
|                        | 0.1 °C per bit                          | Temperature       |
| (all variables signed) |   |                   |
| CAN ID (Default)       | 1250 (Dec) / 0x4E2 (Hex)                |                   |
| Termination            | None                                    |                   |

### CAN ID: 0x4E2 (Default)

|                                 |              |                      |              |                      |              |                           |              |
|---------------------------------|--------------|----------------------|--------------|----------------------|--------------|---------------------------|--------------|
| Differential Voltage ( $\mu$ V) |              | Calibrated Output, F |              | Internal Temperature |              | Opt. External Temperature |              |
| Byte 0 (MSB)                    | Byte 1 (LSB) | Byte 2 (MSB)         | Byte 3 (LSB) | Byte 4 (MSB)         | Byte 5 (LSB) | Byte 6 (MSB)              | Byte 7 (LSB) |

## WIRING SPECIFICATIONS:

|                     |  |
|---------------------|--|
| Wire                | 26 AWG M22759/32, DR25 jacket          |
| Cable Length (typ.) | 500 mm (CAN output side)               |
|                     | 250 mm (strain gauge / load cell side) |
| Connector           | None                                   |


### STRAIN GAUGE / LOAD CELL

|              |       |           |
|--------------|-------|-----------|
| Excitation + | Red   |           |
| Excitation - | Black | (twisted) |
| Signal +     | Green |           |
| Signal -     | White | (twisted) |
| Temperature  | Blue  |           |


### CAN

|                       |       |           |
|-----------------------|-------|-----------|
| Supply Voltage, $V_s$ | Red   |           |
| Ground                | Black | (twisted) |
| CAN +                 | Blue  |           |
| CAN -                 | White | (twisted) |

## DIMENSIONS AND WIRING LAYOUT:

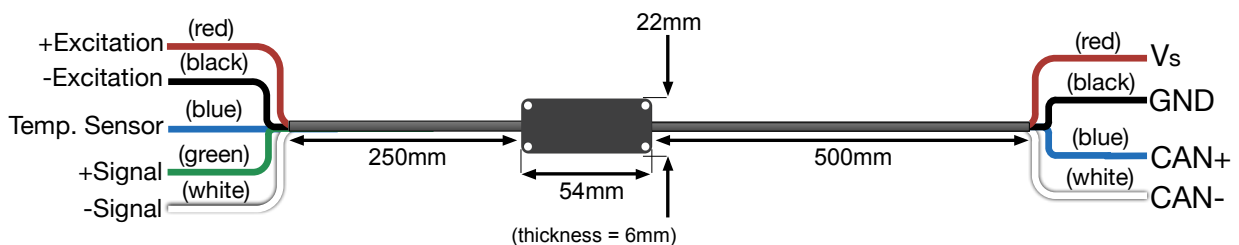

## WIRING DIAGRAM:

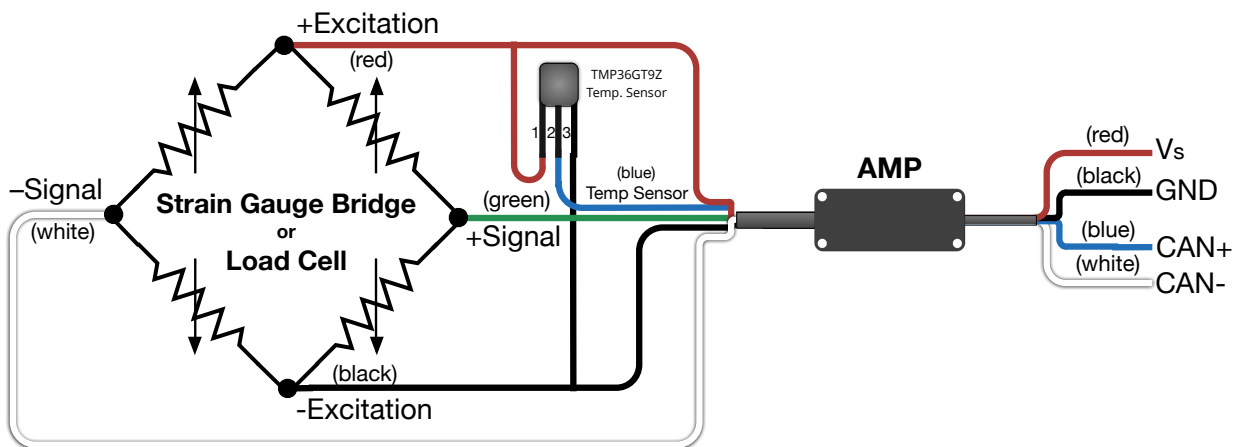

- External Temperature Sensor: Analog Devices TMP36GT9Z
- The external temperature sensor, along with soldering tabs for strain gauge attachment, may be attached to the amplifier upon request.

## SENSOR CONFIGURATION:

To modify the sensor's configuration, send the following CAN messages at 1Hz for at least 10 seconds and then reset the sensor by disconnecting power for 10 seconds:

### CAN ID: Current Base ID

| Programming Constant |              | New CAN Base ID (11-bit) |              | Update Rate | Temp. Comp. | Temp. Sensor | Bit Rate       |
|----------------------|--------------|--------------------------|--------------|-------------|-------------|--------------|----------------|
| Byte 0 (MSB)         | Byte 1 (LSB) | Byte 2 (MSB)             | Byte 3 (LSB) | Byte 4      | Byte 5      | Byte 6       | Byte 7         |
| 30000 = 0x7530       |              | 1 = 0x001                |              | 1 = 100Hz   | 1 = None    | 1 = Internal | 1 = 1 Mbit/s   |
|                      |              | ⋮                        |              | 2 = 200Hz   | 2 = Linear  | 2 = External | 2 = 500 kbit/s |
|                      |              | 2047 = 0x7FF             |              | 3 = 400Hz   | 3 = Tabular |              | 3 = 250 kbit/s |
|                      |              |                          |              | 4 = 800Hz   |             |              | 4 = 125 kbit/s |

CAN messages should only be sent to the sensor during the configuration sequence. **DO NOT continuously send CAN messages to the sensor.**

## LINEAR CALIBRATED OUTPUT, F:

$$F = M \times V + C$$

(F has resolution of 0.1)

where,

$$V = 16\text{-bit voltage in } \mu\text{V}$$

The gain, M, and offset, C, are specified in scientific notation:

$$M = m_M \times 10^{n_M}$$

$$C = m_C \times 10^{n_C}$$

where the respective coefficient, m, and exponent, n, are specified by sending the following CAN messages to the amplifier (send at 1-10Hz for 10 seconds, then cycle power to sensor):

### CAN ID: Current Base ID

| Programming Constant |              | Gain, Coefficient [ $m_M$ ] |              | Gain, Exponent [ $n_M$ ] | Offset, Coefficient [ $m_C$ ] |              | Offset, Exponent [ $n_C$ ] |
|----------------------|--------------|-----------------------------|--------------|--------------------------|-------------------------------|--------------|----------------------------|
| Byte 0 (MSB)         | Byte 1 (LSB) | Byte 2 (MSB)                | Byte 3 (LSB) | Byte 4                   | Byte 5 (MSB)                  | Byte 6 (LSB) | Byte 7                     |
| 20000 = 0x4E20       |              | 0 = 0x0000                  |              | 0 = 0x000                | 0 = 0x0000                    |              | 0 = 0x000                  |
|                      |              | ⋮                           |              | ⋮                        | ⋮                             |              | ⋮                          |
|                      |              | 65536 = 0x7FFF              |              | 256 = 0x100              | 65536 = 0x7FFF                |              | 256 = 0x100                |
|                      |              | (2's compliment)            |              | (2's compliment)         | (2's compliment)              |              | (2's compliment)           |

### EXAMPLE:

$$M = 1.234 \text{ N}/\mu\text{V} = 1234 \times 10^{-3} \Rightarrow m_M = 1234, n_M = -3$$

$$C = -5600 \text{ N} = -56 \times 10^2 \Rightarrow m_C = -56, n_C = 2$$

$$m_M = 1234 = 1234 \text{ (DEC) or } 0x4D2 \text{ (HEX) for Byte 2-3}$$

$$n_M = -3 \rightarrow 2\text{'s Compliment} \Rightarrow (2^8 - 3) = 253 \text{ (DEC) or } 0xFD \text{ (HEX) for Byte 4}$$

$$m_C = -56 \rightarrow 2\text{'s Compliment} \Rightarrow (2^{16} - 56) = 65480 \text{ (DEC) or } 0xFFC8 \text{ (HEX) for Byte 5-6}$$

$$n_C = 2 = 2 \text{ (DEC) or } 0x02 \text{ (HEX) for Byte 7}$$

### Resultant CAN Message:

| Programming Constant |              | Slope, Coefficient [ $m_M$ ] |              | Slope, Exponent [ $n_M$ ] | Offset, Coefficient [ $m_C$ ] |              | Offset, Exponent [ $n_C$ ] |
|----------------------|--------------|------------------------------|--------------|---------------------------|-------------------------------|--------------|----------------------------|
| Byte 0 (MSB)         | Byte 1 (LSB) | Byte 2 (MSB)                 | Byte 3 (LSB) | Byte 4                    | Byte 5 (MSB)                  | Byte 6 (LSB) | Byte 7                     |
| 20000 = 0x4E20       |              | 1234 = 0x4D2                 |              | 253 = 0xFD                | 65533 = 0xFFC8                |              | 2 = 0x02                   |
|                      |              | (Value = 1234)               |              | (Value = -3)              | (Value = -56)                 |              | (Value = 2)                |

**LINEAR TEMPERATURE COMPENSATION of CALIBRATED OUTPUT, F:**

$$F = M(T) \times V + C(T)$$

where,

V = 16-bit voltage in  $\mu V$

$$M(T) = (T - 25^\circ C) \times \frac{M_L}{100} \times M_0 + M_0$$

$$C(T) = (T - 25^\circ C) \times C_L + C_0$$

- $M_0$  and  $C_0$  are the linear gain and offset constants (referenced at  $25^\circ C$ ) programmed in the previous section.
- T is the temperature measured by the internal or external temperature sensor.
- $M_L$  is the percent change in gain, M, per degree Celsius,  $M_L \doteq \left[ \frac{\%}{^\circ C} \right]$
- $C_L$  is the correction in offset, C, per degree Celsius,  $C_L \doteq \left[ \frac{\Delta C}{^\circ C} \right]$
- $M_L$  is approximately  $-0.034 \% / ^\circ C$  for steel and  $-0.067 \% / ^\circ C$  for aluminum. The temperature correction in offset,  $C_L$ , is application specific but typically linear in behavior.

The gain's temperature sensitivity,  $M_L$ , and temperature correction in offset,  $C_L$ , are specified in scientific notation:

$$M_L = m_{ML} \times 10^{n_{ML}}$$

$$C_L = m_{CL} \times 10^{n_{CL}}$$

where the respective coefficient, m, and exponent, n, are specified by sending the following CAN message to the amplifier (send at 1-10Hz for 10 seconds, then cycle power to sensor):

**CAN ID: Current Base ID**

| Programming Constant |              | $M_L$ , Coefficient [ $m_{ML}$ ] |              | $M_L$ , Exponent [ $n_{ML}$ ] | $C_L$ , Coefficient [ $m_{CL}$ ] |              | $C_L$ , Exponent [ $n_{CL}$ ] |
|----------------------|--------------|----------------------------------|--------------|-------------------------------|----------------------------------|--------------|-------------------------------|
| Byte 0 (MSB)         | Byte 1 (LSB) | Byte 2 (MSB)                     | Byte 3 (LSB) | Byte 4                        | Byte 5 (MSB)                     | Byte 6 (LSB) | Byte 7                        |
| 20001 = 0x4E21       |              | 0 = 0x0000                       |              | 0 = 0x000                     | 0 = 0x0000                       |              | 0 = 0x000                     |
|                      |              | ⋮                                |              | ⋮                             | ⋮                                |              | ⋮                             |
|                      |              | 65536 = 0x7FFF                   |              | 256 = 0x100                   | 65536 = 0x7FFF                   |              | 256 = 0x100                   |
|                      |              | (2's compliment)                 |              | (2's compliment)              | (2's compliment)                 |              | (2's compliment)              |

**EXAMPLE:**

$$M_L = -0.067 \% / ^\circ C = -67 \times 10^{-3} \quad \Rightarrow m_{ML} = -67, n_{ML} = -3$$

$$C_L = 4.53 N / ^\circ C = 453 \times 10^{-2} \quad \Rightarrow m_{CL} = 453, n_{CL} = -2$$

$$m_{ML} = -67 \rightarrow 2\text{'s Compliment} \Rightarrow (2^{16} - 67) = 65469 \text{ (DEC) or } 0xFFBD \text{ (HEX) for Byte 2-3}$$

$$n_{ML} = -3 \rightarrow 2\text{'s Compliment} \Rightarrow (2^8 - 3) = 253 \text{ (DEC) or } 0xFD \text{ (HEX) for Byte 4}$$

$$m_{CL} = 453 = 453 \text{ (DEC) or } 0x1C5 \text{ (HEX) for Byte 5-6}$$

$$n_{CL} = -2 \rightarrow 2\text{'s Compliment} \Rightarrow (2^8 - 2) = 254 \text{ (DEC) or } 0xFE \text{ (HEX) for Byte 7}$$

**Resultant CAN Message:**

| Programming Constant |              | Slope, Coefficient [ $m_{ML}$ ] |              | Slope, Exponent [ $n_{ML}$ ] | Offset, Coefficient [ $m_{CL}$ ] |              | Offset, Exponent [ $n_{CL}$ ] |
|----------------------|--------------|---------------------------------|--------------|------------------------------|----------------------------------|--------------|-------------------------------|
| Byte 0 (MSB)         | Byte 1 (LSB) | Byte 2 (MSB)                    | Byte 3 (LSB) | Byte 4                       | Byte 5 (MSB)                     | Byte 6 (LSB) | Byte 7                        |
| 20001 = 0x4E21       |              | 65469 = 0xFFBD<br>(Value = -67) |              | 253 = 0xFD<br>(Value = -3)   | 453 = 0x1C5<br>(Value = 453)     |              | 254 = 0xFE<br>(Value = -2)    |

**TABULAR TEMPERATURE COMPENSATION of CALIBRATED OUTPUT, F:**

$$F = M(T) \times V + C(T)$$

where,

V = 16-bit voltage in  $\mu V$

M(T) and C(T) vary with temperature according to the table below (with linear interpolation):

| Temp.  | Gain, $M_{T\#}$ | Offset, $C_{T\#}$ |
|--------|-----------------|-------------------|
| -25 °C | $M_{T0}$        | $C_{T0}$          |
| 0 °C   | $M_{T1}$        | $C_{T1}$          |
| 25 °C  | $M_{T2}$        | $C_{T2}$          |
| 50 °C  | $M_{T3}$        | $C_{T3}$          |
| 75 °C  | $M_{T4}$        | $C_{T4}$          |
| 100 °C | $M_{T5}$        | $C_{T5}$          |
| 125 °C | $M_{T6}$        | $C_{T6}$          |
| 150 °C | $M_{T7}$        | $C_{T7}$          |

The gain and offset at different temperatures,  $M_{T\#}$  and  $C_{T\#}$ , respectively, are specified in scientific notation:

$$M_{T\#} = m_{MT\#} \times 10^{n_{MT\#}}$$

$$C_{T\#} = m_{CT\#} \times 10^{n_{CT\#}}$$

where the respective coefficient, m, and exponent, n, are specified by sending the following CAN messages to the amplifier (send at 1-10Hz for 10 seconds, then cycle power to sensor):

**Gain and Offset at -25 °C**

| Programming Constant |              | $M_{T0}$ , Coefficient [ $m_{MT0}$ ] |              | $M_{T0}$ , Exponent [ $n_{MT0}$ ] | $C_{T0}$ , Coefficient [ $m_{CT0}$ ] |              | $C_{T0}$ , Exponent [ $n_{CT0}$ ] |
|----------------------|--------------|--------------------------------------|--------------|-----------------------------------|--------------------------------------|--------------|-----------------------------------|
| Byte 0 (MSB)         | Byte 1 (LSB) | Byte 2 (MSB)                         | Byte 3 (LSB) | Byte 4                            | Byte 5 (MSB)                         | Byte 6 (LSB) | Byte 7                            |
| 20002 = 0x4E22       |              | 0 = 0x0000                           |              | 0 = 0x000                         | 0 = 0x0000                           |              | 0 = 0x000                         |
|                      |              | ⋮                                    |              | ⋮                                 | ⋮                                    |              | ⋮                                 |
|                      |              | 65536 = 0x7FFF                       |              | 256 = 0x100                       | 65536 = 0x7FFF                       |              | 256 = 0x100                       |
|                      |              | (2's compliment)                     |              | (2's compliment)                  | (2's compliment)                     |              | (2's compliment)                  |

**Gain and Offset at 0 °C**

| Programming Constant |              | $M_{T1}$ , Coefficient [ $m_{MT1}$ ] |              | $M_{T1}$ , Exponent [ $n_{MT1}$ ] | $C_{T1}$ , Coefficient [ $m_{CT1}$ ] |              | $C_{T1}$ , Exponent [ $n_{CT1}$ ] |
|----------------------|--------------|--------------------------------------|--------------|-----------------------------------|--------------------------------------|--------------|-----------------------------------|
| Byte 0 (MSB)         | Byte 1 (LSB) | Byte 2 (MSB)                         | Byte 3 (LSB) | Byte 4                            | Byte 5 (MSB)                         | Byte 6 (LSB) | Byte 7                            |
| 20003 = 0x4E23       |              | 0 = 0x0000                           |              | 0 = 0x000                         | 0 = 0x0000                           |              | 0 = 0x000                         |
|                      |              | ⋮                                    |              | ⋮                                 | ⋮                                    |              | ⋮                                 |
|                      |              | 65536 = 0x7FFF                       |              | 256 = 0x100                       | 65536 = 0x7FFF                       |              | 256 = 0x100                       |
|                      |              | (2's compliment)                     |              | (2's compliment)                  | (2's compliment)                     |              | (2's compliment)                  |

### Gain and Offset at 25 °C

| Programming Constant |              | M <sub>T2</sub> , Coefficient [m <sub>MT2</sub> ] |              | M <sub>T2</sub> , Exponent [n <sub>MT2</sub> ] | C <sub>T2</sub> , Coefficient [m <sub>CT2</sub> ] |              | C <sub>T0</sub> , Exponent [n <sub>CT2</sub> ] |
|----------------------|--------------|---|--------------|--|---|--------------|--|
| Byte 0 (MSB)         | Byte 1 (LSB) | Byte 2 (MSB)                                      | Byte 3 (LSB) | Byte 4   | Byte 5 (MSB)                                      | Byte 6 (LSB) | Byte 7   |
| 20004 = 0x4E24       |              | 0 = 0x0000  |              | 0 = 0x000                                      | 0 = 0x0000  |              | 0 = 0x000                                      |
|                      |              | ⋮   |              | ⋮  | ⋮   |              | ⋮  |
|                      |              | 65536 = 0x7FFF                                    |              | 256 = 0x100                                    | 65536 = 0x7FFF                                    |              | 256 = 0x100                                    |
|                      |              | (2's compliment)                                  |              | (2's compliment)                               | (2's compliment)                                  |              | (2's compliment)                               |

### Gain and Offset at 50 °C

| Programming Constant |              | M <sub>T3</sub> , Coefficient [m <sub>MT3</sub> ] |              | M <sub>T3</sub> , Exponent [n <sub>MT3</sub> ] | C <sub>T3</sub> , Coefficient [m <sub>CT3</sub> ] |              | C <sub>T3</sub> , Exponent [n <sub>CT3</sub> ] |
|----------------------|--------------|---|--------------|--|---|--------------|--|
| Byte 0 (MSB)         | Byte 1 (LSB) | Byte 2 (MSB)                                      | Byte 3 (LSB) | Byte 4   | Byte 5 (MSB)                                      | Byte 6 (LSB) | Byte 7   |
| 20005 = 0x4E25       |              | 0 = 0x0000  |              | 0 = 0x000                                      | 0 = 0x0000  |              | 0 = 0x000                                      |
|                      |              | ⋮   |              | ⋮  | ⋮   |              | ⋮  |
|                      |              | 65536 = 0x7FFF                                    |              | 256 = 0x100                                    | 65536 = 0x7FFF                                    |              | 256 = 0x100                                    |
|                      |              | (2's compliment)                                  |              | (2's compliment)                               | (2's compliment)                                  |              | (2's compliment)                               |

### Gain and Offset at 75 °C

| Programming Constant |              | M <sub>T4</sub> , Coefficient [m <sub>MT4</sub> ] |              | M <sub>T4</sub> , Exponent [n <sub>MT4</sub> ] | C <sub>T4</sub> , Coefficient [m <sub>CT4</sub> ] |              | C <sub>T0</sub> , Exponent [n <sub>CT4</sub> ] |
|----------------------|--------------|---|--------------|--|---|--------------|--|
| Byte 0 (MSB)         | Byte 1 (LSB) | Byte 2 (MSB)                                      | Byte 3 (LSB) | Byte 4   | Byte 5 (MSB)                                      | Byte 6 (LSB) | Byte 7   |
| 20006 = 0x4E26       |              | 0 = 0x0000  |              | 0 = 0x000                                      | 0 = 0x0000  |              | 0 = 0x000                                      |
|                      |              | ⋮   |              | ⋮  | ⋮   |              | ⋮  |
|                      |              | 65536 = 0x7FFF                                    |              | 256 = 0x100                                    | 65536 = 0x7FFF                                    |              | 256 = 0x100                                    |
|                      |              | (2's compliment)                                  |              | (2's compliment)                               | (2's compliment)                                  |              | (2's compliment)                               |

### Gain and Offset at 100 °C

| Programming Constant |              | M <sub>T5</sub> , Coefficient [m <sub>MT5</sub> ] |              | M <sub>T5</sub> , Exponent [n <sub>MT5</sub> ] | C <sub>T5</sub> , Coefficient [m <sub>CT5</sub> ] |              | C <sub>T0</sub> , Exponent [n <sub>CT5</sub> ] |
|----------------------|--------------|---|--------------|--|---|--------------|--|
| Byte 0 (MSB)         | Byte 1 (LSB) | Byte 2 (MSB)                                      | Byte 3 (LSB) | Byte 4   | Byte 5 (MSB)                                      | Byte 6 (LSB) | Byte 7   |
| 20007 = 0x4E27       |              | 0 = 0x0000  |              | 0 = 0x000                                      | 0 = 0x0000  |              | 0 = 0x000                                      |
|                      |              | ⋮   |              | ⋮  | ⋮   |              | ⋮  |
|                      |              | 65536 = 0x7FFF                                    |              | 256 = 0x100                                    | 65536 = 0x7FFF                                    |              | 256 = 0x100                                    |
|                      |              | (2's compliment)                                  |              | (2's compliment)                               | (2's compliment)                                  |              | (2's compliment)                               |

### Gain and Offset at 125 °C

| Programming Constant |              | M <sub>T6</sub> , Coefficient [m <sub>MT6</sub> ] |              | M <sub>T6</sub> , Exponent [n <sub>MT6</sub> ] | C <sub>T6</sub> , Coefficient [m <sub>CT6</sub> ] |              | C <sub>T6</sub> , Exponent [n <sub>CT6</sub> ] |
|----------------------|--------------|---|--------------|--|---|--------------|--|
| Byte 0 (MSB)         | Byte 1 (LSB) | Byte 2 (MSB)                                      | Byte 3 (LSB) | Byte 4   | Byte 5 (MSB)                                      | Byte 6 (LSB) | Byte 7   |
| 20008 = 0x4E28       |              | 0 = 0x0000  |              | 0 = 0x000                                      | 0 = 0x0000  |              | 0 = 0x000                                      |
|                      |              | ⋮   |              | ⋮  | ⋮   |              | ⋮  |
|                      |              | 65536 = 0x7FFF                                    |              | 256 = 0x100                                    | 65536 = 0x7FFF                                    |              | 256 = 0x100                                    |
|                      |              | (2's compliment)                                  |              | (2's compliment)                               | (2's compliment)                                  |              | (2's compliment)                               |

### Gain and Offset at 150 °C

| Programming Constant |              | M <sub>T7</sub> , Coefficient [m <sub>MT7</sub> ] |              | M <sub>T7</sub> , Exponent [n <sub>MT7</sub> ] | C <sub>T7</sub> , Coefficient [m <sub>CT7</sub> ] |              | C <sub>T7</sub> , Exponent [n <sub>CT7</sub> ] |
|----------------------|--------------|---|--------------|--|---|--------------|--|
| Byte 0 (MSB)         | Byte 1 (LSB) | Byte 2 (MSB)                                      | Byte 3 (LSB) | Byte 4   | Byte 5 (MSB)                                      | Byte 6 (LSB) | Byte 7   |
| 20009 = 0x4E29       |              | 0 = 0x0000  |              | 0 = 0x000                                      | 0 = 0x0000  |              | 0 = 0x000                                      |
|                      |              | ⋮   |              | ⋮  | ⋮   |              | ⋮  |
|                      |              | 65536 = 0x7FFF                                    |              | 256 = 0x100                                    | 65536 = 0x7FFF                                    |              | 256 = 0x100                                    |
|                      |              | (2's compliment)                                  |              | (2's compliment)                               | (2's compliment)                                  |              | (2's compliment)                               |





### ADDITIONAL INFORMATION:

- Recommended full-bridge strain gauges: 350Ω OMEGA Transducer Quality Strain Gauges
  - o Bending/Axial: [www.omega.com/pptst/SGT\\_Full-Bridge\\_Diaphragm.html](http://www.omega.com/pptst/SGT_Full-Bridge_Diaphragm.html)
  - o Shear: [www.omega.com/pptst/SGT\\_Full-Bridge\\_Shear.html](http://www.omega.com/pptst/SGT_Full-Bridge_Shear.html)
- An update frequency of 100 or 200Hz offers a good balance between speed & RMS noise and is recommended for most applications
- The wiring harness length between the amplifier and strain gauge / load cell should be as short as possible
- Do not subject the amplifier module to stress, force, and/or bending
- Avoid mounting the amplifier near hot objects. The temperature of the amplifier should closely match the temperature of the strain gauge if the *internal* temperature sensor is used for temperature compensation.

### WARRANTY:

All amplifiers come with a 30-day return policy and have a 1-year warranty from manufacturing defects. If there is ever an issue, please contact us at [support@izzeracing.com](mailto:support@izzeracing.com)