




> aWR8

Receptor multi-compatibility
Excellent blackness
Competitiveness

AWR®8 is the standard ribbon from the inkanto wax range.


It doesn't make any compromise to quality and printing performance and therefore matches all criteria expected by a traditional wax application.

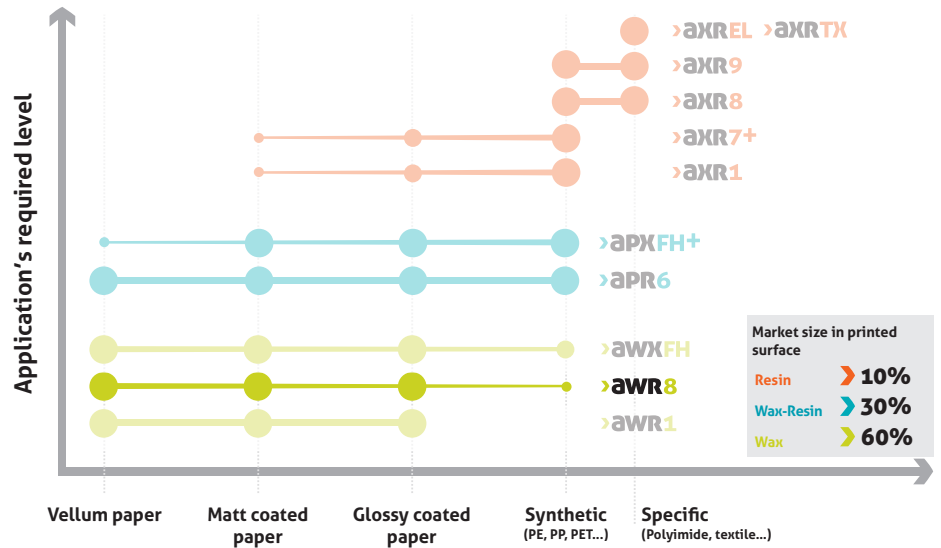


Printing receptor

papers		synthetics	
Vellum	●●●	PP	●○○
Coated	●●●	PE	●○○
Glossy coated	●●●	PET	●○○

Printer settings

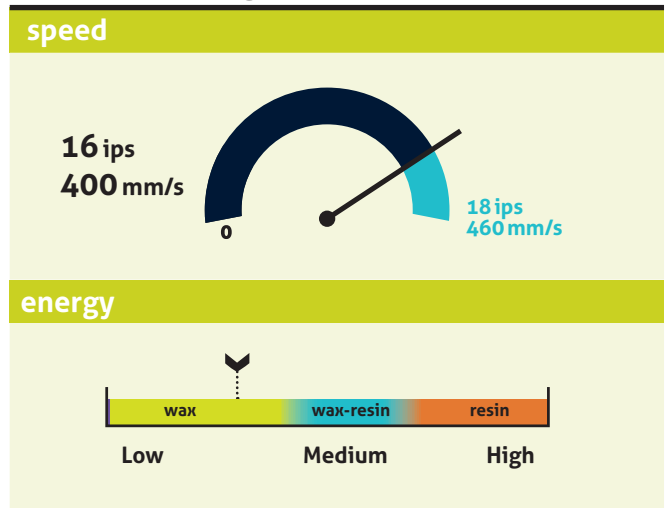

Print resistance

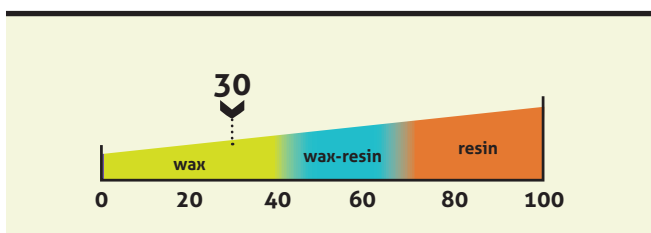

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

Your ribbon identity

Colours: ● ● ● ● ●


Length (m):

Width (mm):

Part number:

Your distributor:

Contact:





> aWR8

Application fields




Product performance

print quality		
90°Barcode 70	A _a Small characters 85	Logos 95
0°Barcode 100	2D Barcode 100	Blackness <small>*Optical Density by Reflection, measured using a densitometer.</small> 2,1 ODR*
technical resistances		
Heat 60°C 140°F / 300°C 572°F	Light/Blue Wool >7	Solvents 100
Water/Submerge 100	Rubbing 40	

Product physico-chemical features

product structure	
PET film	Thickness: 4,5 µm
Ink	Wax
Melting point	65°C/149°F
Backcoating	Silicon based
Coefficient of Friction	Kd < 0.2
Ribbon thickness	< 9 µm
The ribbon is anti static build-up treated	

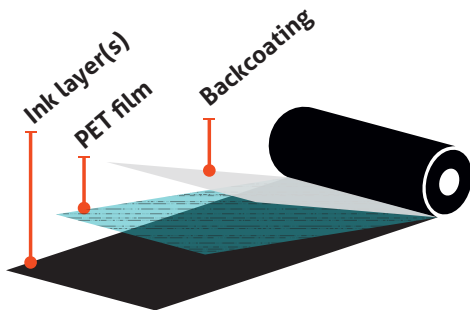

Storage

storage conditions

12 months recommended
 20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.