

## NRS66-109

### Nica QuickJack MR-16 Luminaire

Lamp: (1) 20-50W 12V Lensed MR-16 (not included).

#### PRODUCT DESCRIPTION

Low voltage conical die-cast aluminum luminaire with removable lamp housing for easy relamping. Luminaire has small stem extending from transformer coupler, allowing full aiming and 360° adjustment with a low profile. Must be used with NRS90-P32 (Nora QuickJack rail attachment with integral transformer).

#### SPECIFICATION

##### HOUSING

Main body constructed from one piece 0.07" die-cast aluminum.

##### STEM

0.07" die-cast aluminum with 0.24" thick male QuickJack Brass connector. Stem has a threaded Brass coupler to secure the head to the universal QuickJack transformer

##### ELECTRICAL

###### WIRING

18 Gauge AWG, 200°C, 300V.

###### SOCKET

Porcelain socket rated for 50W 12V lamp max.

###### FINISHES

Brushed Nickel, Bronze, and Silver are available.

##### LABELS AND LISTINGS

UL and cUL Listed for dry location only.

**NORALIGHTING.**

Type


Project

Catalog No.

Lamp/Wattage

#### DIMENSIONS

NRS66-109

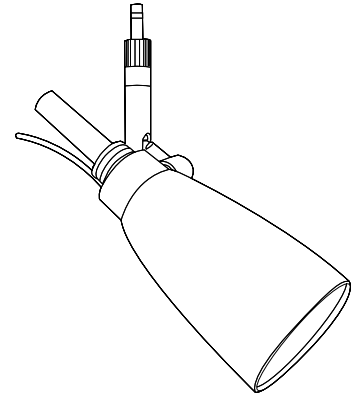

Diameter : 2-3/8"  
Length : 6-7/8"  
Max. Extension : 7"



### Nica QuickJack MR-16 Luminaire

Catalog No.	Finish
NRS66-108	BN = Brushed Nickle BZ = Bronze S = Silver

Create a complete item number: Example: NRS66-109BN

**NORALIGHTING.**

6505 Gayhart St., Commerce, CA 90040 • Phone: 800.686.6672 • FAX: 800.500.9955 • [www.noralighting.com](http://www.noralighting.com)  
e-mail: [nora@noralighting.com](mailto:nora@noralighting.com) • Specifications subject to change without notice. © 2014