Yealink

WF40 Wi-Fi USB Dongle

Supports Yealink SIP-T48G (upgrade to the version of 35.80.0.95 or higher) Reliable Connection Ease-of-use Plug and Play High Transmission Rate Lower Power Consumption



The WF40 Wi-Fi USB dongle is a low-power device that can be used to seamlessly connect the Yealink T48G IP phone to your organisation's wireless network. This dynamic plug-and-play USB device is an ideal office solution for companies seeking affordable and convenient connectivity.

Supported by a powerful transmission rate of 150 Mbps, the dongle is able to quickly and reliably establish Wi-Fi connectivity so that users can communicate, collaborate and access pertinent documents and resources. The WF40 is compliant with UEEE802.11n and IEEE802.11b/g standards, maximising reliability and throughput.



WF40

Key features and benefits

Supports Yealink SIP-T48G (upgrade to the version of 35.80.0.95 or higher) Reliable Connection Ease-of-use Plug and Play High Transmission Rate Lower Power Consumption

Specifications


Network Standard: IEEE802.11b/g/n Transmission Rate: 150 Mbps Frequency Range: 2.4GHz Security: 64/128/152-bit WEP Encryption, WPA-PSK: WPA2-PSK Interface: USB2.0 L*W*H: 26.9mm*18mm*8mm Working Temperature: 0°C ~ +50°C (32°F ~ 122°F) Storage Temperature: -40°C ~+85°C (-40°F ~ 185°F)

Package features

Qty/CTN: 40 PCS N.W/CTN: 1.70 kg G.W/CTN: 2.20 kg Carton Meas: 305mm*260mm*272mm Giftbox Size: 119mm*113mm*26mm

Certifications



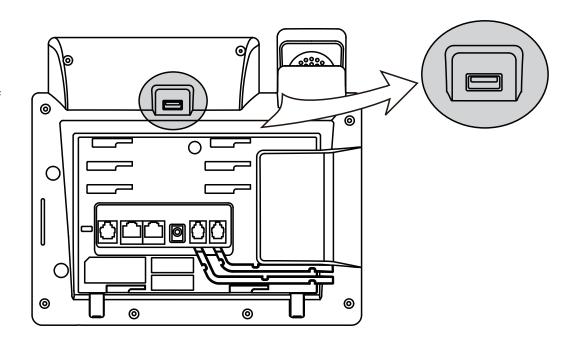

Yealink

Yealink (UK) Ltd, Pennine House, Salford Street, Bury, Lancashire, BL9 6YA, United Kingdom Tel: +44 (0)161 763 2060 Email: sales@yealink.co.uk Web: www.yealink.co.uk