

24 Channel Constant Voltage DMX512 & RDM Decoder / Master

Model No.: D24A

RDM/Stand-alone function/8 bit or 16bit decode/Four PWM frequency/Multiple dimming curve/OLED display

Features

- 24 channels constant voltage output, Max. 5A current per channel, up to 2880W output power.
- Master & decoder mode, RDM function.
- Easy operation with OLED display and 4 buttons.
- DIM/CCT/RGB decoding mode selectable.
- PWM frequency 250/500/2000/8000Hz selectable.
- 16bit (65536 levels) /8bit (256 levels) grey level selectable.
- Output dimming curve gamma value 0.1-9.9 selectable.
- Stand-alone RGB mode and 24 channel dimmer mode selectable, work as DMX master(8 bit) to control other decoders.
- Built-in 10 RGB programs, speed and brightness adjustable.
- Comply with the DMX512 standard protocols.
- DMX signal optoelectronic isolation / amplify.
- Over-heat / Over-load / Short circuit protection, recover automatically.
- With fast self-testing function.



Technical Parameters


Input and Output	
Input voltage	12-24VDC
Input current	120.5A
Output voltage	24 x (12-24)VDC
Output current	24CH, 5A/CH
Output power	24 x (60-120)W
Output type	Constant voltage

Environment	
Operation temperature	Ta: -30°C ~ +55°C
Case temperature (Max.)	Tc: +85°C
IP rating	IP20


Safety and EMC	
EMC standard (EMC)	EN55032:2015, EN61000-3-2:2014, EN61000-3-2:2013, EN55024 :2010/A1:2015
Safety standard(LVD)	EN 61347-1:2015 EN 61347-2-11:2015
Certification	CE,EMC,LVD

Warranty and Protection	
Warranty	5 years
Protection	Reverse polarity Over-heat Over-load Short circuit

Mechanical Structures and Installations

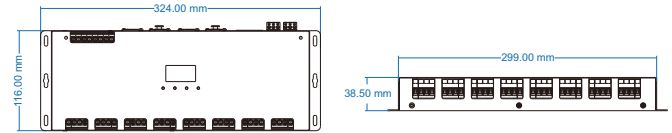

Wiring Diagram

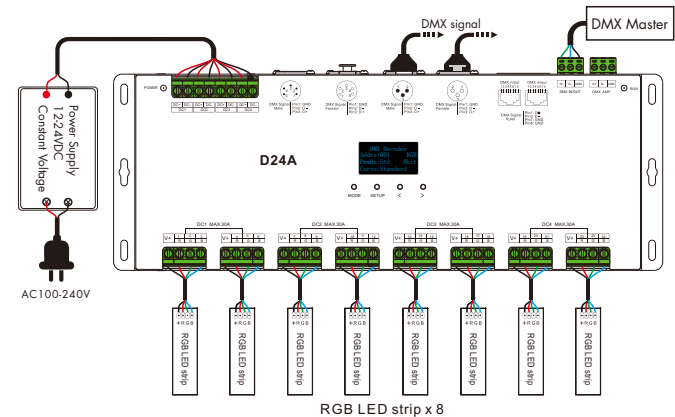

Note:

1. Connecting with green terminal (DMX AMP) or an extra amplifier will be needed when more than 32 decoders are connected, or use overlong signal line, signal amplification should not be more than 5 times continuously.
2. If the recoil effect occurs because of longer signal line or bad line quality, please try to connect 0.25W 90-120Ω terminal resistor at the end of each DMX signal line.

OLED screen interface



Short press MODE key, switch between DMX decoder mode, Dimmer mode and RGB controller mode.
 Short press SETUP key, enter parameter setting state, and switch between multiple parameter item.
 press < or > key for parameter adjustment.
 long press SETUP key or wait 30s to quit parameter setting state.
 long press M & > key for 2s, enter fast self-testing.
 Long press < & > key for 2s, restore factory default parameter.

DMX decoder mode



DMX decode start address:
 Range: 001~999
DMX decode mode:
 DIM (1CH single color) CCT (2CH color temperature) RGB (3CH)

Output PWM frequency:

Std (2KHz)
 High (8KHz) Higher PWM frequency, will cause lower output current,
 Mid (500Hz) higher power noise, but more suitable for camera(No flickers for video).
 Low (250Hz)


Grey level:

8bit
 16bit (choose it if the DMX master support 16 bit)

Output dimming curve(Only valid for 8bit Grey level):

Standard (Gamma 1.6)
 Linear
 Gamma 0.1~9.9

It is recommended to use standard,
 0.1~9.9 is for special requirements.



DMX master mode as 12 channel dimmer



Each channel brightness setting:
 Range: 0-255
 << & >> :
 press < or > key to switch between previous or next page, each page 3 channel.

DMX master mode as RGB controller



Dynamic RGB mode list:

Dynamic RGB mode:
 10 kinds

Mode speed:

Range: 1-10 level

Mode brightness:

Range: 10%-100%

No.	Name
01	White chase jump
02	White synchronous fade
03	White chase fade
04	Color synchronous jump (Red,Orange,Yellow,Green,Cyan,Blue,Purple,White)
05	Color chase jump (Red,Orange,Yellow,Green,Cyan,Blue,Purple,White)
06	Color synchronous gradual
07	Color jump gradual
08	R/G/B/W synchronous fade
09	R/G/B/W chase fade
10	All mode loop play

Address setting table

8bit:

Mode	DIM	CCT	RGB
Address Quantity	8	16	24
Channel	1	001	001 001
	2	001	002 002
	3	001	002 003
	4	002	003 004
	5	002	004 005
	6	002	004 006
	7	003	005 007
	8	003	006 008
	9	003	006 009
	10	004	007 010
	11	004	008 011
	12	004	008 012
	13	005	009 013
	14	005	010 014
	15	005	010 015
	16	006	011 016
	17	006	012 017
	18	006	012 018
	19	007	013 019
	20	007	014 020
	21	007	014 021
	22	008	015 022
	23	008	016 023
	24	008	016 024

16bit:

Mode	DIM	CCT	RGB
Address Quantity	16	32	48
Channel	1	001 002	001 002 001 002
	2	001 002	003 004 003 004
	3	001 002	003 004 005 006
	4	003 004	005 006 007 008
	5	003 004	007 008 009 010
	6	003 004	007 008 011 012
	7	005 006	009 010 013 014
	8	005 006	011 012 015 016
	9	005 006	011 012 017 018
	10	007 008	013 014 019 020
	11	007 008	015 016 021 022
	12	007 008	015 016 023 024
	13	009 010	017 018 025 026
	14	009 010	019 020 027 028
	15	009 010	019 020 029 030
	16	011 012	021 022 031 032
	17	011 012	023 024 033 034
	18	011 012	023 024 035 036
	19	013 014	025 026 037 038
	20	013 014	027 028 039 040
	21	013 014	027 028 041 042
	22	015 016	029 030 043 044
	23	015 016	031 032 045 046
	24	015 016	031 032 047 048

Note: even channel for micro dimming.