

ZP3AB-MA8

Eight way programmable sounder driver board

Eight individually programmable sounder circuits

The ZP3AB-MA8 is one of a series of additional, auxiliary boards designed to extend the ZP3 panel standard range of input/output facilities. Boards are modular in design, and are mounted inside the ZP3 panel enclosure, by means of a ZP3-AC1 auxiliary chassis.

Up to three boards can be fitted into a ZP3 panel. They may be all of a single type, or any combination from the I/O module range. The addition of auxiliary boards can increase the panel outputs to a maximum of 72 all housed within the ZP3 enclosure. Further boards can be added to a system, accommodated in a remote control cabinet, usually located alongside the ZP3 panel. Various sized cabinets are available, designed to match the control panel enclosure. Each ZP3 panel has the ability to operate up to 896 outputs, of which 768 are programmable.

The ZP3AB-MA8 is designed to extend a standard ZP3 control panel by a further 8 alarm outputs, each individually programmable. The maximum power rating for each sounder circuit is 1 Amp.

Open and short circuit monitoring


Wiring is monitored for both open and short circuit faults and sounders must be polarised and wired across the positive and negative alarm circuit conductors. Circuits are terminated with end of line monitoring resistors, tee offs and spurs are not allowed.

Power to operate modules is usually provided internally from the control panel, but terminals on the board are provided for the connection of external power supply units.

Individual alarm indication

Each eight way sounder board is allocated an address by switch settings provided on the PCB. Individual outputs (within the board address) are programmed in the system's cause and effect software set up. Visual indication of alarm active and output fault is given by LEDs for each output.

Housed within the ZP3 panel, options can simply be added during panel manufacture to meet individual specifications, or subsequently fitted on site should a particular requirement become necessary during the life of the system.

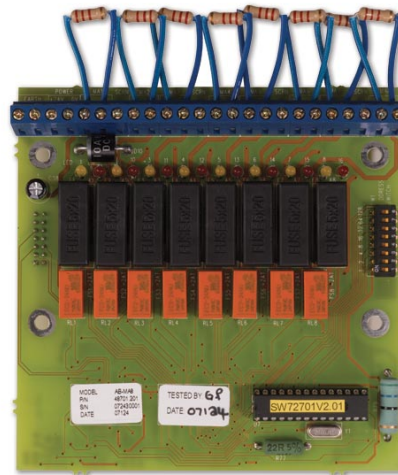

Standard Features

- Eight programmable sounder circuits
- Up to three modules within panel enclosure
- Up to three modules within panel enclosure
- 1 amp per circuit sounder loading
- LED indication for each output

ZP3AB-MA8


Eight way programmable sounder driver board

Specifications

Model No	ZP3AB-MA8
Description	8 way programmable sounder driver board
Compatibility	ZP3 control panels
Mounting	By ZP3-AC1 auxiliary chassis, within ZP3 panel enclosure
Monitoring	Short circuit, open circuit by 2K2 Ohm end of line resistor
Monitored outputs	8
Indication (on PCB)	Alarm active 1 LED (red) per contact Fault 1 LED (amber) per contact
Current per output	Up to 1 Amp as required
Power supply	Voltage 24 volt dc -2 volts +5 volts Current (stand by) 36 mA, (all relays latched) 220 mA
Sounder type	Polarised
Temperature range	-10°C to +60°C
Humidity range	10% to 90% RH (non condensing)
Dimensions	120mm (W) x 120mm (H)
Weight	139g
Accessories	ZP3AB-AC1 - Auxiliary chassis - accommodates up to 3 auxiliary boards 1 chassis per ZP3 panel enclosure
Publication No	PS1295

Ordering Information

Part No.	Description
ZP3AB-MA8	Eight way programmable sounder driver board

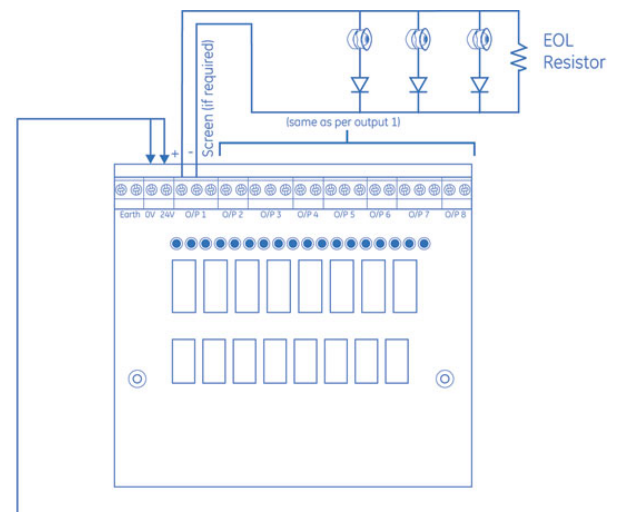

24 Vdc supply (22-29 Vdc)

- Supplied from ZP3 panel auxiliary output supply.
OR
- Supplied from separate 24 Vdc power supply unit.
(Do not connect 0V of panel and power supply)

4184-01