

Rotatable LED Wall Pack



Features

- UL cUL DLC certificate
- IP65 Internal driver
- Input voltage: 120-277V/120-347V
- No UV or IR in the beam
- Easy to install & operate
- Energy saving, long lifespan
- Instant start, No humming
- Green and eco-friendly without mercury

Application

- Entrance lighting, Courtyard lighting
- Industrial lighting, Outdoor landscape lighting
- Building, The hotel
- Wall lighting area and so on



| Specification | | |
|-----------------------|------------------------------|------------------------------|
| Model No. | AST-RWP01B-60WH1CYT1SA1-BR50 | AST-RWP02-80WCT1NB1-BR50 |
| Dimension | 9.4" x 5.9" x 6.5" | 9.1" x 5.2" x 8.9" |
| Color Temperature | 5000 K | 5000 K |
| CRI | >70 | >70 |
| Lumen | 8100 LM | 10800 LM |
| Lumen Efficiency | 135 LM/W | 135 LM/W |
| Input Power | 60W | 80W |
| Viewing Angle | 60° | 60° |
| Input Voltage | 120-277V 50/60Hz | 120-347V 50/60Hz |
| PF | > 0.9 | > 0.9 |
| LED Type | SMD 3030 | SMD 3030 |
| LED QTY | 63 Pcs | 98 Pcs |
| Housing | Aluminium | Aluminium |
| Housing Color | Brown | Brown |
| Operating Temperature | -40°C (-40°F) – 45°C (113°F) | -40°C (-40°F) – 45°C (113°F) |
| Operating Humidity | 10% - 90% RH | 10% - 90% RH |
| Storage Temperature | -40°C (-40°F) – 80°C (176°F) | -40°C (-40°F) – 80°C (176°F) |
| Storage Humidity | 10% - 95% RH | 10% - 95% RH |
| Application | Indoor/ Outdoor | Indoor/ Outdoor |
| Certification | UL , cUL , DLC | UL , cUL , DLC |
| Warranty Time | 5 Years | 5 Years |

Luminaire Property

AST-RWP01B-60W




Luminaire Manufacturer:
Voltage: 119.8 V
Power: 77.50 W

Current: 0.649 A
Power Factor: 0.996


Photometric Results

IES Classification: Type I
Total Rated Lamp Lumens: 10789.0 lm
Efficiency: 100%
Upward Ratio: 1%
Central Intensity: 9178.67 cd
Pos of Max. Intensity: H90 V1

Longitudinal Classification: Very Short
Measurement Flux: 10789 lm
Downward Ratio: 99%
Luminaire Efficacy Rating (LER): 139.26
Max. Intensity: 9181.17 cd

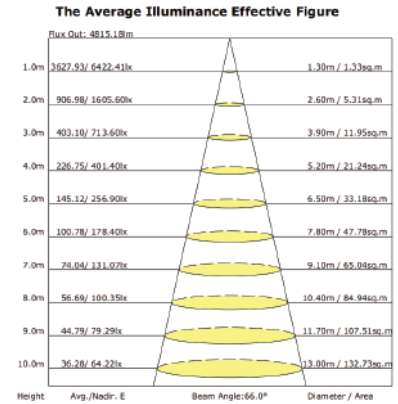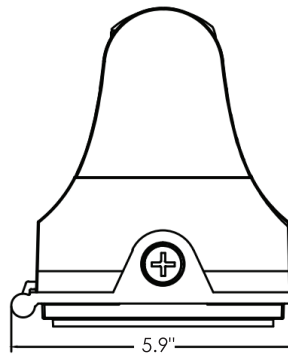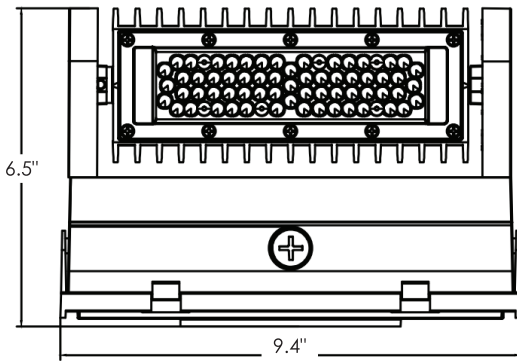

Luminous Intensity Distribution Curve

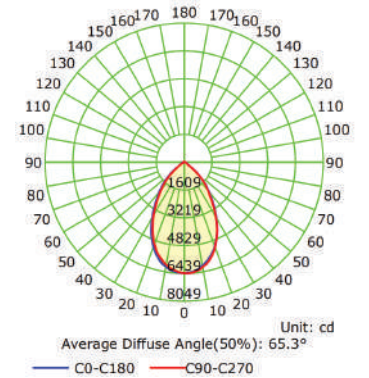

Luminaire Property

AST-RWP02-80W

Luminaire Manufacturer:
Voltage: 119.8 V
Power: 77.50 W

Current: 0.649 A
Power Factor: 0.996

Photometric Results

IES Classification: Type I
Total Rated Lamp Lumens: 10789.0 lm
Efficiency: 100%
Upward Ratio: 1%
Central Intensity: 9178.67 cd
Pos of Max. Intensity: H90 V1

Longitudinal Classification: Very Short
Measurement Flux: 10789 lm
Downward Ratio: 99%
Luminaire Efficacy Rating (LER): 139.26
Max. Intensity: 9181.17 cd

