



# GENYO Series

ELECTRIC PUMP CONTROL AND  
PROTECTION SYSTEM

# Electric pump control and protection system



## Applications.

Domestic pressure boosting  
(single and multi-family dwellings)

---

Small irrigation and gardening

---

Civil water systems (bathing  
establishments, campgrounds,  
sporting facilities)

Xylem introduces Genyo, the new range  
of compact electronic devices, pressure/  
flow switches for control and protection of  
electric pumps.

Genyo is controlled by an electronic circuit  
and is composed of a diaphragm and  
counteracting spring system integrated  
with flow and pressure sensors.

Genyo enables automatic control of pump  
start-up and shutdown based on actual  
water demand, preventing any pressure  
fluctuations at delivery points with constant  
operating point.

Genyo integrates multiple system controls  
into a single device.

## Benefits.

Protection against dry running integrated in  
the device

---

No maintenance required (a convenient  
alternative to traditional diaphragm  
surge tanks)

---

Quick and easy installation

---

Compact size

---

Stable pressure without fluctuations at  
constant operating point

---

Back-up tank to compensate for small leaks  
or drips in the hydraulic system (patented  
system)

---

Limited flow resistance

**For GENYO 16A model only.**

Automatic restart in case of water failure

---

Adjustable starting pressure



# Product range.

GENYO 8A

GENYO 16A



Model	Accessories included	Max current	Start pressure
GENYO 8A/F12	Pressure gauge	8A	Fixed start P: 1.2 bar
GENYO 8A/F15	Pressure gauge	8A	Fixed start P: 1.5 bar
GENYO 8A/F22	Pressure gauge	8A	Fixed start P: 2.2 bar
GENYO 16A/R15-30	Pressure gauge	16A	Adjustable start P: 1,5 ÷ 3,0 bar

\* Version with Power Supply Cable / Plug and Motor Cable also available (for technical details, see "Technical Specifications" section)



Suitable for use with both surface and submersible electric pumps

## Construction characteristics.

**LARGE PASSAGEWAY**  
for lower flow resistance

**SPRING**  
made of bichromate  
Treated steel

**PATENTED STORAGE SYSTEM**  
Permitting the storage of an  
adequate water reserve in a  
limited space


**SENSORS**  
Made of highly resistant  
thermoplastic material containing  
hermetically inserted ultrasonic-  
welded magnets

**LIQUID END MATERIAL**  
Made of non-toxic fibreglass-  
reinforced thermoplastic material

**DIAPHRAGM AND SEALS**  
of special natural rubber for  
higher protection (ip 65)

**ELECTRONIC BOARD**  
For control, protection and  
connections

**NON-RETURN VALVE**  
Integrated into one of the  
sensors with magnet

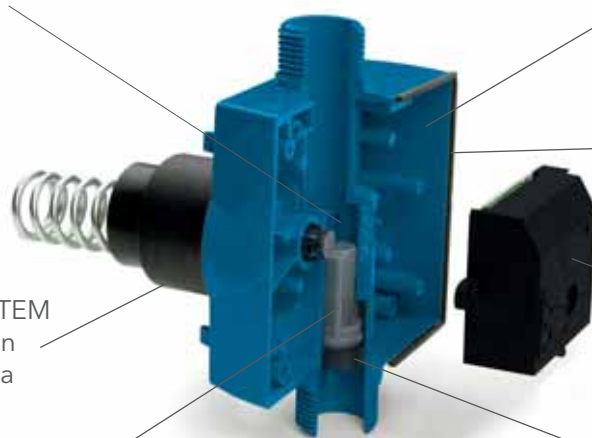

**LED INDICATORS**  
GREEN LED: POWER  
presence of power supply  
RED LED: FAILURE  
indicates an alarm condition  
YELLOW LED: ON  
indicates the pump is running

**MANUAL RESTART  
PUSHBUTTON**  
to restart the pump after  
failure



**INTEGRATED PRESSURE  
GAUGE**  
Range: 0-10 bar

**POWER SUPPLY CABLE  
AND PLUG / MOTOR  
CABLE**  
only on version with cables





## Product range.

### GENYO 8A.

Power supply voltage: single phase 220-240V

Frequency: 50/60 Hz

Max current: 8A inductive

Protection class: IP 65

Fixed start pressure:

F12: 1.2 bar

F15: 1.5 bar

F22: 2.2 bar

Operating temperature: 0-60°C

Max pressure: 10 bar

Max flow rate: 10 m<sup>3</sup>/h (see flow resistance diagram)

Manual restart

Inlet-outlet connections: R1"

Pressure gauge (0÷10 bar)

Power supply cable and plug / motor:  
H07RN-F 3G1 - L = 1.5 m with Schuko\*  
plug / H07RN-F 3G1 - L = 0.5 m with  
cableheads (on version with cables)

\* UK, AU plug available on request



### GENYO 16A.

Power supply voltage: single phase 220-240V

Frequency: 50/60 Hz

Max current: 16A inductive

Protection class: IP 65

Adjustable start pressure (by means of special screw): R15 - 30 from 1,5 to 3,0 bar

Operating temperature: 0÷60°C

Max pressure: 10 bar

Max flow rate: 10 m<sup>3</sup>/h (see flow resistance diagram)

Automatic restart

Inlet-outlet connections: R1"

Pressure gauge (0÷10 bar)

Power supply cable and plug / motor:  
H07RN-F 3G1.5 -  
L = 1.5 m with Schuko\* plug / H07RN-F  
3G1.5 - L = 0.5 m with cableheads (on  
version with cables)


\* UK, AU plug available on request



## Standards and markings.


Suitable for use with potable water  
(French ACS approval and according to  
D.M. 06/04/2004 n. 174)

In compliance with  
Directive 2002/95/CE (RoHS)


	According to 2006/95/EC (Low Voltage Directive)
	According to 2004/108/EC (EMC Directive)
	EN 60730 - 2 - 6, EN 61000 - 6 - 2:2005, EN 61000 - 6 - 3 :2001

	C-Tick approval
---	-----------------


## Dimensional data. GENYO 8A

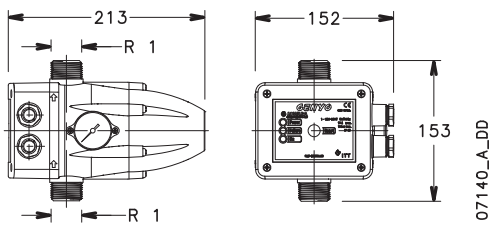


## GENYO 16A

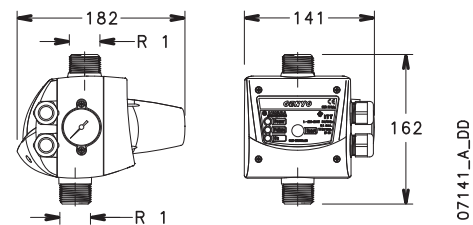

## Flow resistance diagram. GENYO 8A

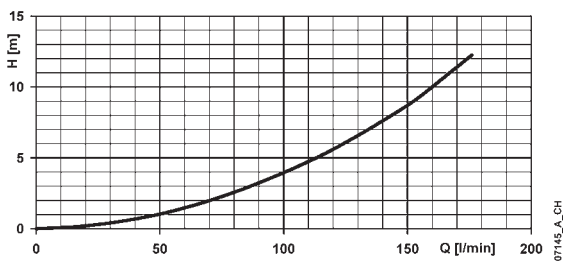

## GENYO 16A

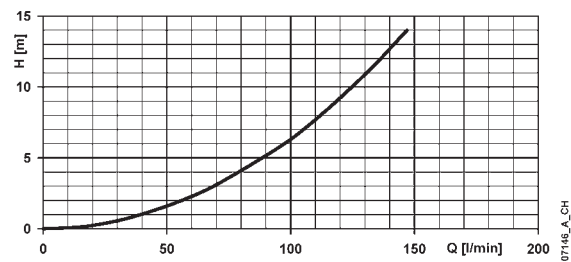

# What can Xylem do for you?

Xylem ['zɪləm]

- 1) The tissue in plants that brings water upward from the roots;
- 2) a leading global water technology company.

We're 12,000 people unified in a common purpose: creating innovative solutions to meet our world's water needs. Developing new technologies that will improve the way water is used, conserved, and re-used in the future is central to our work. We move, treat, analyze, and return water to the environment, and we help people use water efficiently, in their homes, buildings, factories and farms. In more than 150 countries, we have strong, long-standing relationships with customers who know us for our powerful combination of leading product brands and applications expertise, backed by a legacy of innovation.

**For more information on how Xylem can help you, go to [xylem.com](http://xylem.com).**



LOWARA S.r.l. Unipersonale  
Via Vittorio Lombardi, 14  
36075 Montecchio Maggiore  
Vicenza - Italy  
Tel. (+39) 0444 707111  
Fax (+39) 0444 492166  
e-mail: [lowara.mkt@xylem.com](mailto:lowara.mkt@xylem.com)  
[www.lowara.com](http://www.lowara.com)  
[www.completewatersystems.com](http://www.completewatersystems.com)

Lowara is a trademark of Xylem Inc. or one of its subsidiaries.