



## MULTI OUTLET | 3 WAY

Thanks for buying this ceiling rose from [www.enamelshades.co.uk](http://www.enamelshades.co.uk) we design and build them here in the UK to the highest specification. Please read the user instructions carefully and retain for reference.

### WARNING

- To comply with current wiring and building regulations installation should only be undertaken by a competent person.
- Ensure the circuit is isolated before installation.
- For indoor use only.
- Ceiling Rose max load 10kg (subject to ceiling strength).
- Max individual grip load 2kg
- Use fixings appropriate for the mounting surface. The ones supplied may not be suitable for your individual circumstances. If in doubt seek professional advice.
- Ensure flex and terminals are not subject to strain or twisting.
- Flex for pendants requires a minimum of 0.5mm<sup>2</sup> csa conductors

### CLEANING

- Ensure the circuit is isolated
- Wipe gently with a soft, dry cloth.
- Do not use wet or abrasive cleaning liquids.

### YOU WILL NEED

- Drill with 6mm bit
- Screwdriver



### INSTALLATION

**WARNING:** Metal lighting fittings must be earthed in accordance with current regulations.

**NOTE:** This instruction refers to the process only. You are responsible for ensuring that the fixing types you have are suitable for the surface you are mounting to.

It is usually easiest to wire the multi outlet rose before mounting and make the final connections to the lighting circuit at the time of mounting to the ceiling.

1. First mark the hole spacing using the mounting bracket as a template
2. Drill two holes at these spacings if required
3. Insert supplied or suitable wall plugs into holes if required
4. Fix bracket using self-tapping screws supplied
5. Complete wiring of flex within rose with WAGO connectors and fly leads as shown on wiring diagram. Ensure WAGO terminals are not subject to strain or twisting.
  - Strip flex to length indicated on WAGO terminal.
  - Lift orange lever up to open position.
  - Insert stripped conductor.
  - Close lever
6. Attach rose to bracket ensuring flex is not trapped.

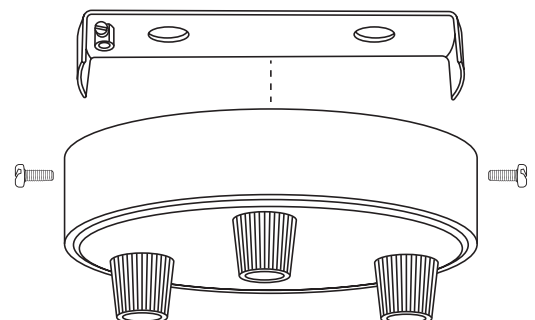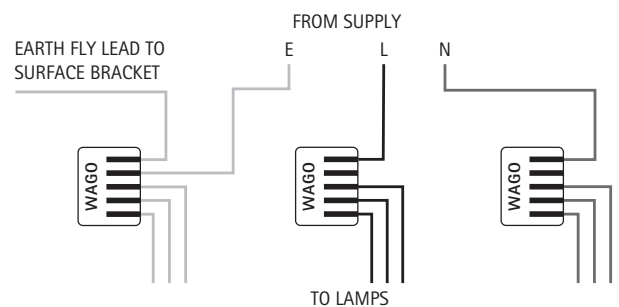

These ceiling roses do not contain any user serviceable parts. In the event of fault and damage please contact our customer service department on **0121 451 1799**

Fixed Luminaire CLASS I IP20 Max 240V

**This component must be earthed.**