

L21 Dimmer (1 Gang UK)

Features

- 280W smart dimmer
- Control by smartphone (requires Link Plus)
- 2-way communication: check status
- Timers / schedule / triggers / scene lighting
- Voice control with HomeKit / Alexa / Google
- Standard wiring (no neutral required)
- Fits standard 35mm single back box
- 10mm spacer included (7mm clearance)
- Soft Start capability
- Colour customisable LED indicator
- Auto calibrates to dimmable LED lamps
- Can perform wire-free multiway switching

Finishes




White metal



Stainless steel


LED
Indicator light.

On button
Tap to turn on.
Hold to raise light level.
Tap to reach full brightness when illuminated.

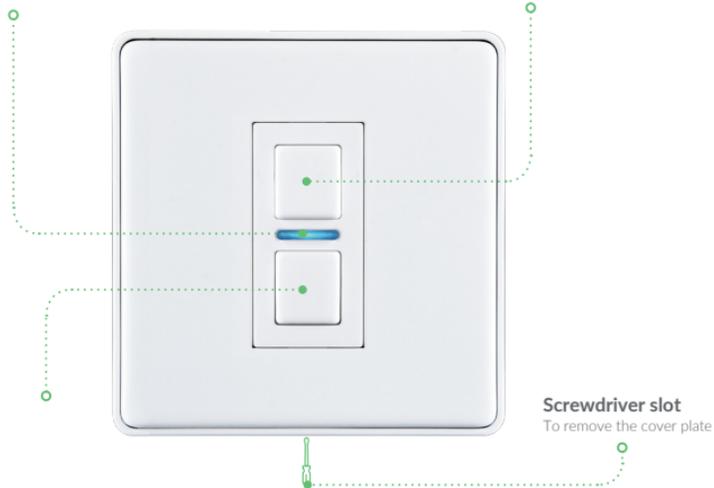

Off button
Tap to turn off.
Hold to decrease light level.

Screwdriver slot
To remove the cover plate

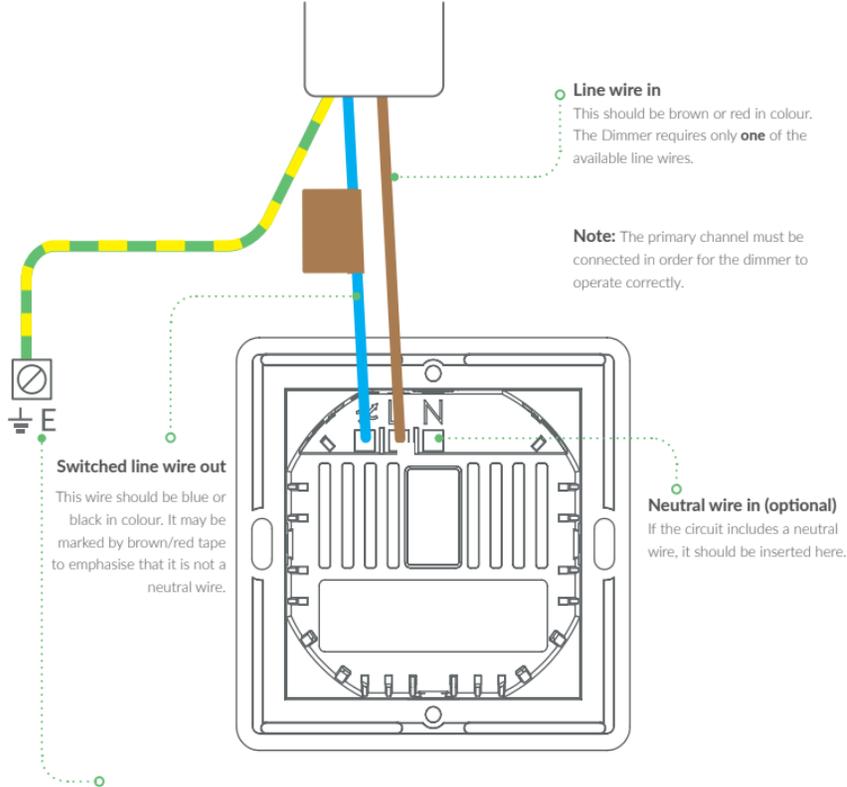

Specification

RF frequency: 868MHz

Input rating: 230V~50Hz

Output rating: 280W

Incandescent Load: 10-280W (0W min with neutral)

Back Box Depth: 35mm recommended

Earthing: optional (not required)

Standby Energy Use: <1W

Neutral: optional (not required)

Warranty: 2 years (standard)

Circuit Type: non-SELV

Operating temperature range: 0-35°

Compatible lamps

- Mains voltage incandescent lamps (max 280W)
- GU10 / HI spot halogen lamps (max 280W)
- Most dimmable LEDs (see www.lightwaverf.com)

Not compatible with:

- Wirewound transformers (generally older style)
- Electric motors
- CFLs and CFL tubes
- Non-dimmable LEDs