

PROJECT: _____	UNIT TAG: _____	QUANTITY: _____
REPRESENTATIVE: _____	TYPE OF SERVICE: _____	DATE: _____
ENGINEER: _____	SUBMITTED BY: _____	DATE: _____
CONTRACTOR: _____	APPROVED BY: _____	DATE: _____
	ORDER NO.: _____	DATE: _____





SQF 1.2-2 N

Renewable energy submersible pumps with built in inverter for solar, wind and AC powersource. Runs on both AC and DC voltage

Note! Product picture may differ from actual product

Conditions of Service		Pump Data		Motor Data	
Liquid:	Water	Liquid max temp:	40 °C	Enclosure class:	IP68
Temperature:	20 °C	Product number:	99612466	Insulation class:	F
Specific Gravity:	1.000			Motor protection:	Y
				Thermal protection:	internal
				Motor type:	MSF3N

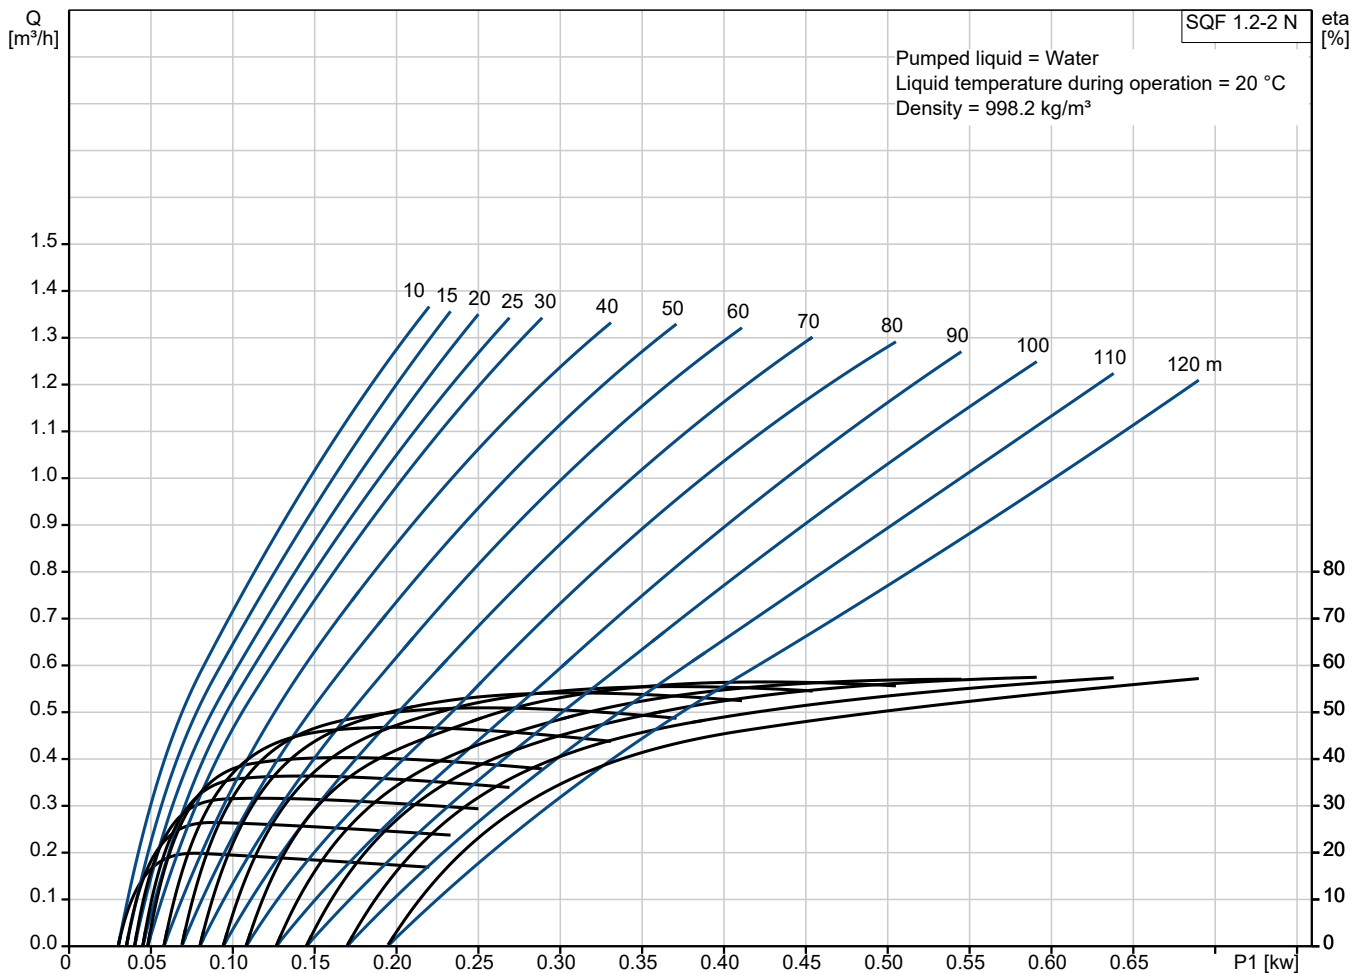

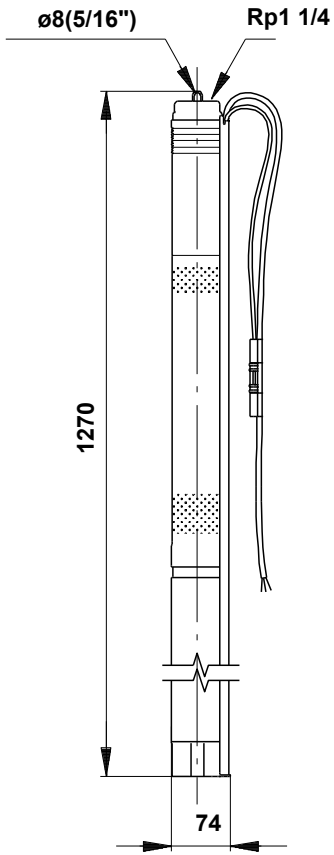

Materials:

- Pump: Stainless steel
- Pump: DIN W.-Nr. 1.4401
- Pump: AISI 316
- Impeller: DIN W.-Nr. 1.4401

Qty.	Description
------	-------------

1	SQF 1.2-2 N
---	-------------



Note! Product picture may differ from actual product

Product No.: [99612466](#)

The 3" SQFlex centrifugal pump is for medium heads and flow rates.

The SQFlex system is a reliable water supply system based on renewable energy sources, such as solar and wind energy.


Thanks to its flexible energy supply and performance, the SQFlex system can be combined and adapted to meet any need on the installation site.

The SQFlex system has a wide voltage range, built-in maximum power point tracking (MPPT) as well as dry-running, voltage and overload protection.






Company name: Land and Water Technology
Created by:
Phone: 08 9209 3330
Email: orders@landwater.com.au
Date: 4/21/2023


99612466 SQF 1.2-2 N

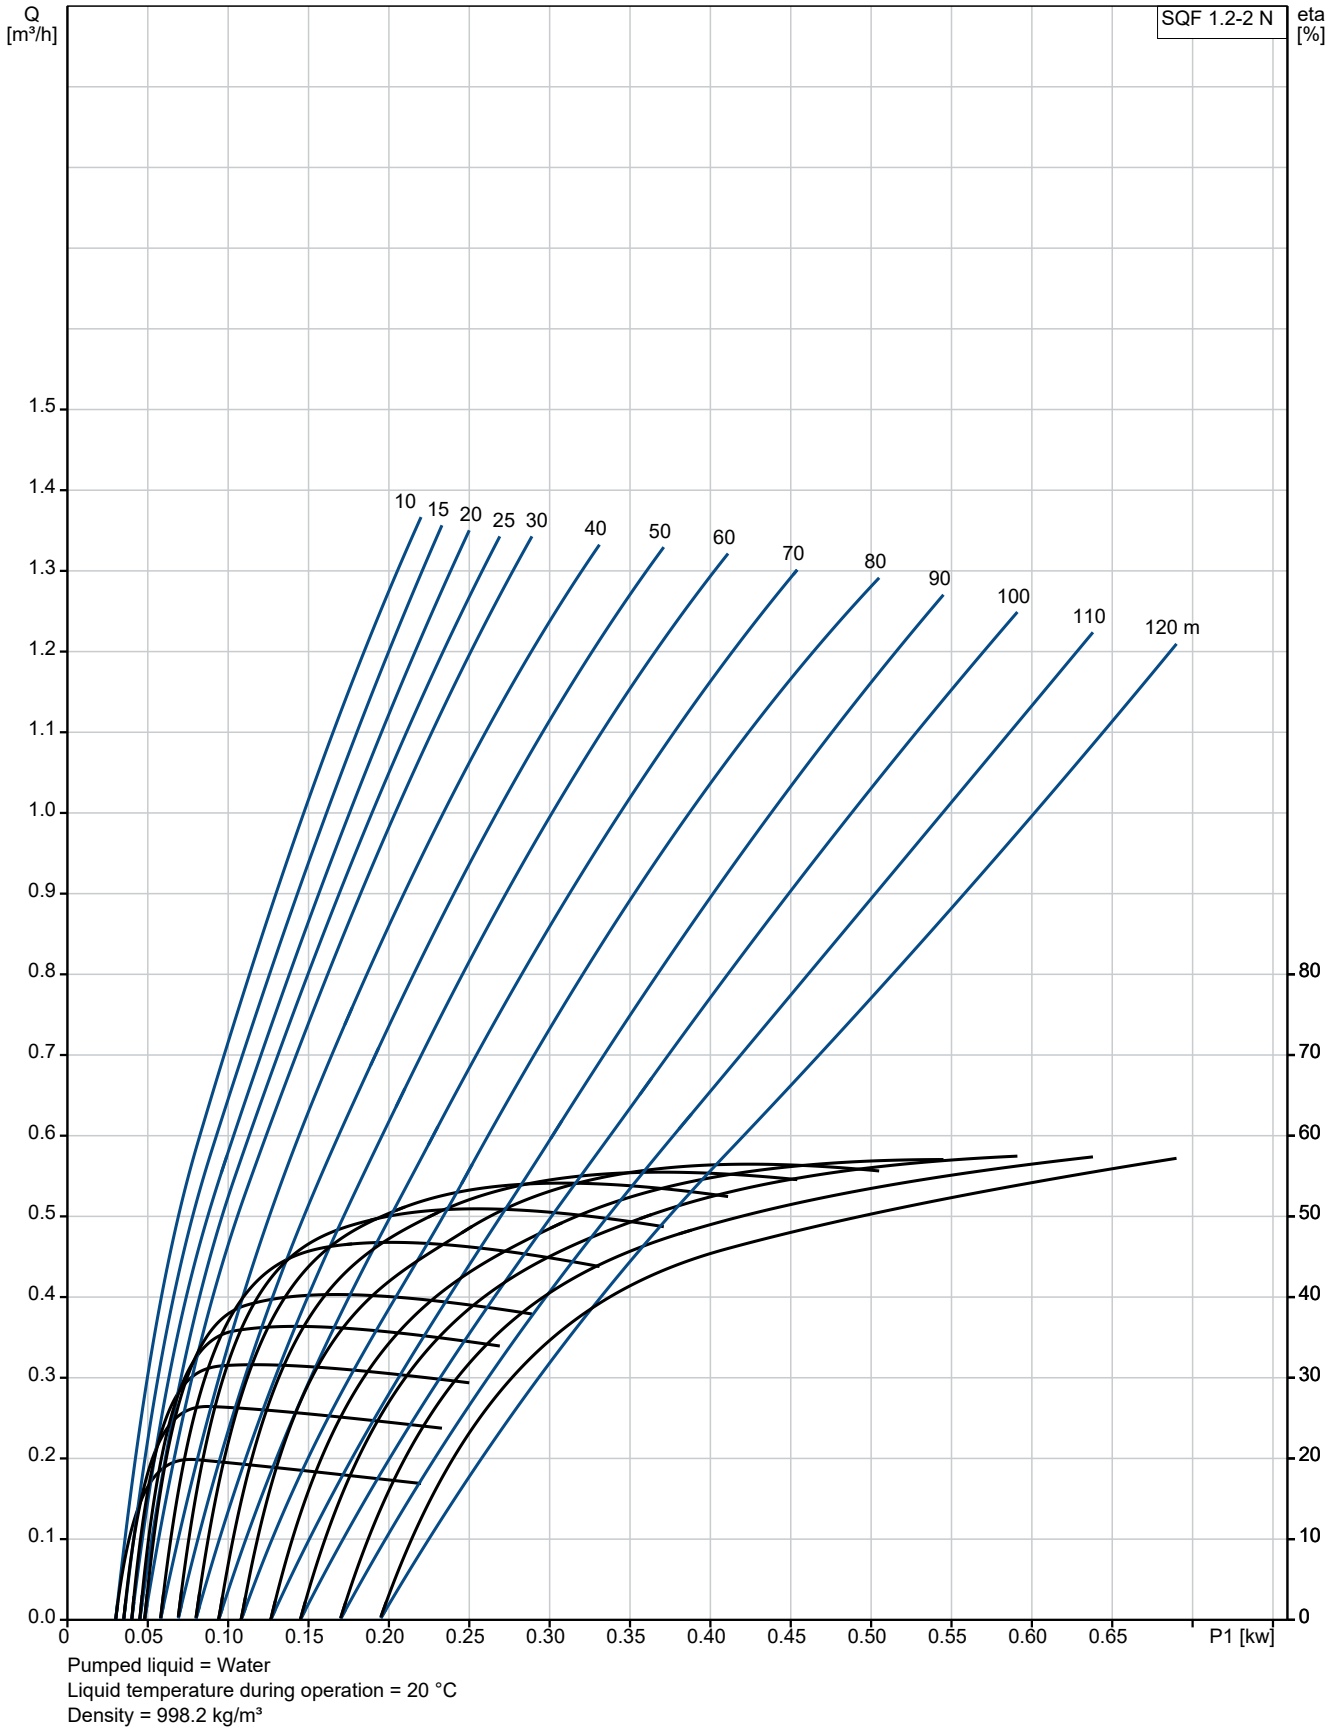

Description	Value
General information:	
Product name:	SQF 1.2-2 N
Product No:	99612466
EAN number:	5713831899785
Technical:	
Stages:	2
Approvals:	UKCA,CE,EAC,CN RoHS Exempt,Morocco, Sepro
Pump No:	95027412
Valve:	pump with built-in non-return valve
Zinc Anodes:	Yes, pump and motor
Materials:	
Pump:	Stainless steel
Pump:	DIN W.-Nr. 1.4401
Pump:	AISI 316
Impeller:	DIN W.-Nr. 1.4401
Installation:	
Maximum ambient pressure:	15 bar
Pump outlet:	Rp 1 1/4
Minimum borehole diameter:	76 mm
Liquid:	
Pumped liquid:	Water
Liquid max temp:	40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Motor type:	MSF3N
Power input - P1:	1.4 kW
Rated voltage ac:	1 x 90-240 V
Rated voltage dc:	30-300 V
Rated current:	8.4 A
Power factor:	1.0
Rated speed:	3600 rpm
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Built-in motor protection:	Y
Thermal protec:	internal
Length of cable:	2 m
Motor No:	96275341
Udc:	300 V
Udc:	30 V
Others:	
Minimum efficiency index, MEI ≥:	---
Net weight:	7.95 kg
Gross weight:	11 kg
Shipping volume:	0.024 m ³
Sales region:	Australia
Country of origin:	MX
Custom tariff no.:	84137090621519197

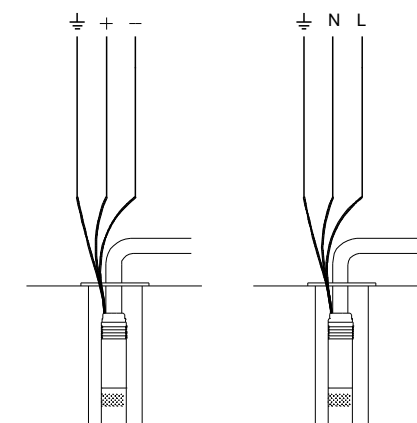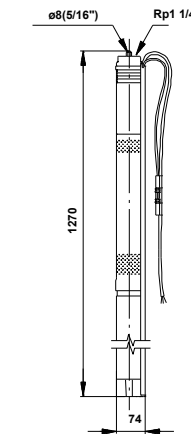
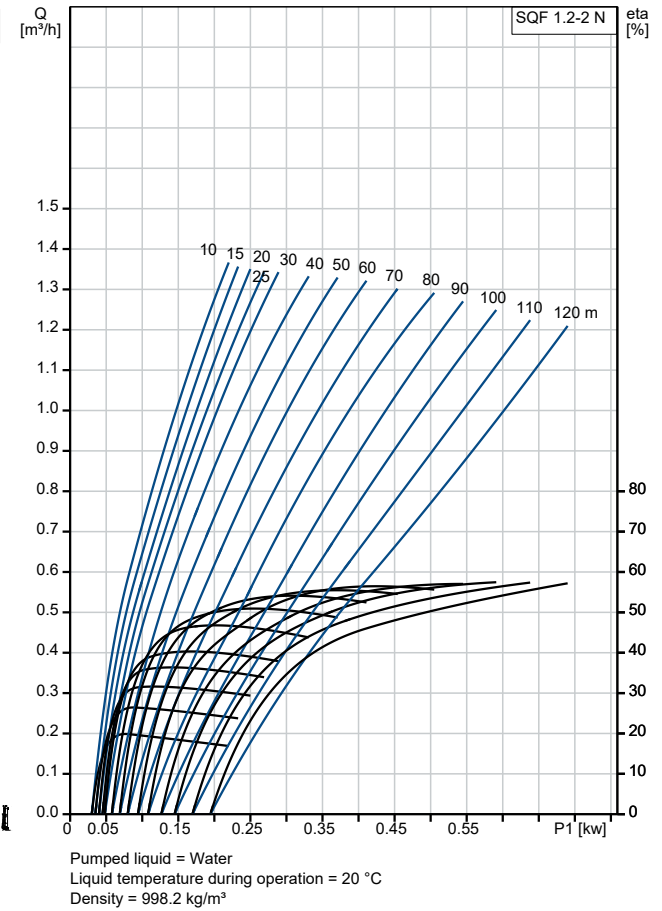


99612466 SQF 1.2-2 N

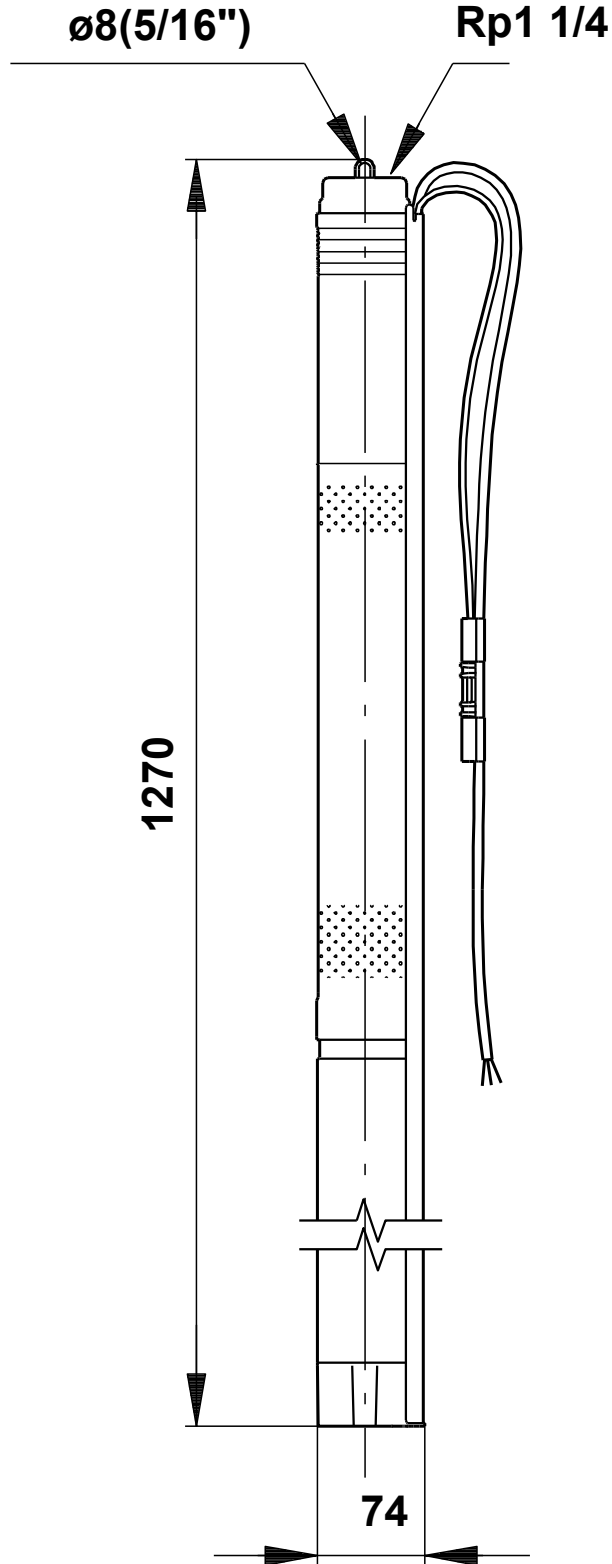

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

99612466 SQF 1.2-2 N

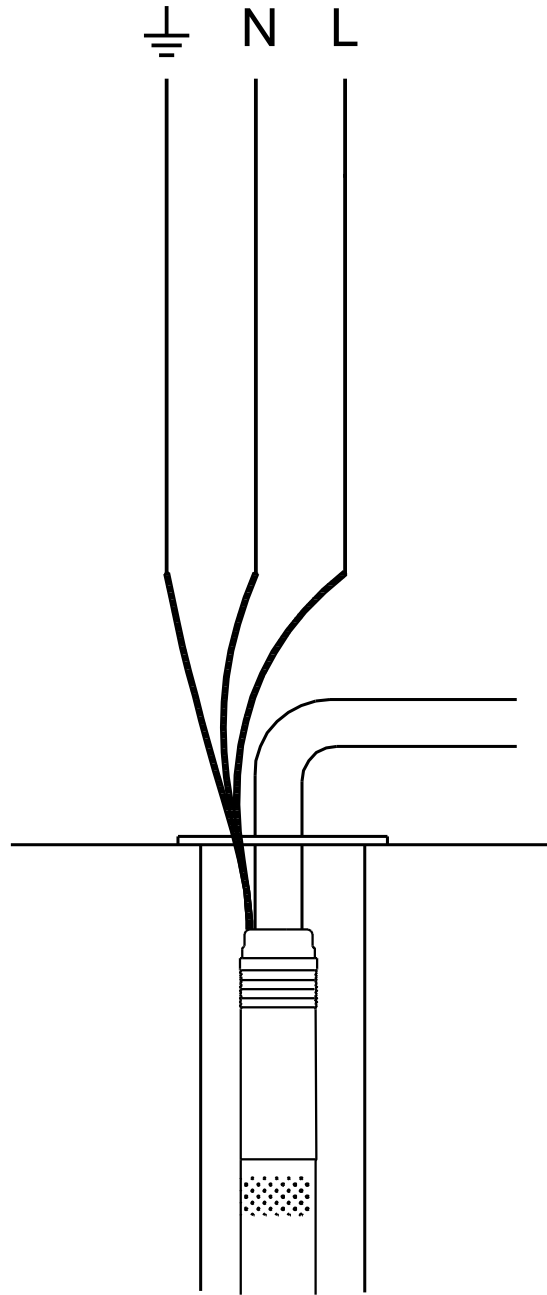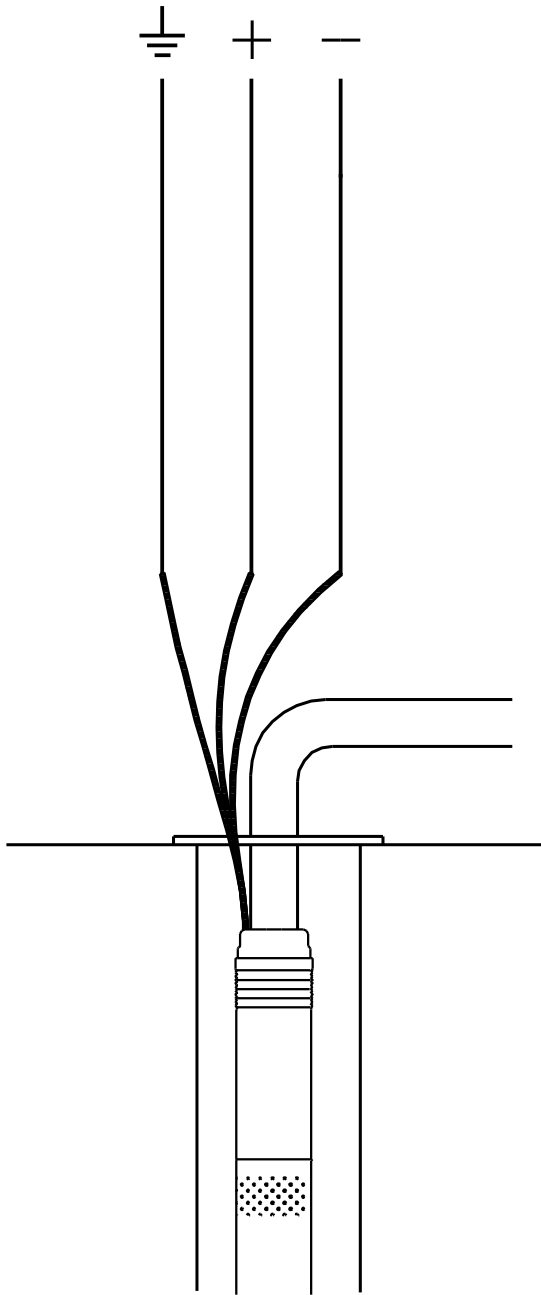

Note! All units are in [mm] unless others are stated.

